UNIFORM STANDARD DETAILS for PUBLIC WORKS CONSTRUCTION

SPONSORED and DISTRIBUTED by the

MARICOPA ASSOCIATION of GOVERNMENTS

1998

ARIZONA

(Includes Revisions Through 2008)

100 SERIES: GENERAL INFORMATION

101 GENERAL INFORMATION
110 PLAN SYMBOLS
112 DIMENSIONING FOR ROAD IMPROVEMENT PLANS
120-1 SURVEY MARKER
120-2 SURVEY MARKER (FOR UNINCORPORATED AREAS OF THE COUNTY)
130 BARRICADES
131 STREET SIGN BASE
135-1 STEEL GUARD RAIL
135-2 STEEL GUARD RAIL
135-3 STEEL GUARD RAIL
135-4 STEEL GUARD RAIL
140 SAFETY POST
145 SAFETY RAIL
150 PRECAST SAFETY CURB
160 6' CHAIN LINK FENCE AND GATE
170 TYPICAL RUNWAY OR TAXIWAY LIGHTING DETAIL
190 ROCK CORRECTION PROCEDURE FOR MAXIMUM DENSITY DETERMINATION

200 SERIES: STREET INFORMATION

200 BACKFILL, PAVEMENT AND SURFACE REPLACEMENT
201 PAVEMENT SECTION AT TERMINATION
202 ALLEY DETAILS (PAVED AND UNPAVED)
203 SCUPPERS
204 EQUIPMENT CROSSING
205 PAVED TURNOUTS
206-1 CONCRETE SCUPPER
206-2 CONCRETE SCUPPER
206-3 CONCRETE SCUPPER
210 RESIDENTIAL SPEED HUMP
211 STANDARD TRENCH PLATING DETAIL
212 UTILITY POTHOLE REPAIR
220-1 CURB AND GUTTER - TYPES 'A', 'B', 'C', AND 'D'
220-2 CURB AND GUTTER - TYPES 'E' AND 'F'
221 CURB AND GUTTER (TRANSITION, INTEGRAL AND WARNING BEACON)
222 SINGLE CURB - TYPES 'A', 'B' AND TERMINATION
223 MEDIAN NOSE TRANSITION
224 JOINT FOR DRAINAGE INLETS AND MANHOLE COVERS
225 CONCRETE PAVERS
230 SIDEWALKS
231 SIDEWALK RAMPS - TYPE 'A'

200 SERIES: STREET INFORMATION (CONTINUED)

232 SIDEWALK RAMPS - TYPE 'B'
233 SIDEWALK RAMPS - TYPE 'C'
234 SIDEWALK RAMPS - TYPE 'D'
240 VALLEY GUTTER
250 DRIVEWAY ENTRANCES
251 RETURN TYPE DRIVEWAYS
252 BUS AND PARKING BAYS
260 ALLEY ENTRANCE (WITH COMBINED CURB AND GUTTER)
261 ALLEY ENTRANCE (WITH ROLL TYPE CURB AND GUTTER)
262 WING TYPE ALLEY ENTRANCE (WITH COMB. CURB & GUTTER)
263 WING TYPE ALLEY ENTRANCE (WITH ROLL CURB & GUTTER)
270 FRAME AND COVER (AND GRADE ADJUSTMENTS)

300 SERIES: WATER INFROMATION

301 BLOCKING FOR WATER GATE AND BUTTERFLY VALVES
302-1 JOINT RESTRAINT WITH TIE RODS
302-2 JOINT RESTRAINT WITH TIE RODS
303-1 JOINT RESTRAINT FOR DUCTILE IRON AND POLYETHYLENE WRAPPED DUCTILE IRON WATER PIPES
303-2 JOINT RESTRAINT FOR DUCTILE IRON AND POLYETHYLENE WRAPPED DUCTILE IRON WATER PIPES
310 CAST IRON WATER METER BOX COVER NO. 1
311 CAST IRON WATER METER BOX COVER NO. 2
312 CAST IRON WATER METER BOX COVER NO. 3
313 CAST IRON WATER METER BOX COVER NO. 4
314 CAST IRON WATER METER BOX COVER NO. 5
320 CONCRETE WATER METER BOXES
321 STANDARD WATER METER VAULT
340 INSTALLING TAPPING SLEEVES AND VALVES
342 CONCRETE PRESSURE PIPE TAPPING SLEEVE
345-1 3", 4", 6" WATER METER
345-2 4", 6", WATER METER WITH ON-SITE FIRE HYDRANTS
346 FIRE LINE DETECTOR CHECK VAULT
360 FIRE HYDRANT INSTALLATION
362 LOCATIONS FOR NEW HYDRANTS
370 VERTICAL REALIGNMENT OF WATER MAINS
380 THRUST BLOCKS FOR WATER LINES
381 ANCHOR BLOCKS FOR VERTICAL BENDS
389 CURB STOP WITH VALVE BOX AND COVER
390 CURB STOP WITH FLUSHING PIPE
391-1 VALVE BOX INSTALLATION AND GRADE ADJUSTMENT
391-2 VALVE BOX INSTALLATION
392 DEBRIS CAP INSTALLATION

400 SERIES: SEWER INFORMATION

402 ENCASED PIPE FOR CANAL CROSSINGS
403–1 PIPE SUPPORTS ACROSS TRENCHES
403–2 PIPE SUPPORTS ACROSS TRENCHES
403–3 ALTERNATE TO PIPE SUPPORT
404–1 WATER AND SANITARY SEWER SEPARATION/PROTECTION
404–2 WATER AND SANITARY SEWER SEPARATION/PROTECTION
404–3 WATER AND SANITARY SEWER SEPARATION/PROTECTION
405 BROKEN SEWER LINE REPLACEMENT
420–1 PRE–CAST CONCRETE SEWER MANHOLE
420–2 PRE–CAST CONCRETE SEWER MANHOLE
421 OFFSET MANHOLE FOR 8" – 30" PIPE
422 BRICK SEWER MANHOLE & COVER FRAME ADJUSTMENT
423 WATER TIGHT 30" MANHOLE FRAME AND COVER
424 24" AND 30" MANHOLE FRAME AND COVER
425 24" ALUMINUM MANHOLE FRAME AND COVER
426 DROP SEWER CONNECTIONS
427 STUB OUT AND PLUGS
428 MANHOLE STEPS
429 INDUSTRIAL WASTE CONTROL VAULT WITH MANHOLE
440–1 SEWER BUILDING CONNECTIONS – TYPE 'A' ELECTRONIC BALL MARKERS (STANDARD)
440–2 SEWER BUILDING CONNECTIONS – TYPE 'B' TWO–WAY CLEANOUT AND METER BOX AT R/W
440–3 SEWER BUILDING CONNECTIONS – TYPE 'C' ONE–WAY CLEANOUT AND METER BOX
440–4 SEWER SERVICE CURB CROSSING STAMP DETAIL
441 SEWER CLEANOUT

500 SERIES: IRRIGATION AND STORM DRAIN INFORMATION

501–1 HEADWALL
501–2 HEADWALL
501–3 HEADWALL – 42" TO 84" PIPE
501–4 HEADWALL IRRIGATION 18" TO 60" PIPE
501–5 HEADWALL – DROP INLET
502–1 TRASH RACK
502–2 TRASH RACK

500 SERIES: IRRIGATION AND STORM DRAIN INFORMATION (CONTINUED)

503 IRRIGATION STANDPIPE
504 CONCRETE BLOCK JUNCTION BOX
505 CONCRETE PIPE COLLAR
506 IRRIGATION VALVE INSTALLATION
507 ENCASED CONCRETE PIPE (SHALLOW INSTALLATION)
510 CORRUGATED METAL PIPE AND INSTALLATION
520 STORM DRAIN MANHOLE BASE (48" OR SMALLER)
521 STORM DRAIN MANHOLE BASE (51" OR LARGER)
522 STORM DRAIN MANHOLE SHAFT
523–1 PRESSURE MANHOLE
523–2 PRESSURE MANHOLE
524 STORM DRAIN LATERAL PIPE CONNECTIONS
530 3'–6" CURB OPENING CATCH BASIN – TYPE 'A
531 5'–6" CURB OPENING CATCH BASIN – TYPE 'B'
532 8' CURB OPENING CATCH BASIN – TYPE 'C'
533–1 CATCH BASIN TYPE 'D'
533–2 CATCH BASIN TYPE 'D'
533–3 CATCH BASIN TYPE 'D'
534–1 CATCH BASIN – TYPE 'E'
534–2 CATCH BASIN – TYPE 'E' (DETAILS)
534–3 CATCH BASIN – TYPE 'E' (DETAILS)
534–4 CATCH BASIN – TYPE 'E' (DETAILS)
534–5 ALTERNATE GRATE STYLES – SUMP LOCATION
535 CATCH BASIN – TYPE 'F' – FOR USE WITHOUT CURB
536–1 COMMON DETAILS AND SECTIONS FOR CURB OPENING CATCH BASINS
536–2 ALTERNATE COVER FOR CURB OPENING CATCH BASINS
537 CATCH BASIN – TYPE 'G'
538 CATCH BASIN – TYPE 'H'
539 GRATES FOR CATCH BASINS – TYPE 'G' AND 'H'
540–1 CATCH BASIN GRATES
540–2 CATCH BASIN GRATES
541 CATCH BASIN SUBGRADE DRAIN
545 END SECTION – REINFORCED CONCRETE PIPE
550 SPILLWAY INLET AND OUTLET
552 CONCRETE CUT–OFF WALLS
555 EROSION PROTECTION/RIPRAP

1. THESE DETAILS HAVE BEEN PREPARED IN AN EFFORT TO STANDARDIZE THE CONSTRUCTION DETAILS USED BY VARIOUS CONTRACTING AGENCIES IN MARICOPA COUNTY. THEY ARE TO BE USED IN CONJUCTION WITH THE CURRENT METRIC EDITION OF THE "UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION" SPONSORED AND DISTRIBUTED BY THE MARICOPA ASSOCIATION OF GOVERNMENTS.

2. MANY NOTES WITHIN THESE DETAILS REFER TO VARIOUS SECTIONS OF THE "UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION." WHERE THIS REFERENCE IS MADE, ONLY THE ABBREVIATION "SECT." IS USED. AN EXAMPLE OF THIS REFERENCE WOULD BE: "CLASS 'A' CONCRETE PER SECT. 725."

3. MANY NOTES WITHIN THESE DETAILS REFER TO OTHER DETAILS WITHIN THIS BOOK. WHERE THIS REFERENCE IS MADE, THE ABBREVIATION "DETAIL" IS USED. AN EXAMPLE OF THIS WOULD BE: "SEE DETAIL 391 FOR VALVE BOX INSTALLATION."

4. MANY DETAILS COVER MORE THAN ONE SHEET. THESE SHEETS HAVE BEEN GIVEN THE SAME NUMBER WITH A SUFFIX NUMBER, EXAMPLE: 391–1 AND 391–2.

5. AN EFFORT HAS BEEN MADE TO INCLUDE THE MOST COMMONLY USED CONSTRUCTION DETAILS IN THIS BOOK. ITEMS WHICH REQUIRE DESIGN CONSIDERATION BY THE DESIGNING ENGINEER HAVE NOT BEEN INCLUDED.

6. SOME OF THE DETAILS PRINTED HEREIN MAY BE USED BY SOME OF THE AGENCIES BUT NOT OTHERS. THE DESIGNING ENGINEER SHOULD THEREFORE CONTACT THE AGENCY WITHIN WHOSE JURISDICTION HE IS WORKING FOR DIRECTION AS TO WHICH DETAIL OR PORTIONS OF DETAILS SHOULD BE USED.

7. DETAIL DRAWINGS ARE NOT TO SCALE.

CONCRETE PVMT. SECTION

SUBGRADE SEAL SECTION

SELECT MATERIAL SECTION

AGGREGATE BASE SECTION

BITUMINOUS PVMT. SECTION

EXISTING PAVEMENT

OBLITERATE PAVEMENT

CONCRETE PAVEMENT

BITUMINOUS PAVEMENT

SECTION LINE

ROADWAY CENTER LINE

SURVEY MONUMENT

FIRE HYDRANT

WATER METER

WATER OR GAS VALVE

GAS METER

MANHOLE

SEWER CLEANOUT

RAILROAD

IRRIGATION LINE

24"

IRRIGATION STANDPIPE

"L" HEADWALL

2'

TELEPHONE OR TEL. LINE

POWER OR JOINT LINE

DOWN GUY & ANCHOR

STREET LIGHT

STREET SIGN

TRAFFIC SIGN

TRAFFIC SIGNAL LIGHT

TS

SIDEWALK

CURB & GUTTER

VALLEY GUTTER

SINGLE GUTTER

SINGLE CURB

MAIL BOX

EXISTING WATER LINE 6" W

EXISTING TELEHONE LINE T

EXISTING SEWER LINE 8" S

EXISTING GAS LINE 8" G

EXISTING STORM DRAIN LINE 12" SD

EXISTING IRRIGATION LINE 12" IRR

DETAIL NO. 110	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	PLAN SYMBOLS	REVISED	DETAIL NO. 110

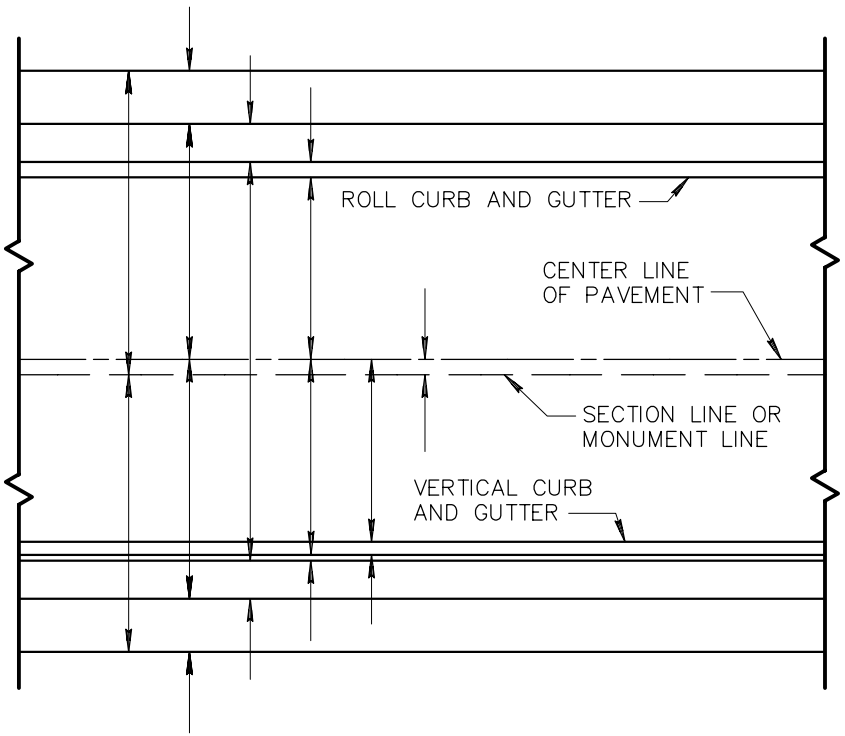

DIMENSION SHOULD BE GIVEN ONCE ON EACH SHEET AND SHOULD BE PLACED NEAR THE CENTER OF THE SHEET. IF ANY OF THE GIVEN CONDITIONS CHANGE, THEY SHOULD BE REDIMENSIONED AT THE POINT OF CHANGE.

GIVEN DIMENSIONS IN ORDER STARTING WITH THE LONGEST AND ENDING WITH THE SHORTEST, AS SHOWN IN THE SKETCH.

GIVE COMPLETE DIMENSIONS.

IF THE CENTERLINE OF PAVEMENT DOES NOT FALL ON THE SECTION LINE OR MONUMENT LINE OF THE STREET, DIMENSION AS ABOVE AND SHOW THE DIFFERENCE BETWEEN THE SECTION OR MONUMENT LINE AND THE CENTERLINE.

DETAIL NO.			REVISED	DETAIL NO.
112	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**DIMENSIONING FOR ROAD IMPROVEMENT PLANS**		112

NOTES:

1. TYPE 'A' TO BE USED AT INTERSECTIONS OF MAJOR STREETS & COLLECTOR STREETS, AND AT OTHER SPECIAL PONTS IF REQUIRED BY ENGINEER, AS SHOWN ON PLANS.
2. TYPE 'B' TO BE USED AT INTERSECTION OF STREET CENTERLINES (EXCEPT WHERE TYPE 'A' IS SPECIFIED), CORNERS OR CHANGES IN ALIGNMENT OF SUBDIVISION BOUNDARIES (WHEN THEY FALL IN PAVEMENT), P.C.'S AND P.T.'S OF CURVES. WHEN P.I. FALLS IN PAVEMENT, THEN THE P.I. SHALL BE MONUMENTED.
3. TYPE 'C' TO BE USED AT CORNERS OF, AND CHANGE IN ALIGNMENT OF, SUBDIVISION BOUNDARIES WHERE CORNERS OR CHANGE POINTS FALL OUTSIDE OF PAVED AREAS OR IN ALLEYS.
4. LETTERS TO BE APPROX. 1/32" WIDE & 1/32" DEEP.
5. USE STANDARD WROUGHT IRON WASHER 3" O.D. x 11/64" THICK WITH 1-3/8" HOLE
6. CAP TO BE CONSTRUCTED OF RED BRASS OR BRONZE.
7. FRAME & COVER TO INCLUDE CHAIN PER DET. 270. (OPTIONAL PER AGENCY REQUIREMENTS.)

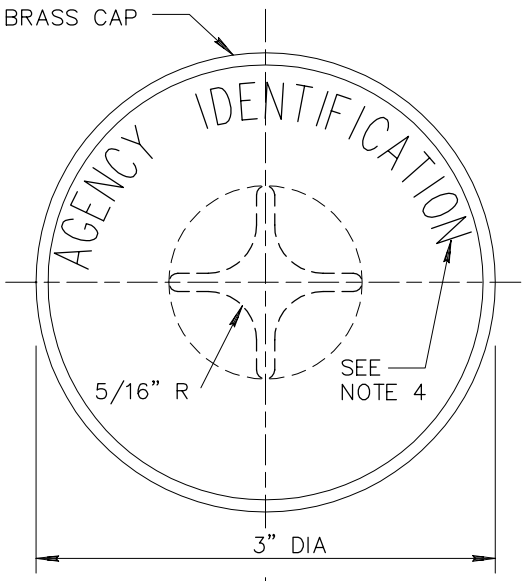

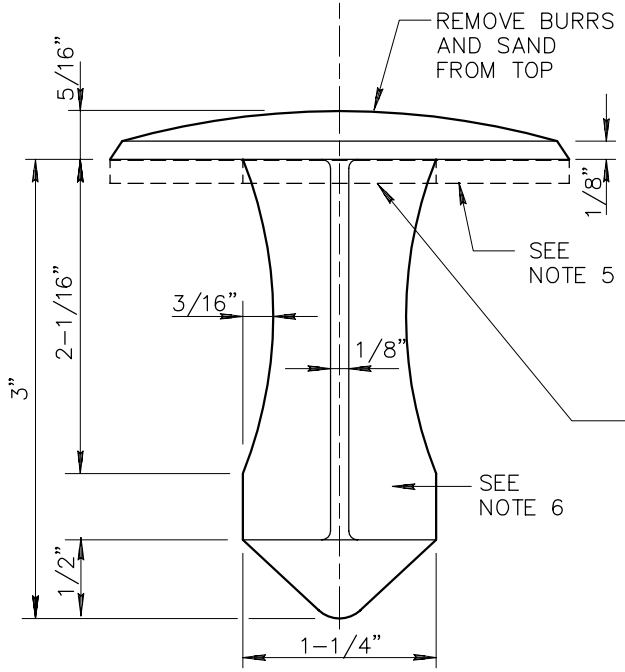

CAP DETAIL

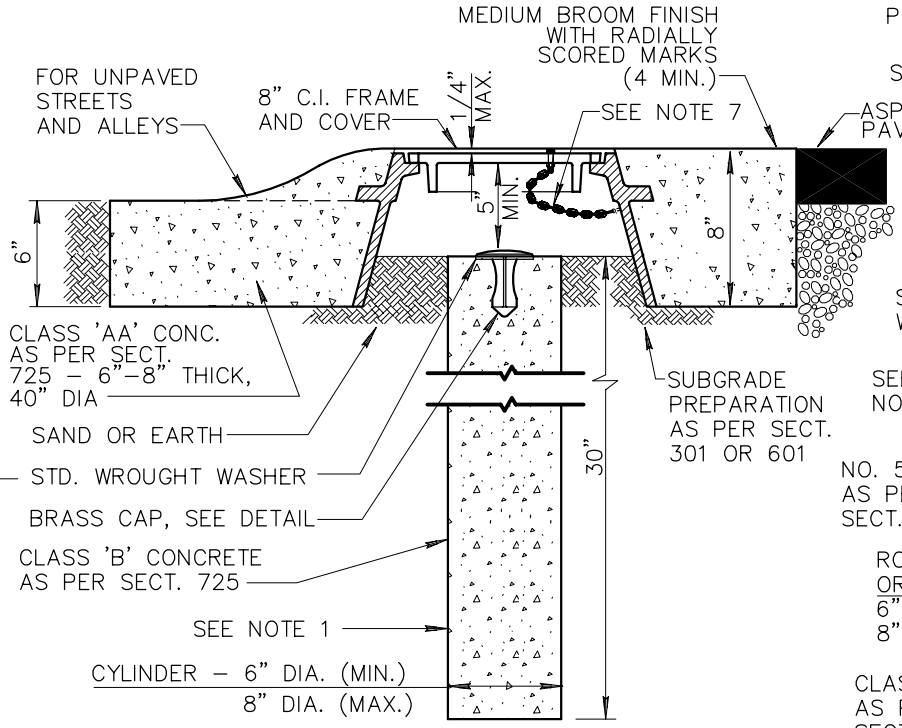

TYPE 'A'
(WITH FRAME PER DETAIL 270)

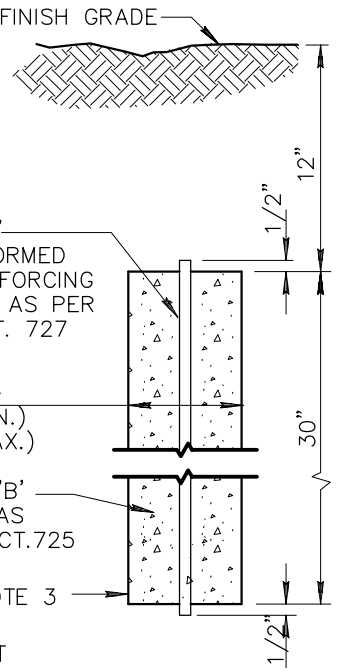

TYPE 'C'

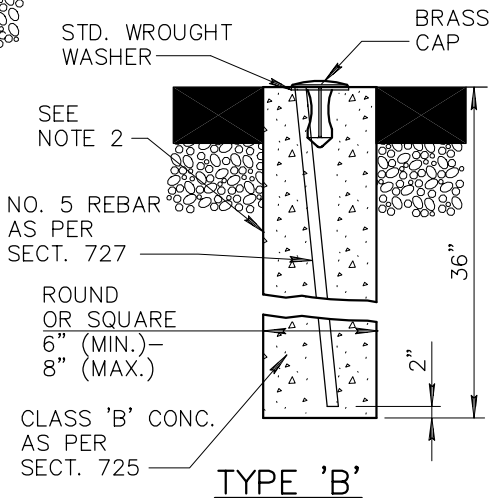

TYPE 'B'
(WITHOUT FRAME)

DETAIL NO.			REVISED	DETAIL NO.
120-1	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	SURVEY MARKER	01-01-2001	120-1

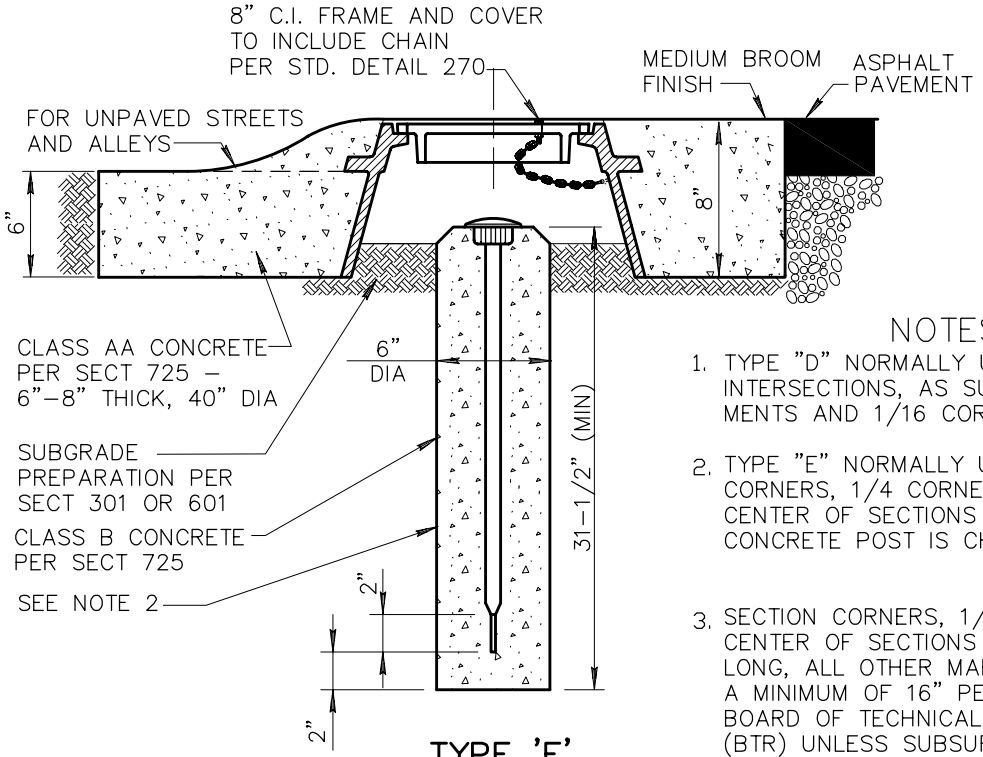

TYPE 'E'
(WITH FRAME)

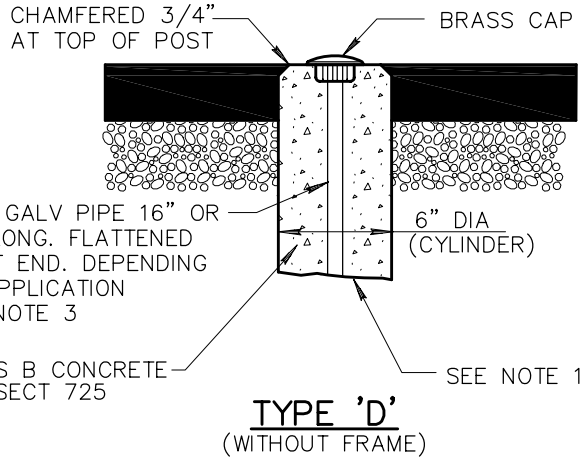

TYPE 'D'
(WITHOUT FRAME)

NOTES:

1. TYPE "D" NORMALLY USED AT STREET INTERSECTIONS, AS SUBDIVISION MONUMENTS AND 1/16 CORNERS.
2. TYPE "E" NORMALLY USED ON SECTION CORNERS, 1/4 CORNERS AND AT THE CENTER OF SECTIONS (PER ARS 33–103). CONCRETE POST IS CHAMFERED 3/4" AT TOP.
3. SECTION CORNERS, 1/4 CORNERS AND CENTER OF SECTIONS SHALL BE 30" LONG, ALL OTHER MARKERS SHALL BE A MINIMUM OF 16" PER THE ARIZONA BOARD OF TECHNICAL REGISTRATION (BTR) UNLESS SUBSURFACE OBSTRUCTIONS LIMIT LENGTH.
4. IN ALL CASES, THE POINT SURVEYED SHALL BE IDENTIFIED BY A PUNCH MARK AND IN ADDITION THE CAP SHALL BE STAMPED WITH THE REGISTERED LAND SURVEYOR (RLS) REGISTRATION NUMBER AND YEAR.
5. WHEN APPLICABLE, STAMP THE APPROPRIATE PUBLIC LAND MARKINGS PER CURRENT MANUAL OF INSTRUCTIONS FOR THE SURVEY OF THE PUBLIC LANDS OF THE UNITED STATES, PREPARED BY THE BUREAU OF LAND MANAGEMENT.
6. IN ALL CASES WHEN MONUMENTS ARE SET A CORNER RECORD OR RESULTS OF SURVEY SHALL BE RECORDED. (PER BTR)

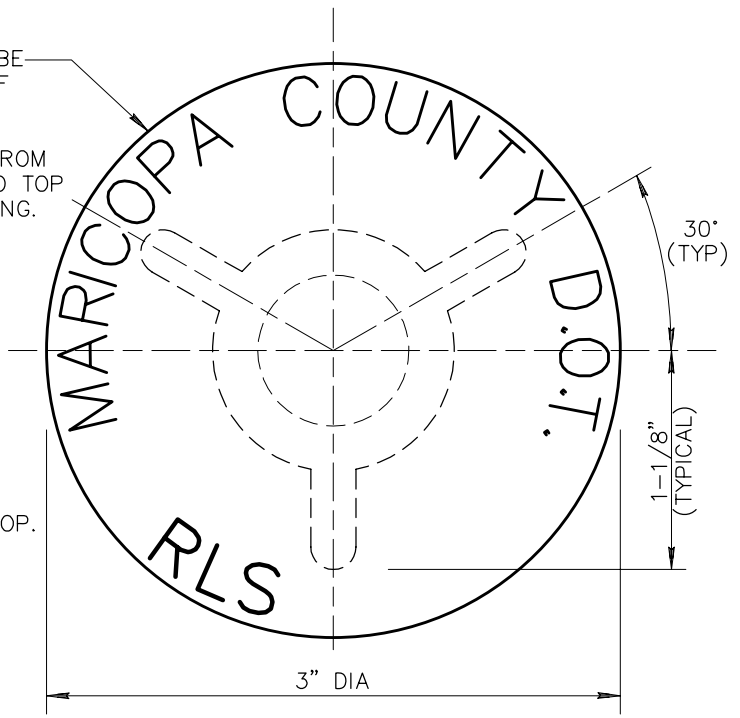

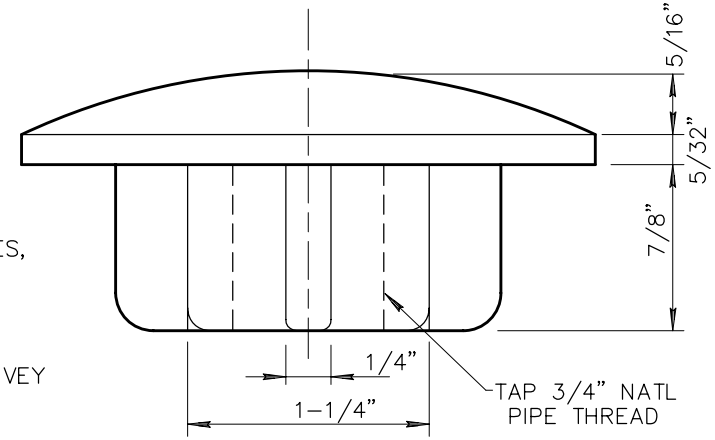

CAP DETAIL

DETAIL NO.		STANDARD DETAIL		REVISED	DETAIL NO.
120-2	MARICOPA ASSOCIATION of GOVERNMENTS	ENGLISH	SURVEY MARKER (FOR UNINCORPORATED AREAS OF COUNTY)	01-01-2007	120-2

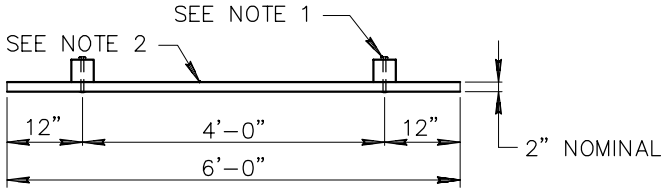

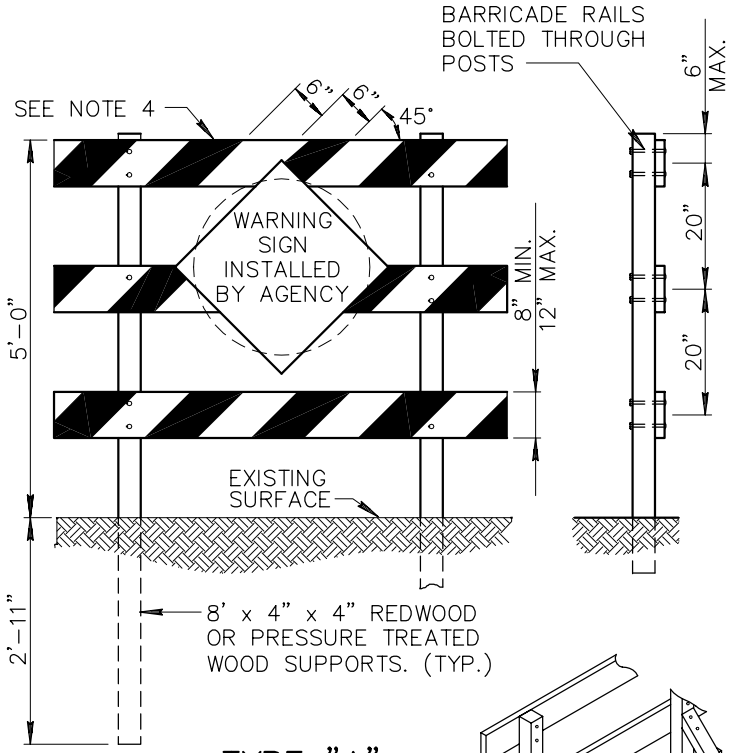

TYPE "A"

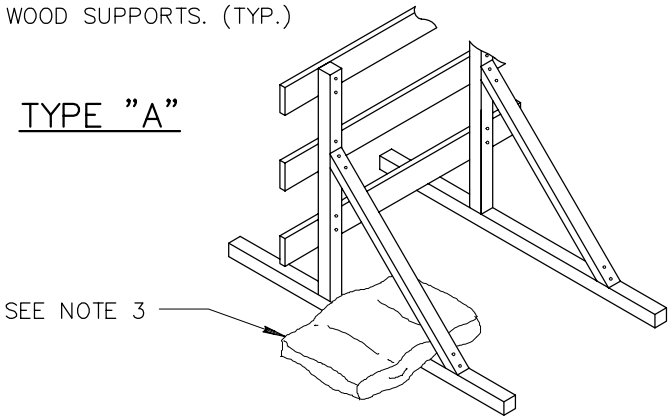

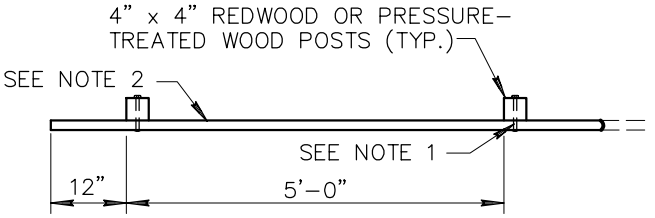

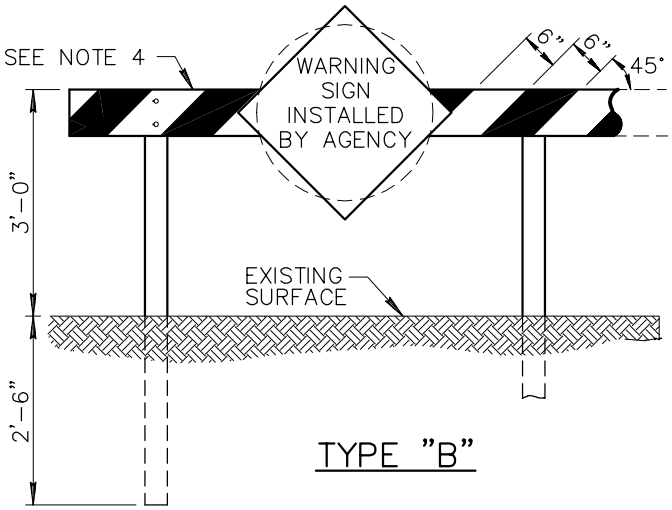

TYPE "B"

NOTES:

1. FASTEN WITH 1/2" x 5" LAG SCREWS WITH 2 FLAT WASHERS OR (2) 5/8" BOLTS, WITH 4 FLAT WASHERS.
2. 2" x 8" DOUGLAS FIR PLANK (LENGTH TO BE DETERMINED ON PLANS.)
3. WHEN BARRICADE (TYPE "A") IS CONSTRUCTED ON BASES INSTEAD OF POSTS SET INTO THE GROUND, IT MAY BE DESIRABLE TO BALLAST THE BASES WITH SAND BAGS OR BY STAKING TO PROVIDE RESISTANCE TO OVERTURNING DURING PERIODS OF HIGH WINDS.
4. TWO COATS OF WHITE PAINT PER SECTION 790 SHALL BE APPLIED TO ALL EXPOSED SURFACES OF THE BARRICADE. AN ADDITIONAL TWO COATS OF ORANGE PAINT PER SECTION 790 SHALL BE APPLIED TO CREATE THE ALTERNATE ORANGE AND WHITE STRIPES FOR TEMPORARY BARRICADES AND TWO COATS OF RED PAINT PER SECTION 790 SHALL BE APPLIED TO CREATE ALTERNATE RED AND WHITE STRIPES FOR PERMANENT BARRICADES. HIGHWAY SAFETY SPHERES (BEADS) PER ADOT 708–2.02 SHALL BE APPLIED BY HAND TO ALL CROSS MEMBERS, FRONT AND BACK AND ON BOTH COLORS, IMMEDIATELY AFTER PAINTING. THE STRIPES SHALL SLOPE DOWNWARD IN THE DIRECTION TRAFFIC IS TO PASS.

DETAIL NO.			REVISED	DETAIL NO.
130	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**BARRICADES**	01–01–2003	130

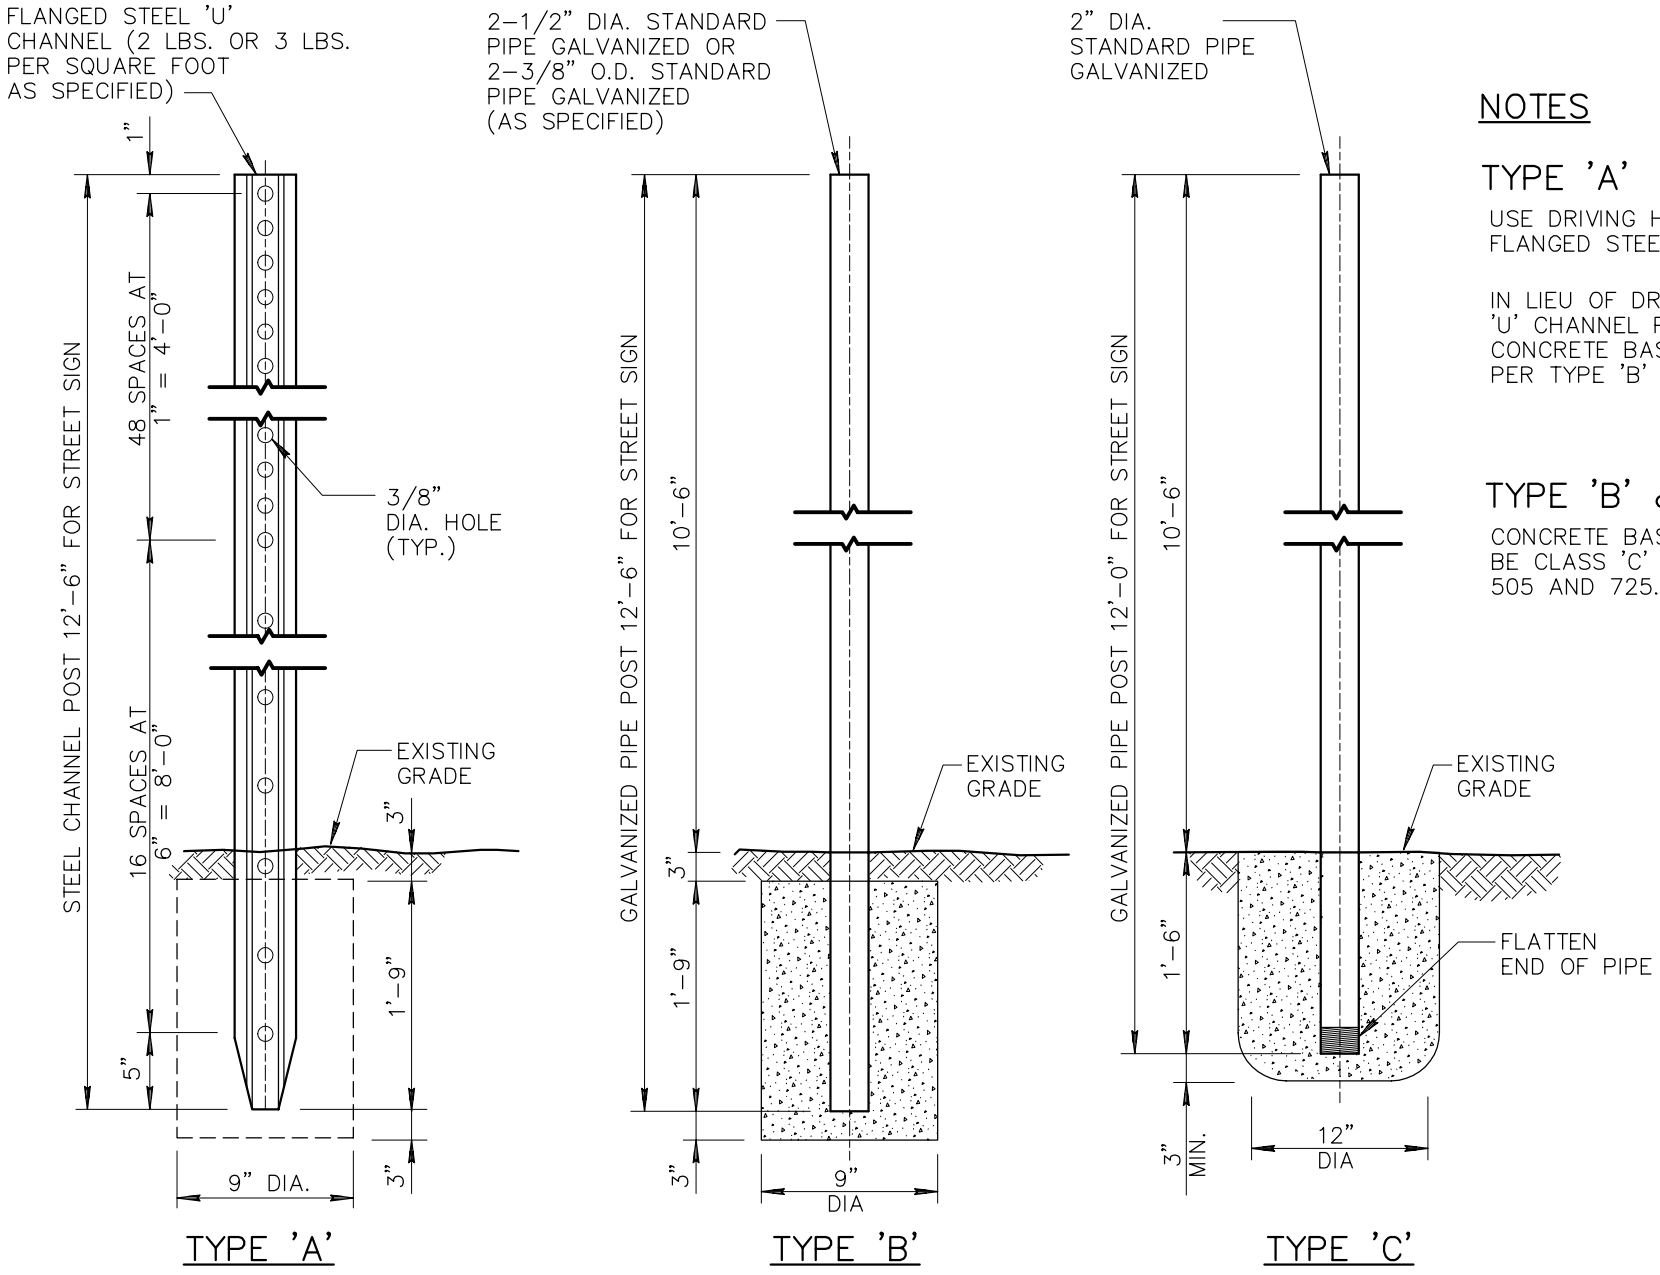

NOTES

TYPE 'A'

USE DRIVING HEAD FOR DRIVING ALL FLANGED STEEL 'U' CHANNEL POSTS.

IN LIEU OF DRIVING FLANGED STEEL 'U' CHANNEL POSTS MAY BE SET IN CONCRETE BASE FOUNDATION AS PER TYPE 'B' BASE.

TYPE 'B' & TYPE 'C'

CONCRETE BASE FOUNDATIONS SHALL BE CLASS 'C' CONCRETE AS PER SECT. 505 AND 725.

DETAIL NO.			REVISED	DETAIL NO.
131	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**STREET SIGN BASE**		131

NOTES

1. POSTS AND BLOCKS SHALL BE 8" x 8" ROUGH WOOD, PRESSURE TREATED AND UNPAINTED. HOLES SHALL BE BORED BEFORE TREATMENT. SEE SECT. 415
2. ALL GUARD RAIL PLATE, FITTINGS, HARDWARE, ETC. SHALL BE GALVANIZED.
3. TYPE 'A' GUARD RAIL INSTALLED ON NORMAL SHOULDER LINE.
4. TYPE 'B' GUARD RAIL INSTALLED ON WIDENED ROADWAY SHOULDER LINE.
5. TYPE 'B' INSTALLATION SHOWN. TYPE 'A' INSTALLATION SAME EXCEPT THAT INSIDE FACE OF GUARD RAIL SHALL FALL ON THE NORMAL SHOULDER LINE AS INDICATED BY PLAN DRAWING.
6. INSTALL LAP PLATES SO THAT EXPOSED EDGES ARE AWAY FROM APPROACHING TRAFFIC.

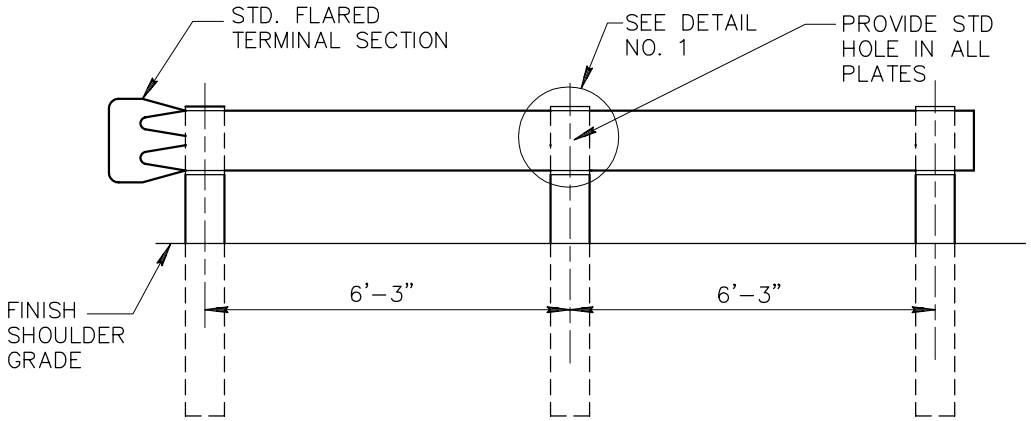

FACE ELEVATION

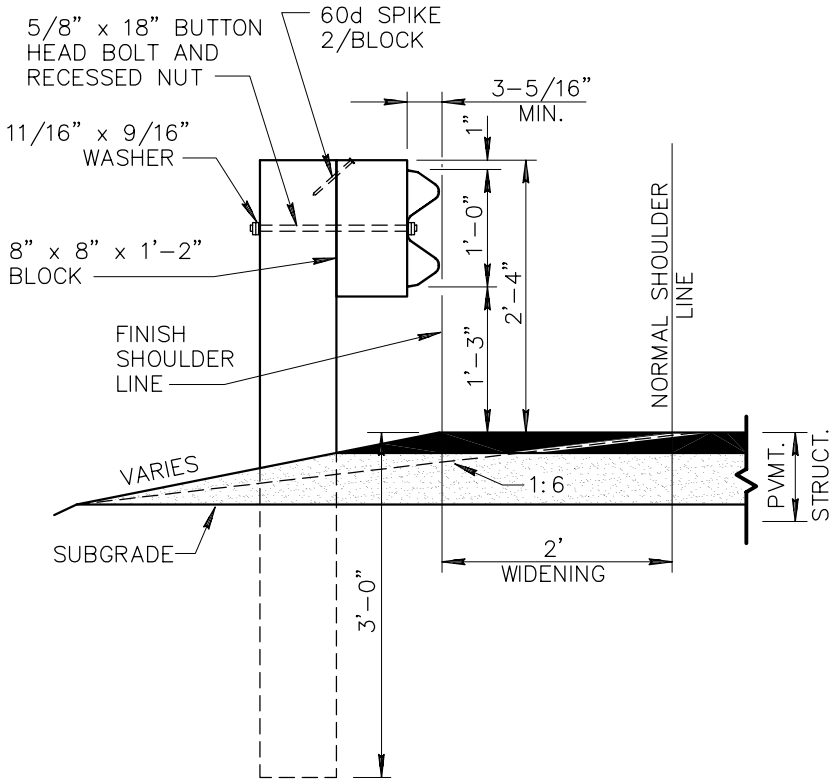

SIDE ELEVATION

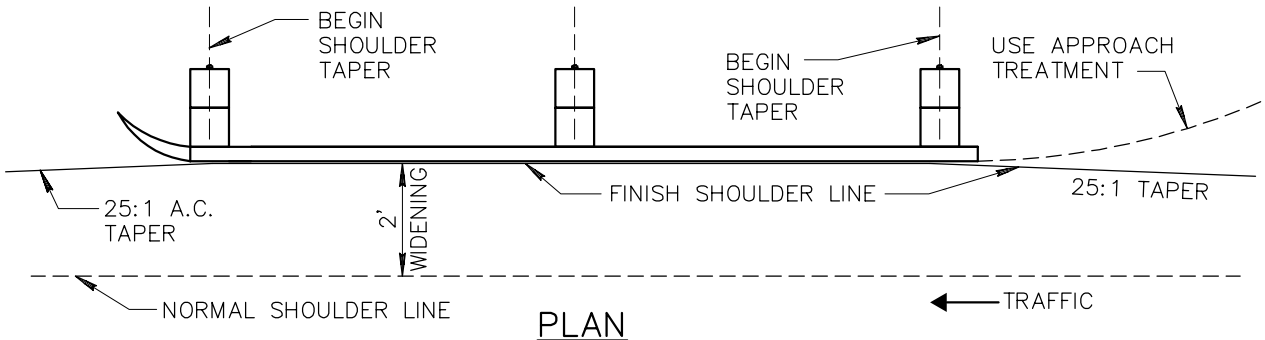

PLAN

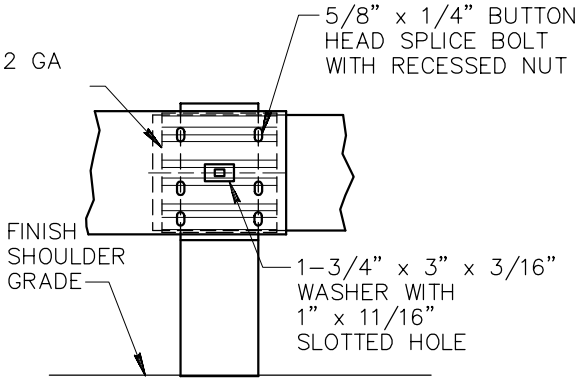

DETAIL NO. 1

DETAIL NO.			REVISED	DETAIL NO.
135-1	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**STEEL GUARD RAIL**		135-1

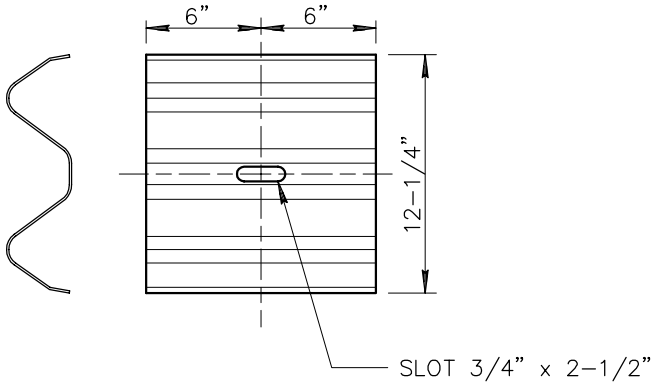

'W' SECTION BACK-UP PLATE
FOR STEEL POSTS

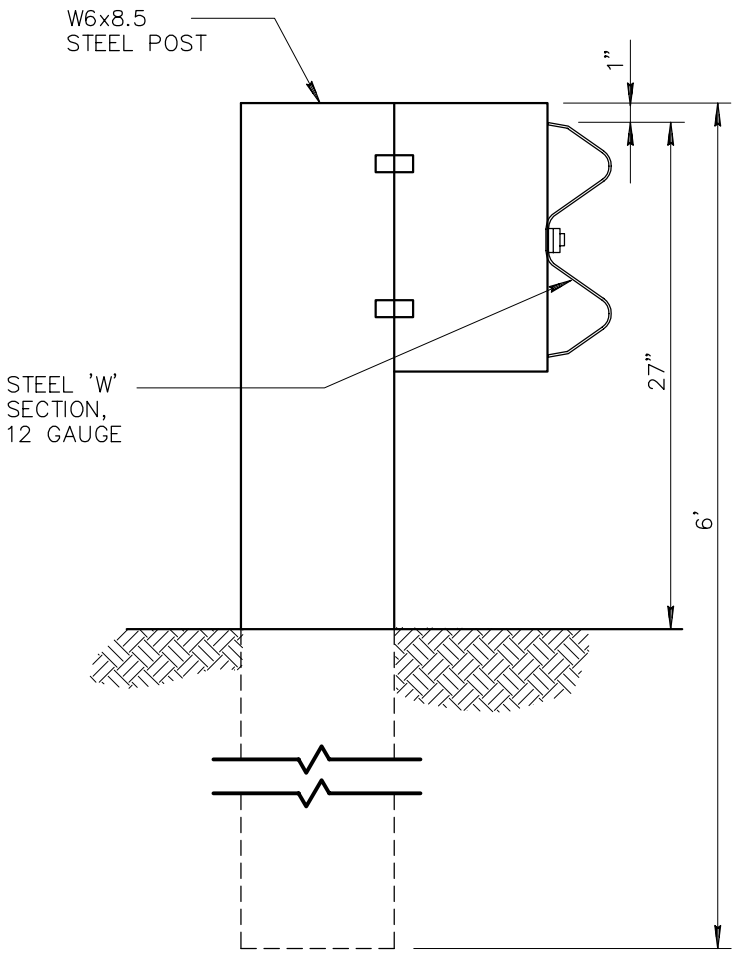

'W' BEAM (STEEL POST)

DETAIL NO.			REVISED	DETAIL NO.
135-2	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	STEEL GUARD RAIL		135-2

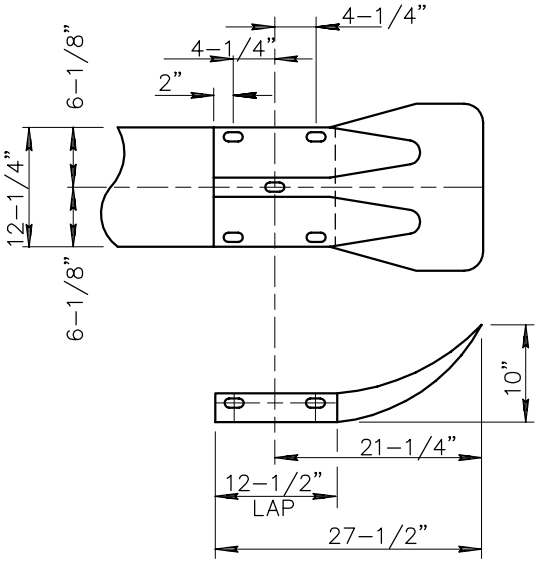

STANDARD FLARED TERMINAL SECTION

NOTES:

1. TOP AND RUB RAIL SHALL NOT PROJECT MORE THAN 1" IF ADJUSTMENT SHORTENING IS REQUIRED, THREADS SHALL BE LEFT IN FUNCTIONAL CONDITION.

2. HORIZONTAL DISTANCE BETWEEN TOP RAIL AND MEDIAN CURB SHALL NOT EXCEED 12"

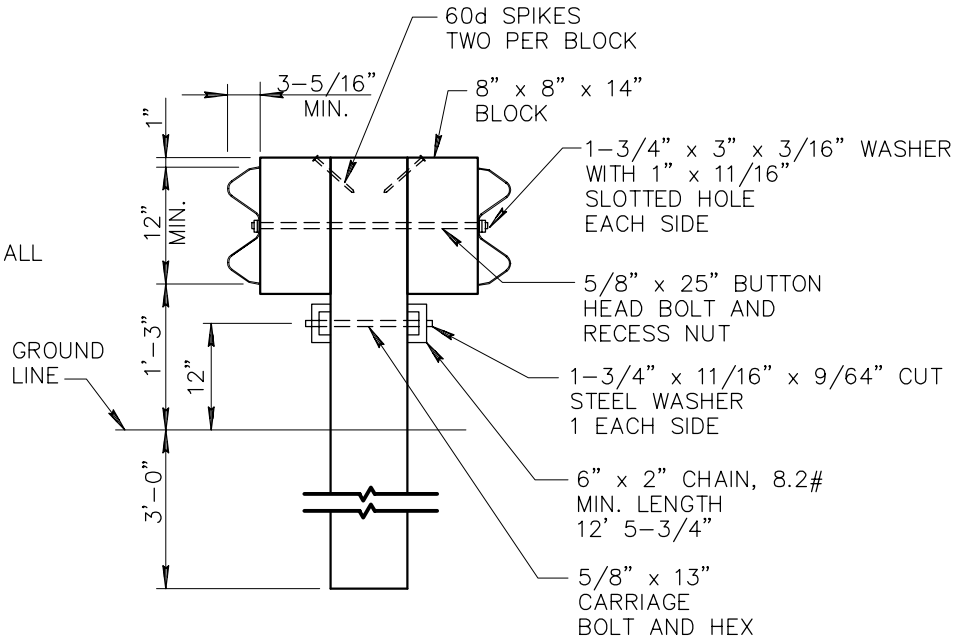

DETAIL NO. 2 – MEDIAN BARRIER

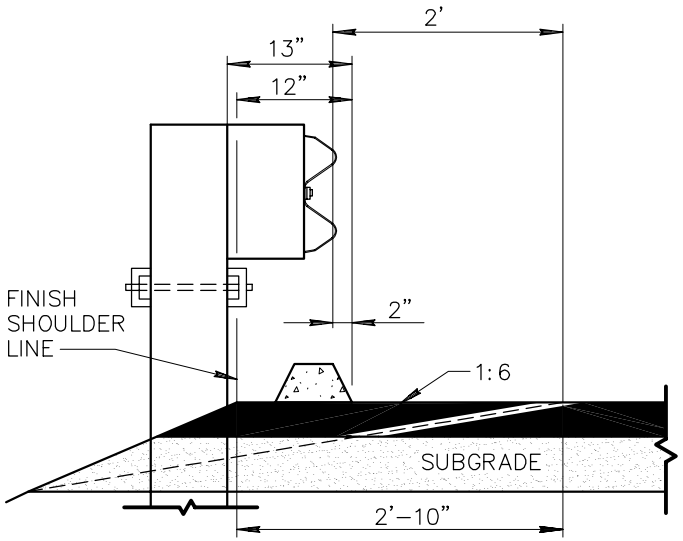

INSTALLATION OF GUARD RAIL IN EMBANKMENT CURB SECTION

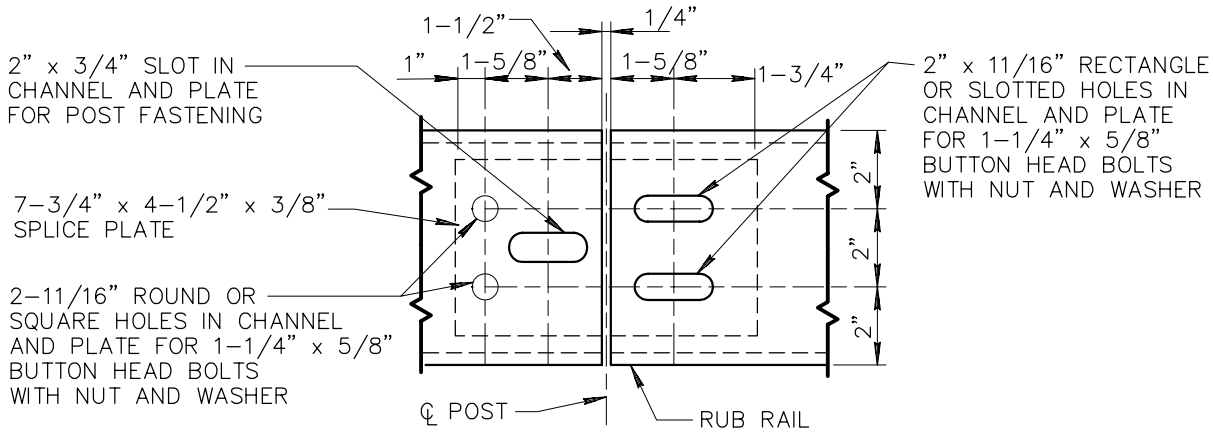

DETAIL NO. 3 – RUB RAIL SPLICE (SPLICE AT POSTS ONLY)

DETAIL NO.			REVISED	DETAIL NO.
135-3	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**STEEL GUARD RAIL**		135-3

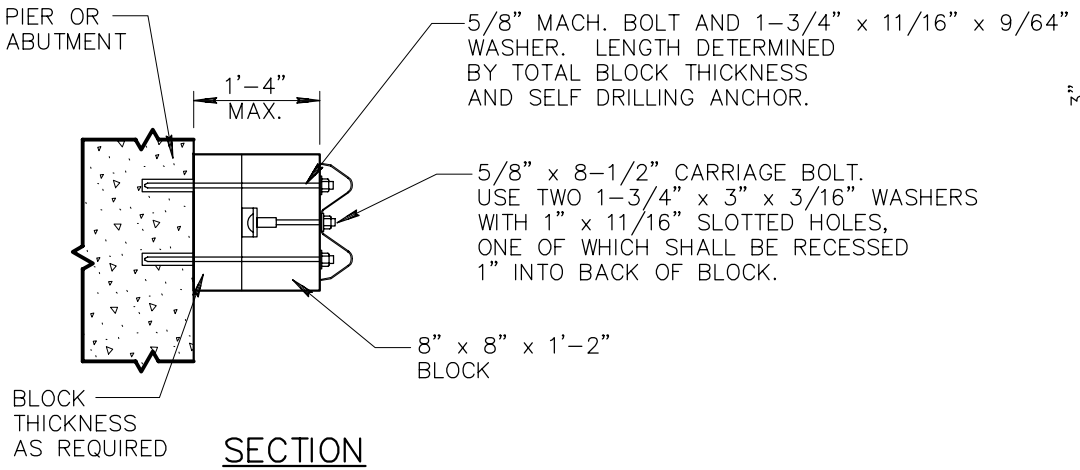

SECTION



ELEVATION

NOTE

1. 5/8" BOLT SIZE SELF DRILLING ANCHOR SHALL HAVE A MINIMUM 1500# PULL OUT STRENGTH IN 2500 P.S.I. CONCRETE IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.

DETAIL NO. 4
ATTACHMENT OF GUARD RAIL TO STRUCTURES

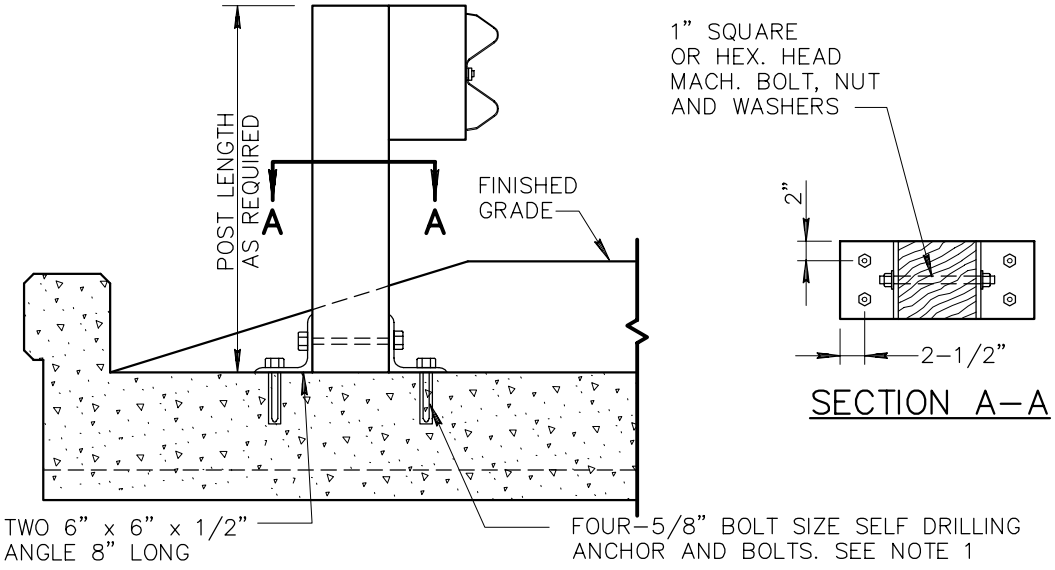

SECTION A-A

DETAIL NO. 1
GUARD RAIL POST INSTALLATION ON STRUCTURES

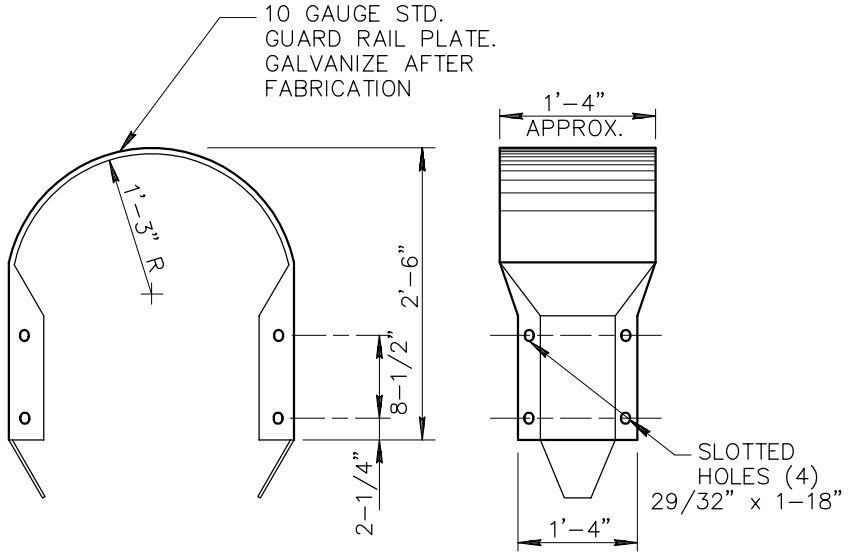

DETAIL NO. 5
BUFFER END SECTION

DETAIL NO.			REVISED	DETAIL NO.
135-4	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**STEEL GUARD RAIL**		135-4

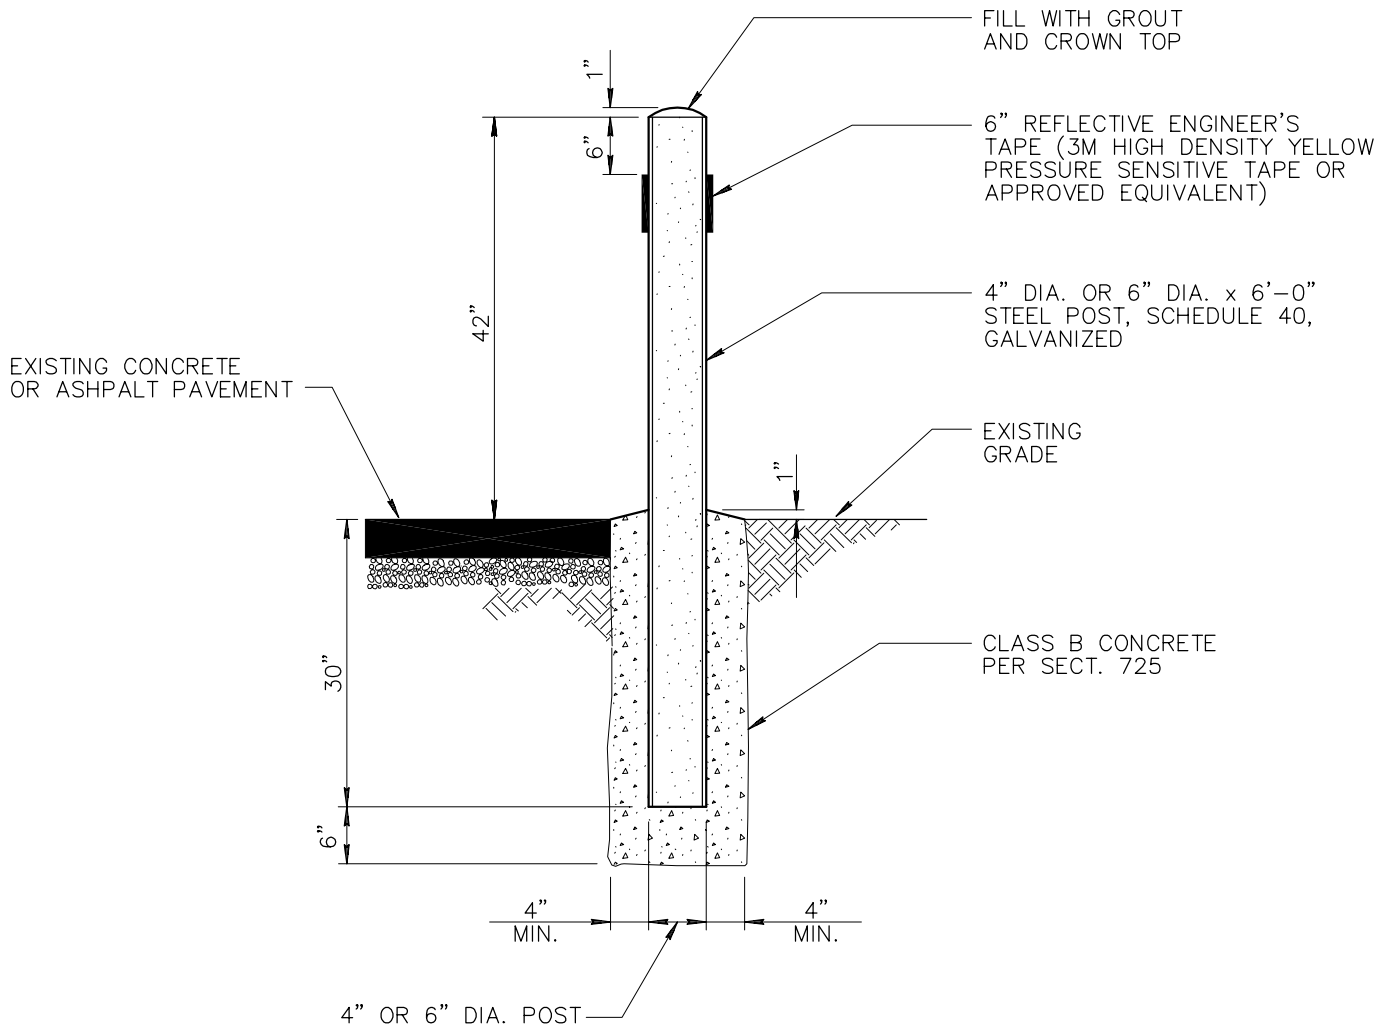

SAFETY POST SECTION

DETAIL NO.			REVISED	DETAIL NO.
140	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**SAFETY POST**		140

NOTES:

1. POSTS AND RAILS SHALL BE 1.5" SCHEDULE 40 HOT-DIPPED GALVANIZED STEEL PIPE ASTM A 53, GRADE A (2.72 #/LF, 1.9" O.D.). GALVANIZING SHALL BE IN ACCORDANCE WITH SECTION 771.
2. PAINT RAIL PER MAG SPECIFICATIONS SECTION 530 WHEN REQUIRED BY PLANS. SHOP PRIME WITH RUST INHIBITING PRIMER (FIELD REPAIR PRIMER AS NEEDED). COLOR PER PLANS.
3. VERTICAL POSTS TO BE EVENLY SPACED.
4. REMOVE ALL SHARP EDGES.
5. INSTALL SAFETY RAIL AS REQUIRED BY PLANS OR SPECIFICATIONS.
6. THE EMBEDMENT FOR ANCHOR TYPES 1, 2 AND 3 SHALL BE LOCATED INSIDE THE WALL REINFORCEMENT CAGE.

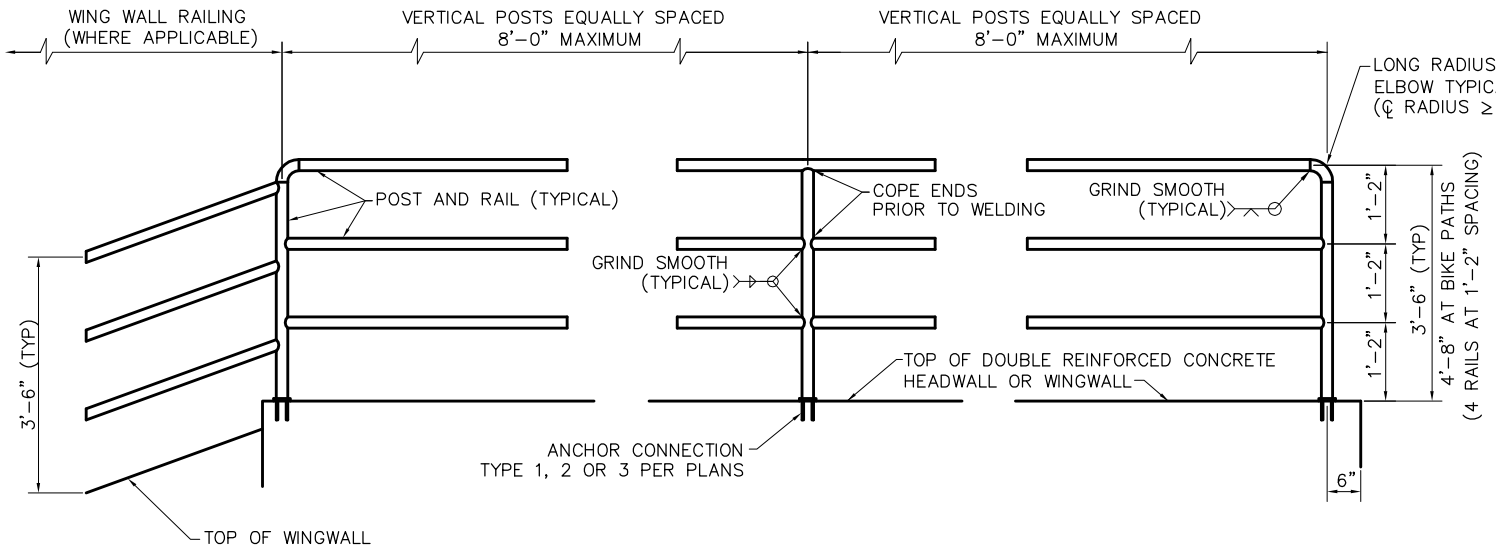

ELEVATION

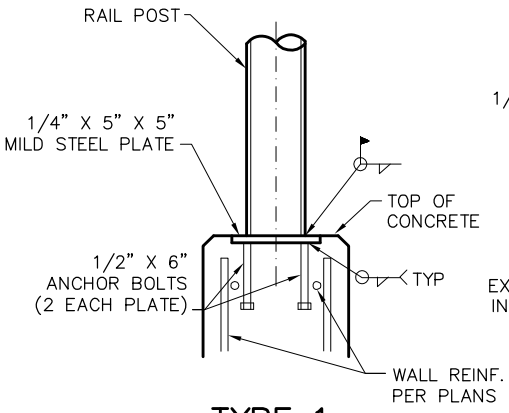

TYPE 1
ANCHOR PLATE DETAIL

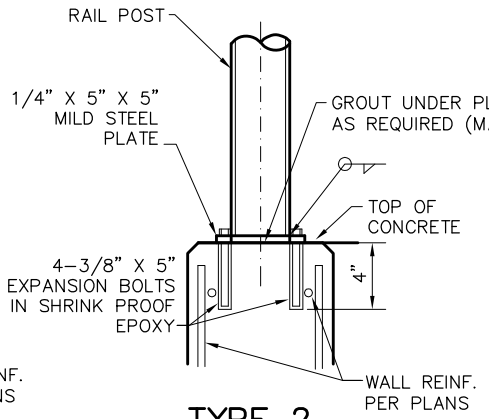

TYPE 2
EXPANSION BOLT DETAIL

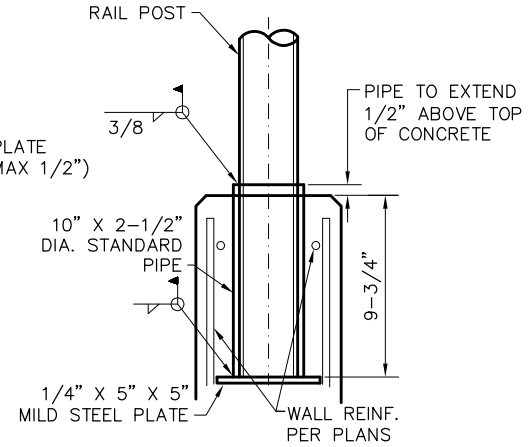

TYPE 3
PIPE SLEEVE DETAIL

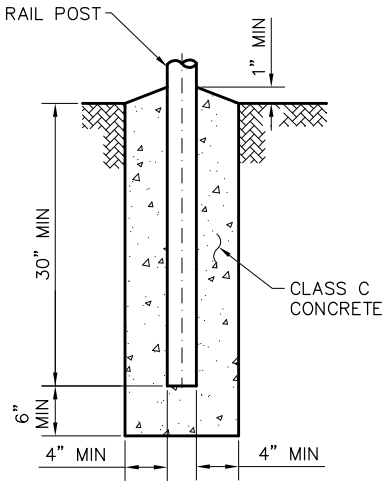

TYPE 4
GROUND INSTALLATION DETAIL

NOTE: SEE PLANS FOR ANCHORAGE DETAILS FOR ATTACHMENT TO SINGULARLY REINFORCED AND NON-REINFORCED WALLS.

DETAIL NO.			REVISED	DETAIL NO.
145	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	SAFETY RAIL	01-01-2008	145

This Page Is Reserved for Future Use.

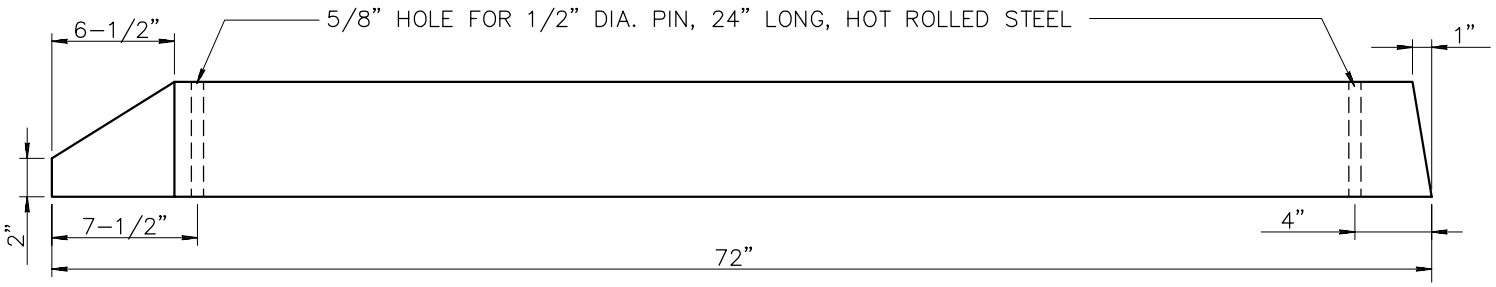

TYPE A

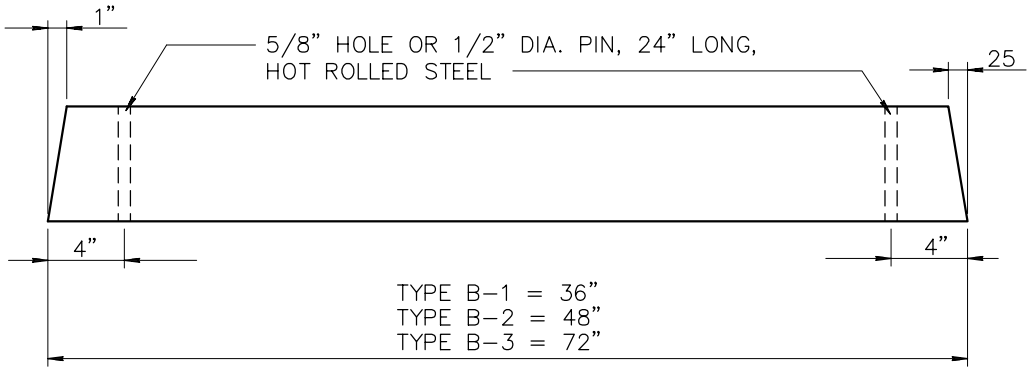

TYPE B–1, B–2, AND B–3

NOTES:

1. DIMENSIONAL AND REINFORCEMENT CHANGES WILL BE PERMITTED UPON PRIOR WRITTEN APPROVAL OF THE ENGINEER.
2. UNLESS OTHERWISE NOTED, CONCRETE SHALL BE CLASS 'A' PER SECTION 725.

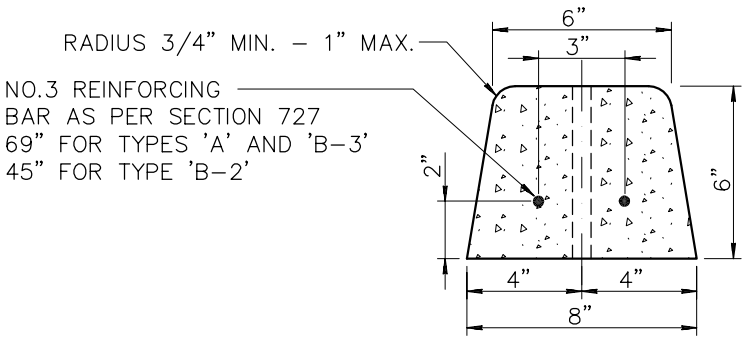

TYPICAL SECTION

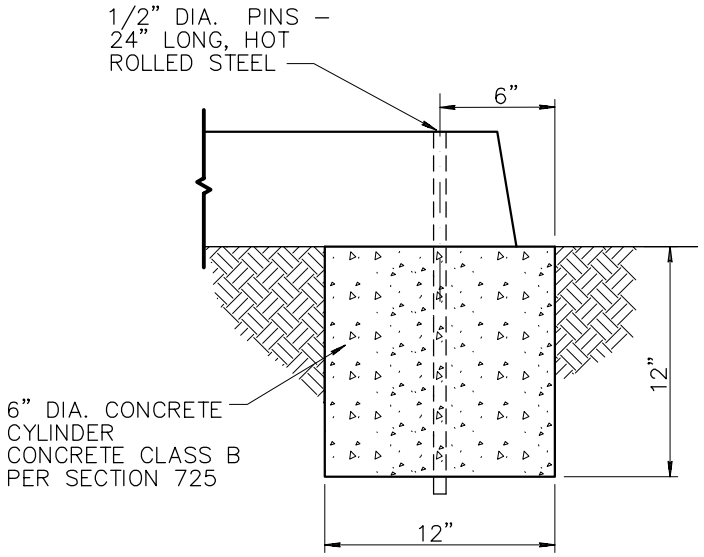

SAFETY CURB
INSTALLATION ON DIRT

DETAIL NO.			REVISED	DETAIL NO.
150	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	PRECAST SAFETY CURB		150

NOTES

1. ALL CONCRETE SHALL BE CLASS 'C' PER SECT. 725.
2. FITTINGS NOT SPECIFICALLY DETAILED SHALL BE HEAVY DUTY DESIGN.
3. STRAIN POSTS SHALL BE SPACED AT 500' MAXIMUM SPACING.
4. BOTH CORNER AND STRAIN POSTS SHALL HAVE STRAIN PANELS.
5. ALL POSTS SHALL BE CAPPED.
6. MEMBER SIZES SHALL BE THE FOLLOWING:

MEMBER	AISC SIZE	OUTSIDE DIA.
CORNER POST	2-1/2"	2.875"
LINE POST	1-1/2"	1.900"
STRAIN POST	1-1/2"	1.900"
BRACE	1-1/4"	1.666"
STRETCH BAR	3/16"x3/4" FLAT	3/16"x3/4" FLAT
GATE POST	3-1/2"	4.000"
TOP RAIL	1-1/4"	1.666"

7. CONSTRUCTION AND MATERIALS SHALL CONFORM TO SECT. 420 AND 722, RESPECTIVELY. SEE TABLE 722 FOR WEIGHTS OF MEMBERS.

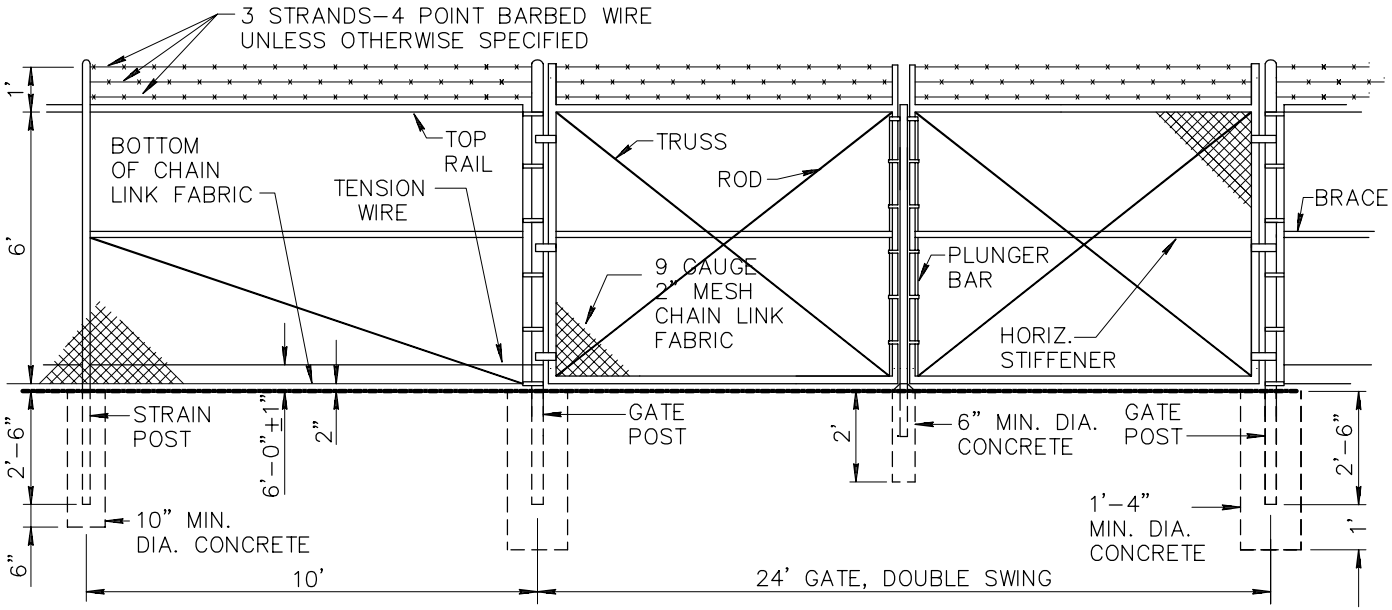

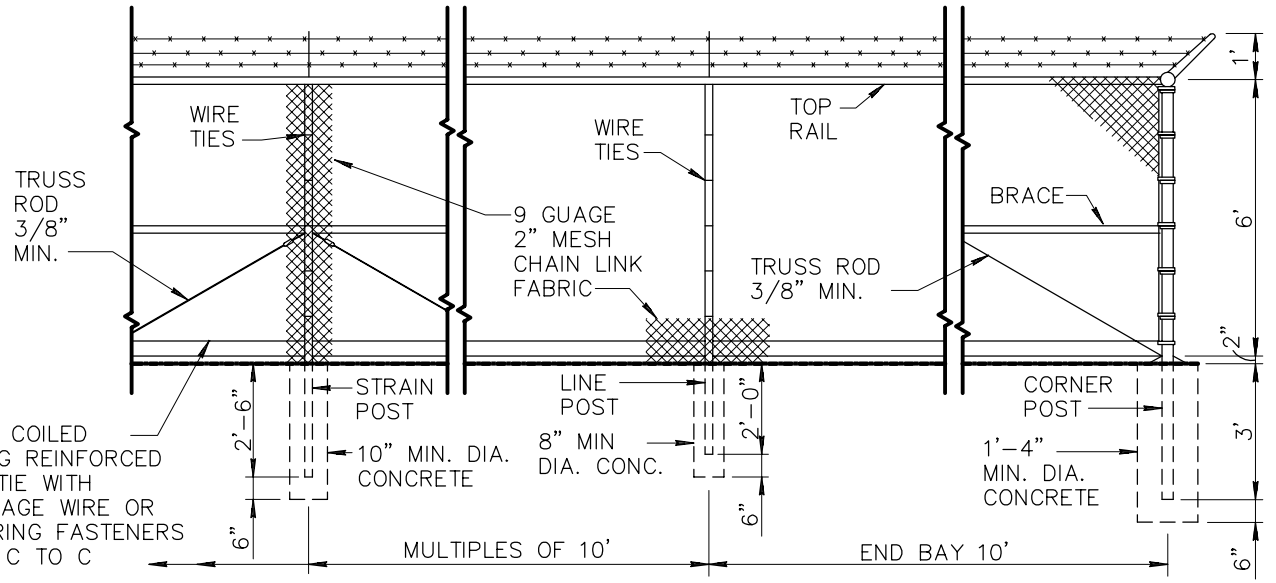

DETAIL NO.			REVISED	DETAIL NO.
160	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**6' CHAIN LINK FENCE AND GATE**	01-01-2003	160

NOTE:

L–xxx NUMBERS DESIGNATES FAA SPECIFICATION NO.

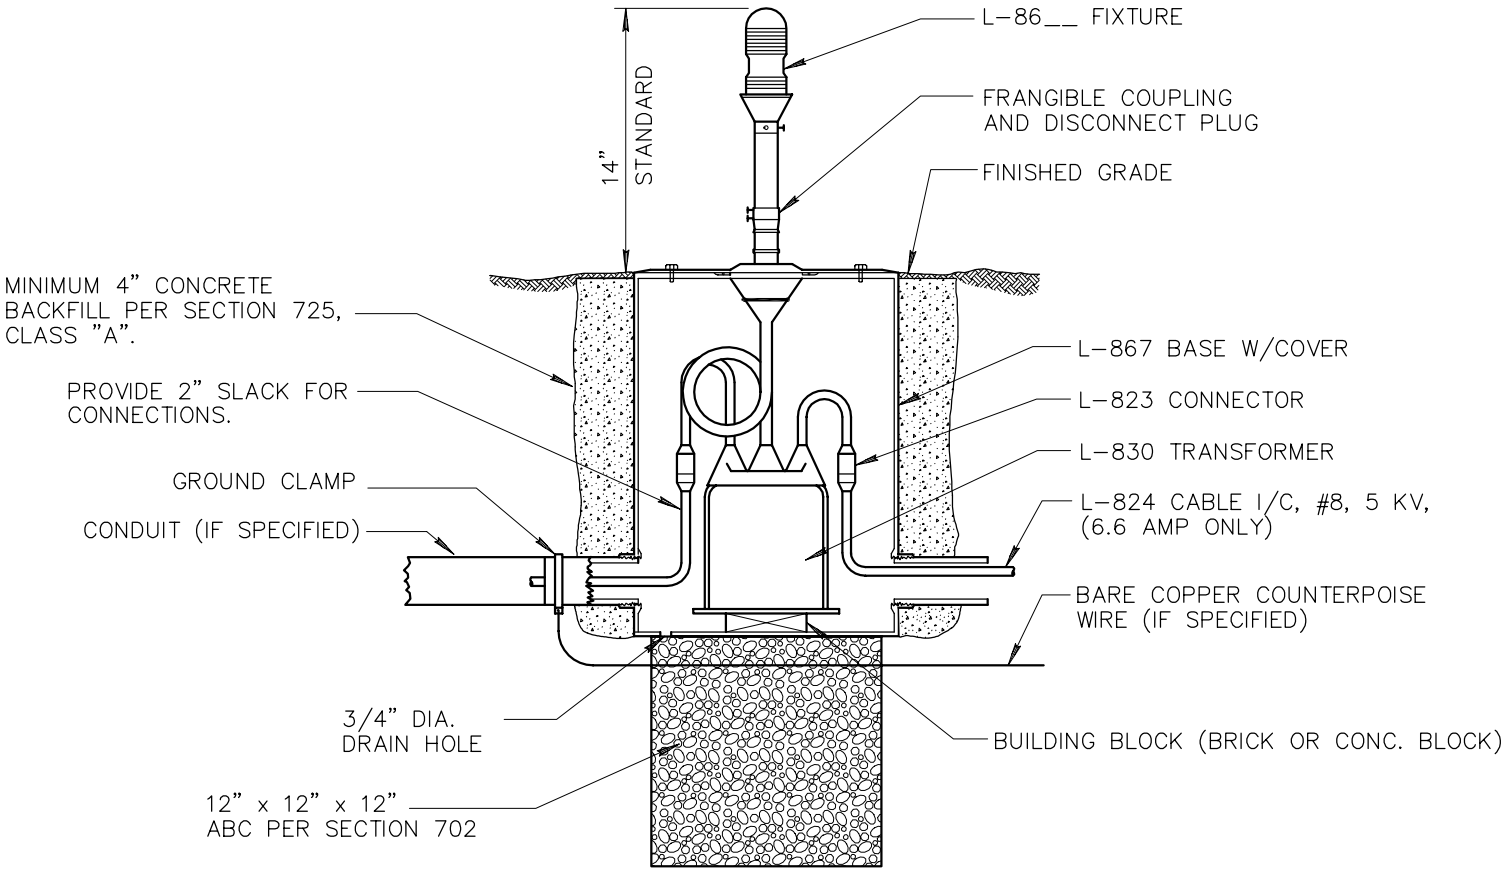

DETAIL NO.				REVISED	DETAIL NO.
170	MARICOPA ASSOCIATION of GOVERNMENTS	STANDARD DETAIL ENGLISH	TYPICAL RUNWAY OR TAXIWAY EDGE LIGHTING DETAIL		170

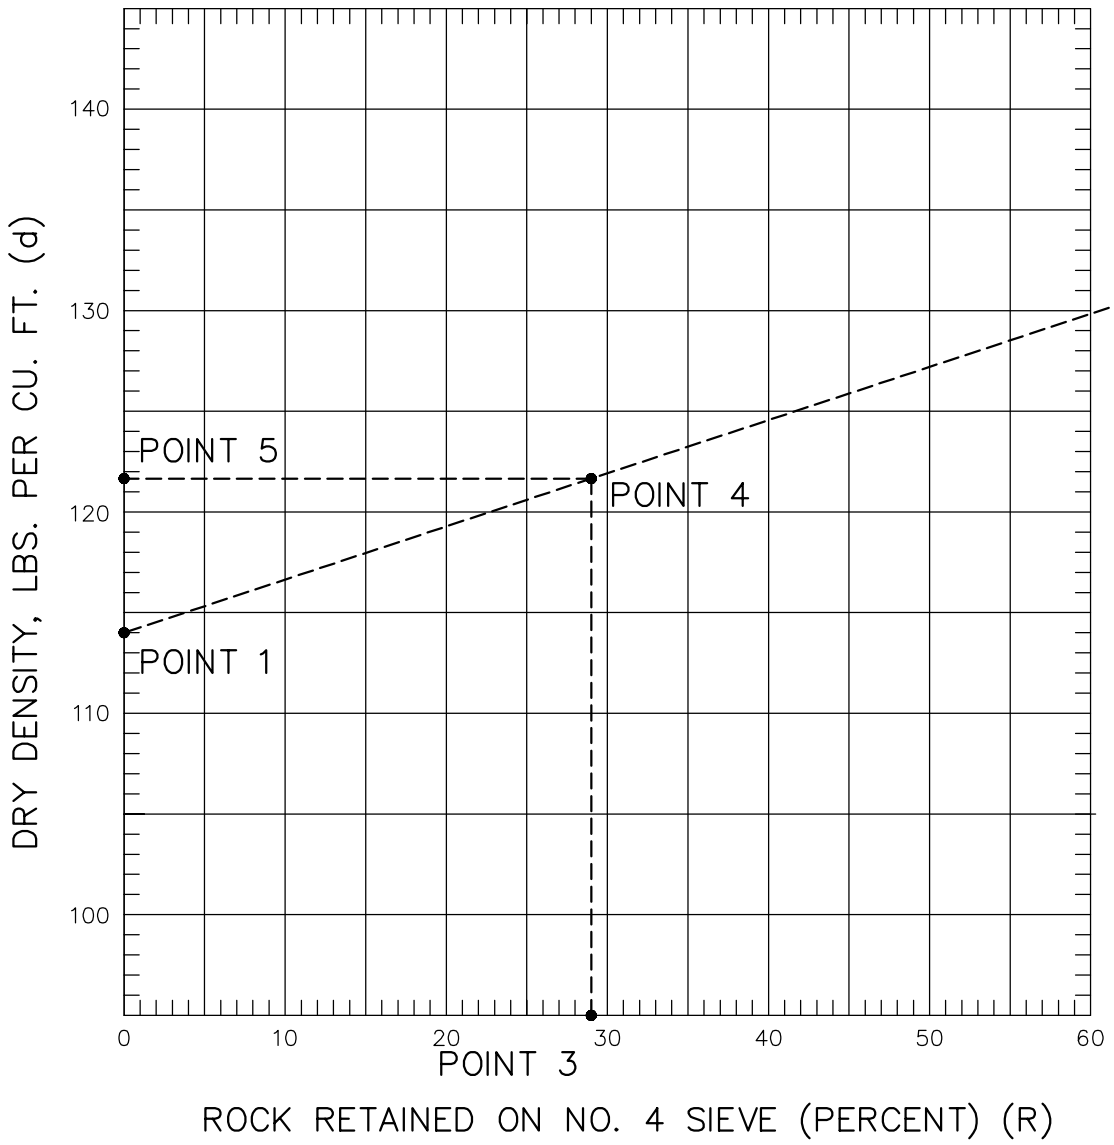

USE THE FOLLOWING FORMULA TO DETERMINE MAXIMUM DENSITY:

$$D = \frac{(100-R)d+0.9RSx62.4}{100}$$

OR USE THE GRAPH AS SHOWN BELOW:

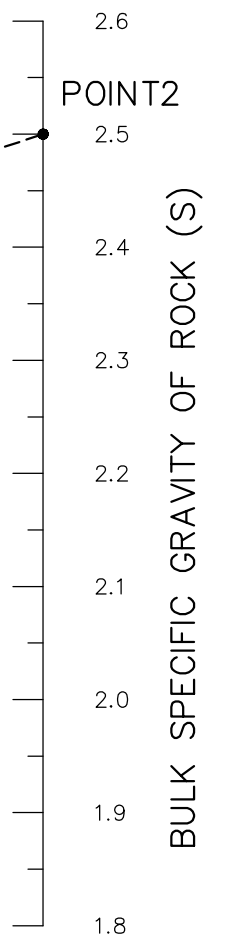

WHERE:

D = DRY DENSITY OF SAMPLE CONTAINING R PERCENT ROCK, LBS. PER CU. FT.

R = PERCENT ROCK RETAINED ON A NO. 4 SIEVE.

d = DRY DENSITY OF PORTION PASSING NO. 4 SIEVE LBS. PER CU.FT.

S = BULK SPECIFIC GRAVITY OF ROCK.

EXAMPLE:

GIVEN A MATERIAL THAT HAS A DRY DENSITY OF 114 LBS PER CU. FT, A SPECIFIC GRAVITY OF 2.5, AND GIVEN THAT ONLY 29% OF A PORTION PASSES THROUGH A NO. 4 SIEVE, WHAT IS THE DRY DENSITY OF THE SAMPLE ?

SOLUTION:

STEP 1: PLOT THE DRY DENSITY OF MATERIAL PASSING A NO. 4 SIEVE (d) ON LEFT SIDE OF GRAPH (POINT 1) (EXAMPLE: POINT 1 SHOWS d = 114 LBS. PER. CU.FT.);

STEP 2: PLOT THE BULK SPECIFIC GRAVITY OF ROCK (S) ON RIGHT MONOBAR (POINT 2) (EXAMPLE POINT 2 SHOWS S = 2.5);

STEP 3: CONNECT POINTS 1 AND 2 TO FORM LINE 1–2;

STEP 4: PLOT THE PERCENT OF ROCK RETAINED ON A NO. 4 SIEVE ON THE BOTTOM OF THE GRAPH (POINT 3); (EXAMPLE: POINT 3 SHOWS R = 29 PERCENT)

STEP 5: DRAW HORIZONTAL LINE FROM POINT 4 TO LEFT SIDE OF GRAPH (POINT 5);

STEP 6: READ POINT 5 FOR THE VALUE OF THE DRY DENSITY (D). (EXAMPLE: POINT 5 SHOWS D = 121.6 LBS. PER CU.FT.)

DETAIL NO. 190	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	ROCK CORRECTION PROCEDURE FOR MAXIMUM DENSITY DETERMINATION	REVISED	DETAIL NO. 190

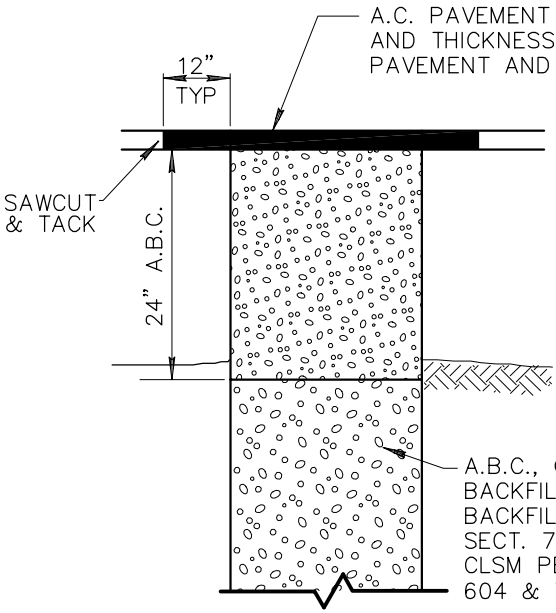

TYPE A

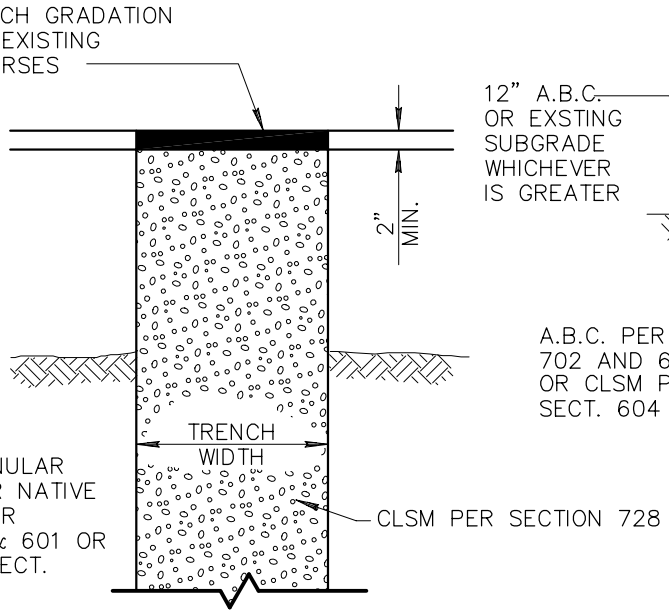

TYPE B

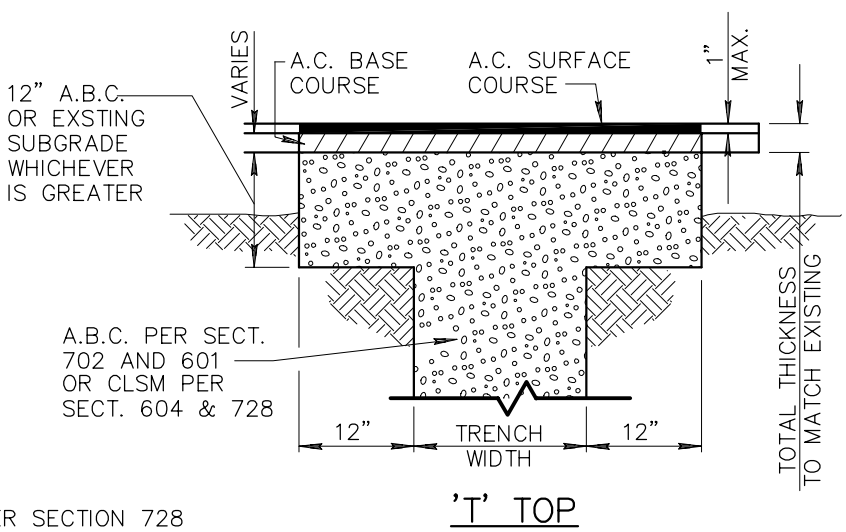

'T' TOP

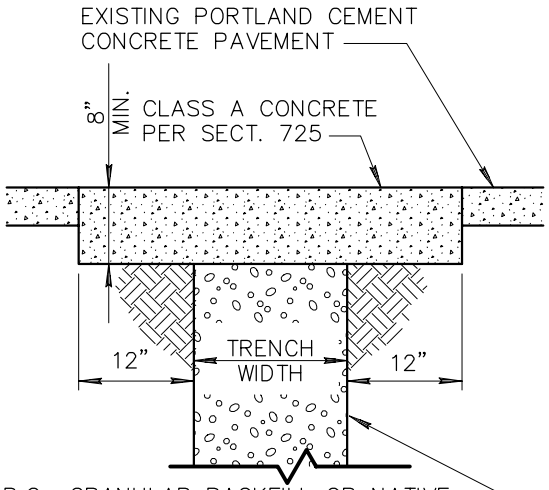

TYPE C

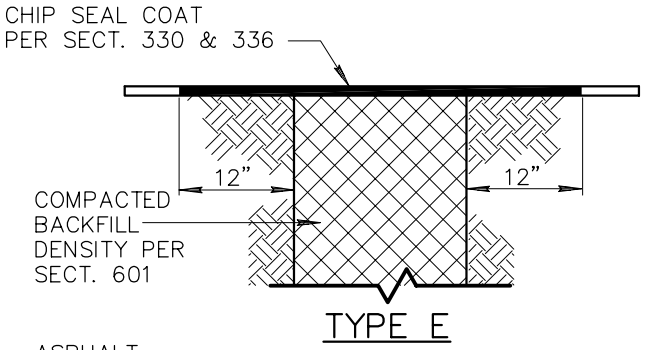

TYPE E

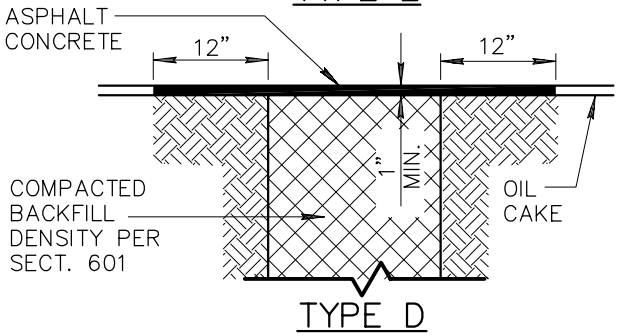

TYPE D

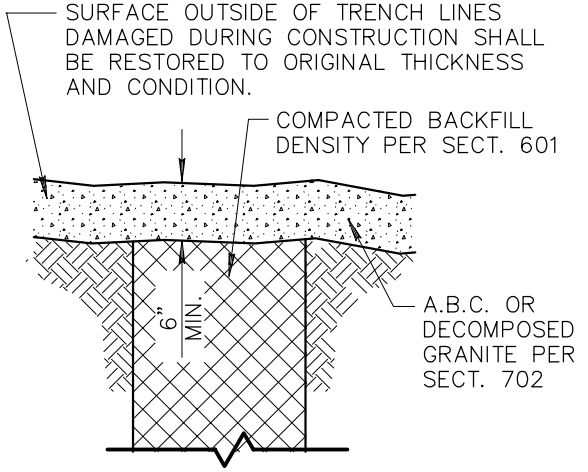

TYPE F

NOTES:

1. BEDDING PER SECTION 601.
2. ASPHALT CONCRETE SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF SECTION 321.
3. TRENCHES IN ASPHALT PAVEMENTS LESS THAN 18" WIDE SHALL BE BACKFILLED WITH CLSM OR ABC SLURRY (NO CEMENT) AS SPECIFIED BY THE SPECIAL PROVISIONS, PLANS OR ENGINEER
4. TYPES 'D' AND 'E' REQUIRE 9" OF A.B.C. AT TOP OF TRENCH WHEN THERE IS AN EXISTING BASE.
5. THE TYPE OF CLSM SHALL BE 1/2 SACK OR 1 SACK AS SPECIFIED BY THE SPECIAL PROVISIONS, PLANS OR ENGINEER

DETAIL NO.		STANDARD DETAIL	BACKFILL, PAVEMENT AND SURFACE REPLACEMENT	REVISED	DETAIL NO.
200	MARICOPA ASSOCIATION of GOVERNMENTS	ENGLISH		01-03-2002	200

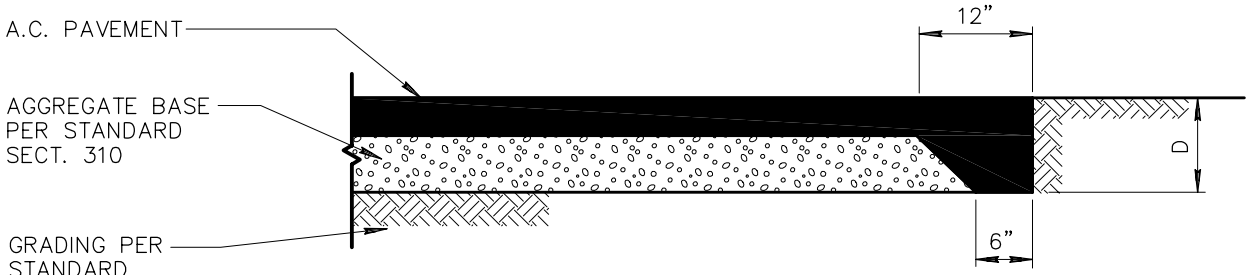

D = DESIGN THICKNESS OF A.C. PAVEMENT PLUS AGGREGATE BASE.

TYPE 'A'

TYPE 'B'

DETAIL NO.				REVISED	DETAIL NO.
201	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	PAVEMENT SECTION AT TERMINATION		01–01–2008	201

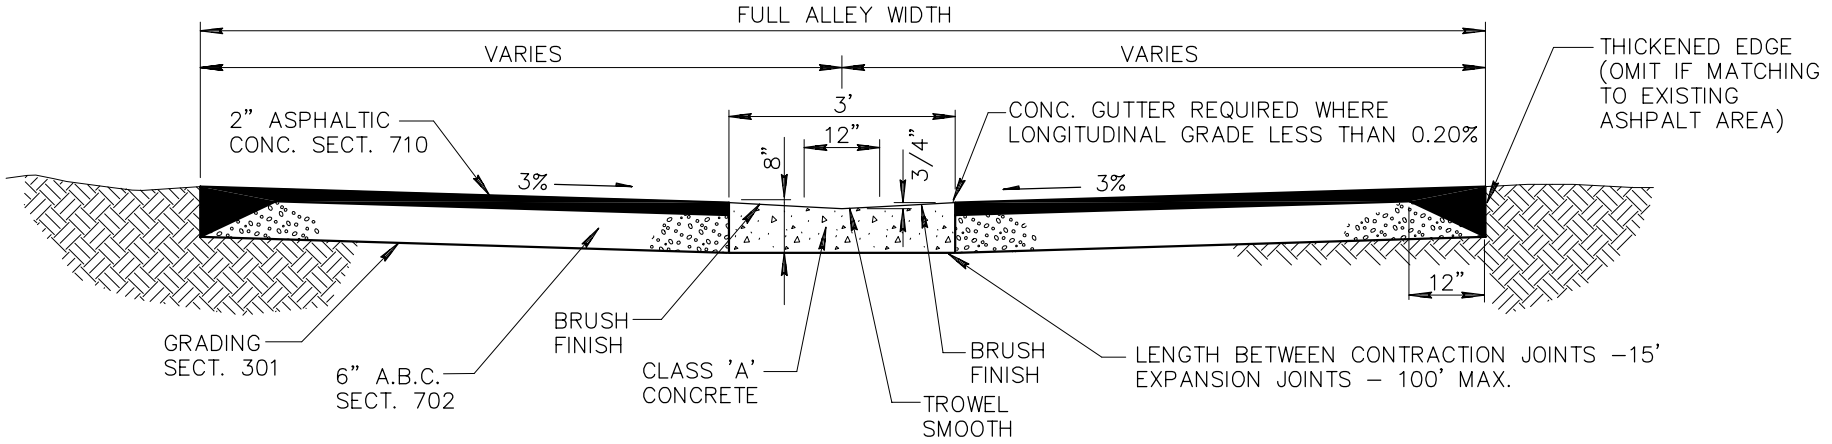

PAVED ALLEY DETAIL

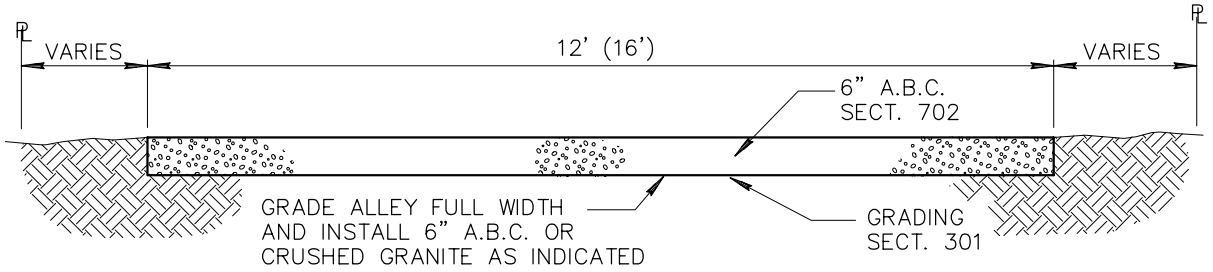

UNPAVED ALLEY DETAIL

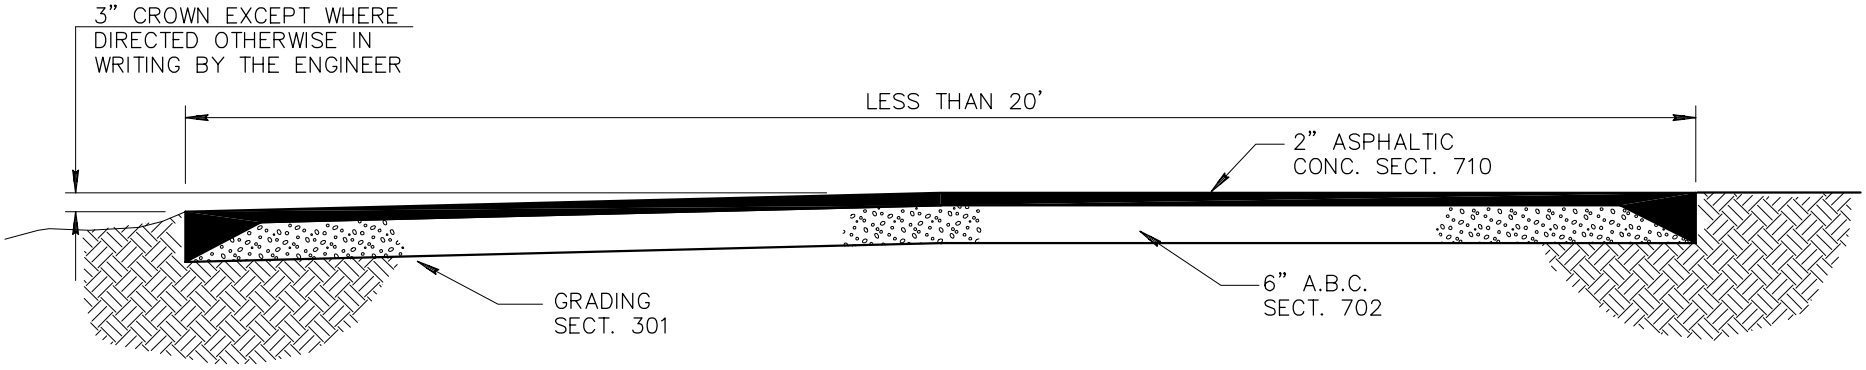

RESIDENTIAL ALLEY DETAIL

DETAIL NO.			REVISED	DETAIL NO.
202	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**ALLEY DETAILS (PAVED AND UNPAVED)**		202

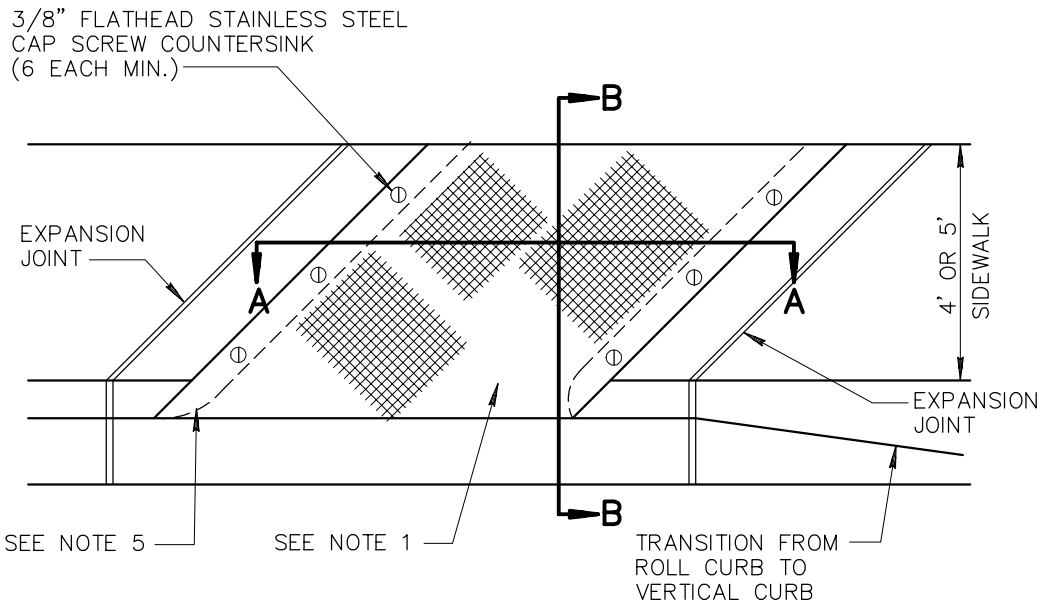

NOTES:

1. ANGLE EQUALS 45° UNLESS SPECIFIED ON PLAN.
2. DIMENSION 'B' EQUALS 'A' + 2'
3. (——►) INDICATES DIRECTION OF FLOW.
4. PAINT STEEL ACCORDING TO SECTION 790. PAINT NUMBER 1–A OR 1–B.
5. R EQUALS 1" UNLESS OTHERWISE DIRECTED.
6. H EQUALS CURB FACE HEIGHT.
7. FOR ROLL CURB AND GUTTER, USE 2' TRANSITIONS TO VERTICAL CURB.
8. CONCRETE SHALL BE CLASS B PER SECT. 725 AND INSTALLED PER SECT. 505.

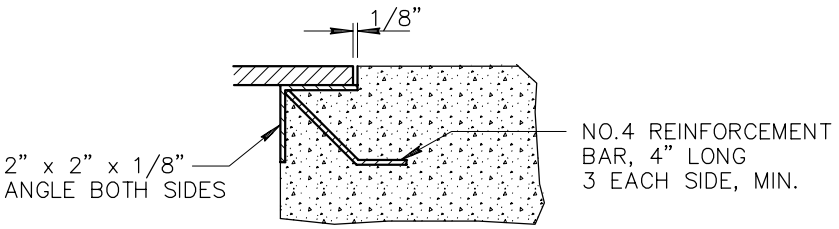

DETAIL C

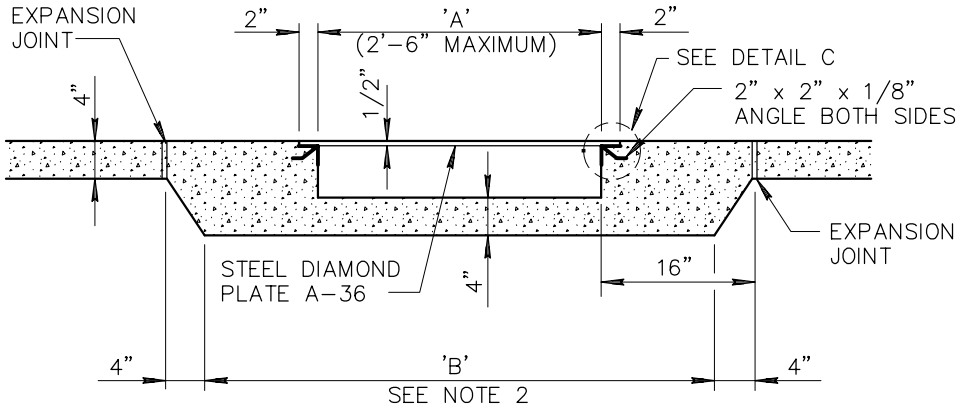

SECTION 'A–A'

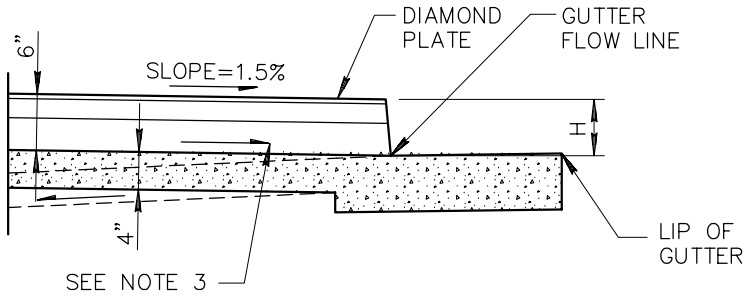

SECTION 'B–B'

DETAIL NO.			REVISED	DETAIL NO.
203	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	SCUPPERS		203

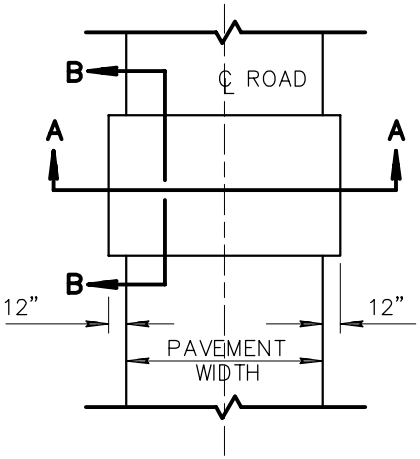

PLAN OF CONCRETE
EQUIPMENT CROSSING

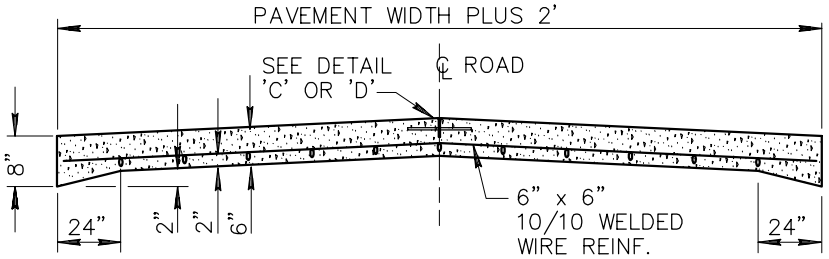

SECTION A–A

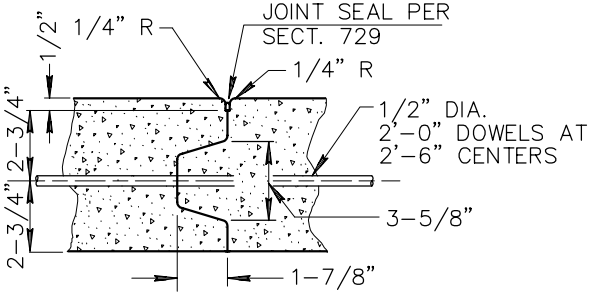

LONGITUDINAL JOINT
DETAIL 'C'

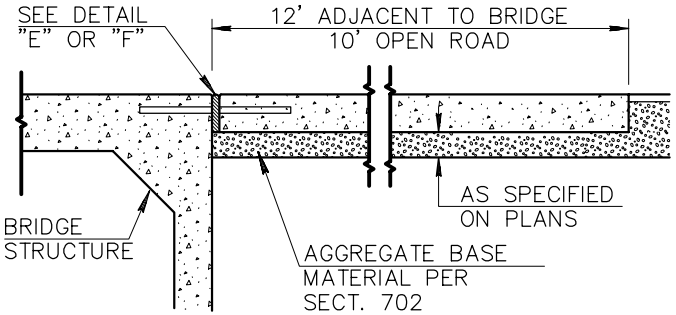

SECTION B–B

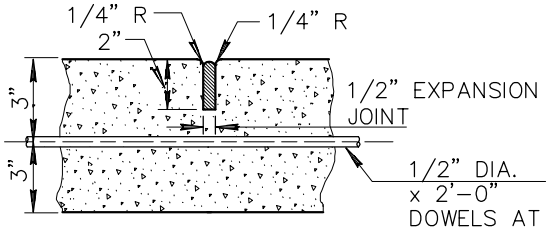

LONGITUDINAL JOINT
DETAIL 'D'

NOTES:

1. WHEN EQUIPMENT CROSSING LIES ADJACENT TO BRIDGE OR BOX CULVERT, CONSTRUCT THE EQUIPMENT CROSSING TO WIDTH OF BRIDGE ROADWAY.
2. ALL DOWELS IN CENTER JOINTS SHALL BE DEFORMED BARS AND SHALL HAVE UNBROKEN BOND. THEY SHALL BE HELD SECURELY IN PLACE, PARALLEL TO THE SUBGRADE AND PERPENDICULAR TO THE CENTER LINE OF THE ROAD.
3. THE EDGING TOOL USED FOR ALL LONGITUDINAL JOINTS SHALL BE SO CONSTRUCTED AS TO PROVIDE A SMOOTH TROWELED SURFACE 3" WIDE ON EACH SIDE OF THE JOINT.
4. IF APPROVED BY THE ENGINEER, OTHER DEFORMATIONS MAY BE USED IN LONGITUDINAL JOINT – DETAIL 'C'.
5. DETAIL 'C' TO BE USED ONLY WHEN FULL WIDTH CAN NOT BE POURED IN ONE POUR. USE DETAIL 'D' IF FULL WIDTH IS POURED IN ONE POUR.

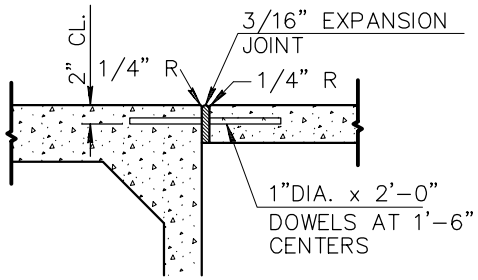

JOINT AT NEW BRIDGE
DETAIL 'F'

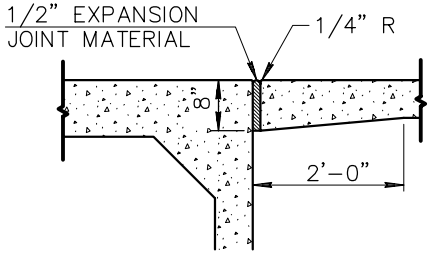

JOINT AT EXISTING BRIDGE
DETAIL 'E'

DETAIL NO.			REVISED	DETAIL NO.
204	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**EQUIPMENT CROSSING**		204

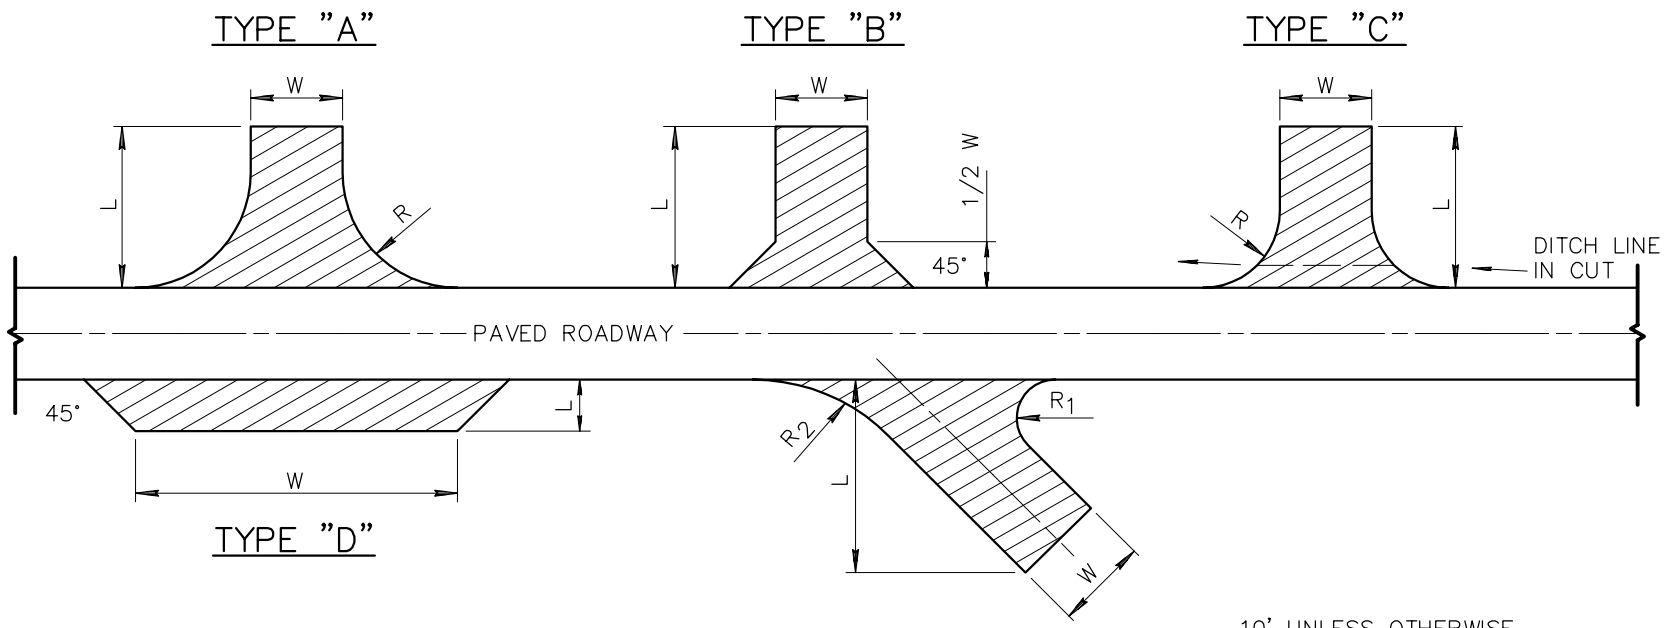

NOTES:

1. W – INDICATES WIDTH OF PAVED SURFACE OF TURNOUT.
   L – INDICATES LENGTH OF PAVED SURFACE OF TURNOUT.
   R – RADIUS.

2. SIZE AND TYPE OF TURNOUT SHALL BE NOTED ON PLANS AS FOLLOWS:
   90° – NO RADIUS: WxL–SURFACE–TYPE; (12' x 30'–A.C.–TYPE "B" TURNOUT).
   90° – WITH A RADIUS: WxLxR–SURFACE–TYPE; (12' x 20' x 15'–A.C.–TYPE "C" TURNOUT). OTHER THAN 90° WITH 2 RADII–TYPE "S": WxLxR_1 xR_2–SURFACE–TYPE; (12' x 20' x 15'–A.C.–TYPE "S" TURNOUT).
   OR IT MAY BE NOTED ON PLANS IN CONVENTIONAL TERMS.

3. TURNOUTS TO BE STRAIGHT TYPE UNLESS OTHERWISE NOTED ON PLANS.

4. A.C. AND BASE MATERIAL THICKNESS FOR TURNOUTS SHALL BE THE SAME AS SHOWN ON THE ROADWAY SECTION, UNLESS OTHERWISE NOTED.

5. ANY EXCAVATION OR EMBANKMENT FOR TURNOUTS IS INCLUDED IN THE ROADWAY QUANTITIES.

6. TURNOUTS ARE TO BE PLACED WHERE SHOWN ON PLANS, OR AS DIRECTED BY THE ENGINEER.

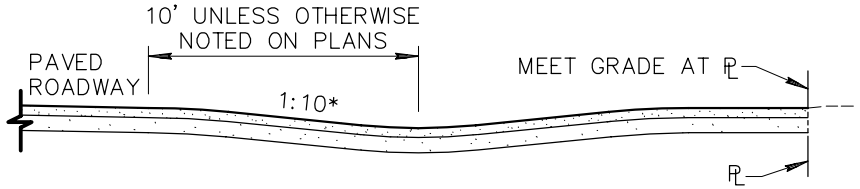

TYPICAL VALLEY GUTTER TURNOUT

TYPICAL STRAIGHT TURNOUT

* UNLESS OTHERWISE NOTED ON PLANS

DETAIL NO.			REVISED	DETAIL NO.
205	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	PAVED TURNOUTS	01–01–2006	205

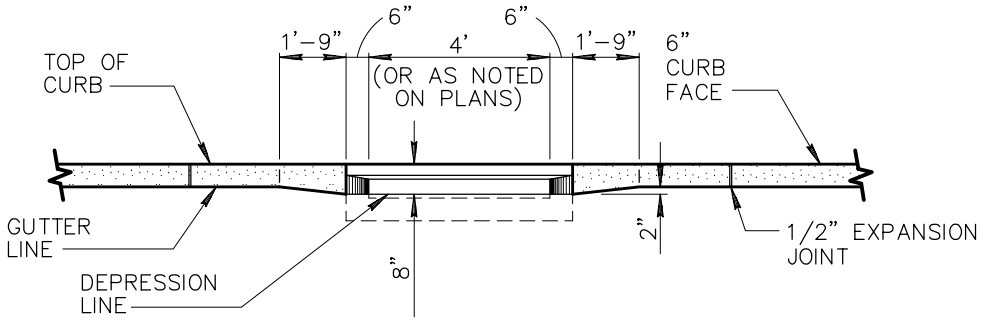

SECTION A–A

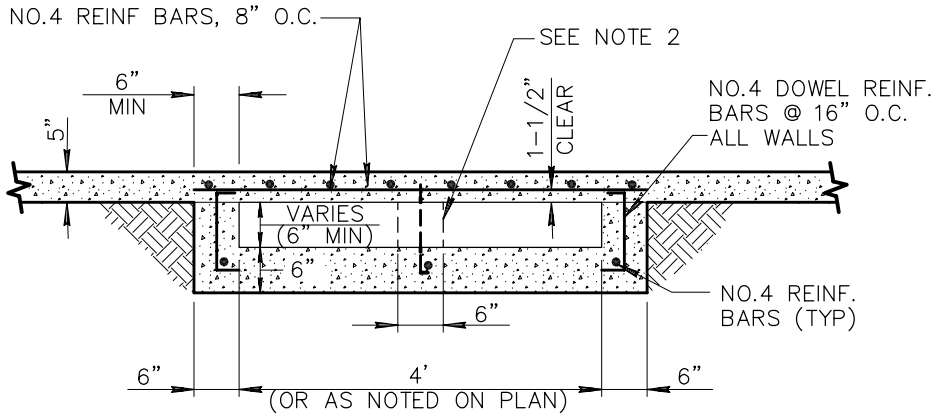

SECTION B–B

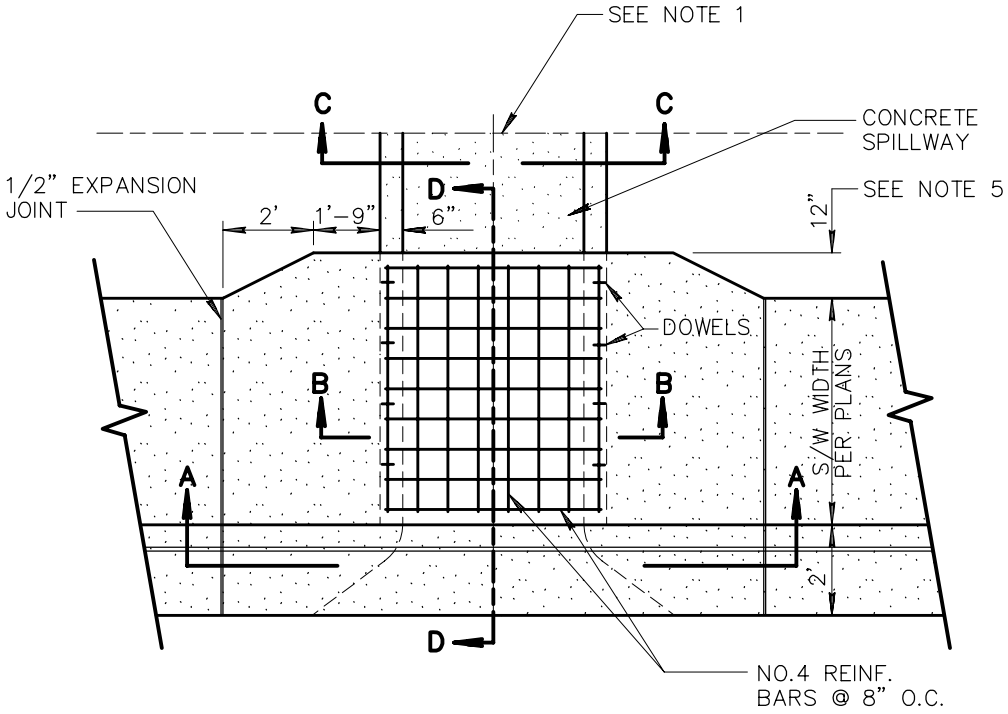

SCUPPER PLAN VIEW

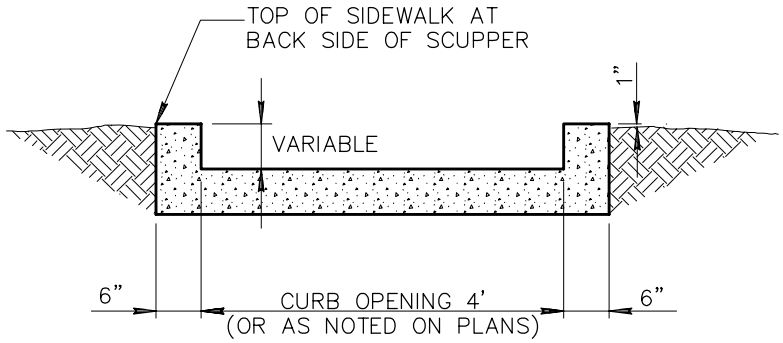

SECTION C–C SPILLWAY

NOTES:

1. TRANSITION TO SPILLWAY/CHANNEL AS PER APPROVED PLANS.
2. A CENTER WALL SHALL BE INSTALLED IN SCUPPERS WIDER THAN 4' OR IF MORE THAN 1 SCUPPER IS BUILT IN SERIES.
3. EXPANSION JOINT FILLER SHALL BE 1/2" BITUMINOUS TYPE PREFORMED EXPANSION JOINT FILLER, ASTM D–1751.
4. CONCRETE FOR THE SCUPPER SHALL BE CLASS 'A' PER SECTION 725. CONCRETE FOR THE SPILLWAY SHALL BE CLASS 'A' OR CLASS 'B'.
5. 12" OFFSET DISTANCE SHALL BE INCREASED TO 2'–6" FOR DESIGNATED BICYCLE PATHS.

DETAIL NO.			REVISED	DETAIL NO.
206–1	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	CONCRETE SCUPPER	01–01–2007	206–1

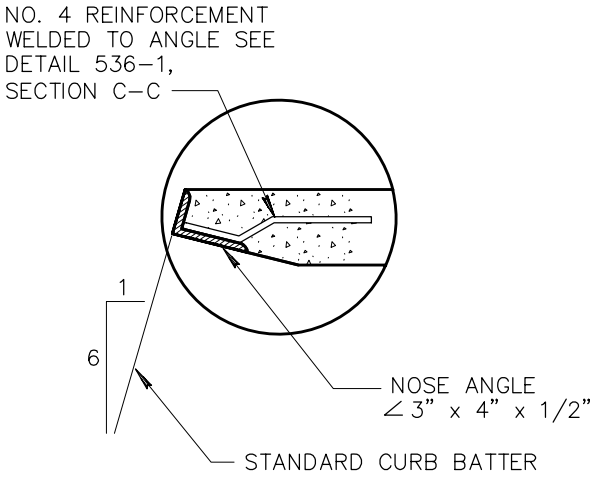

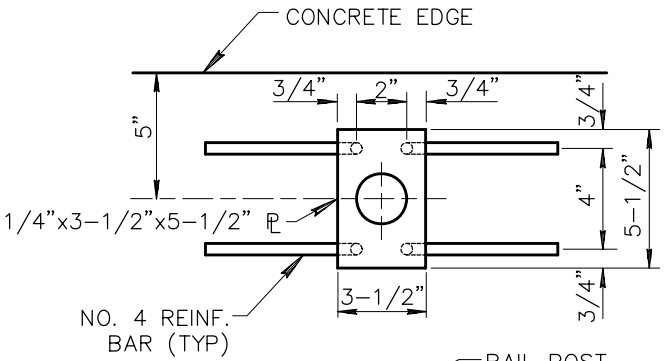

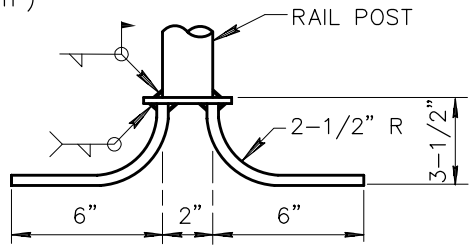

WELD PLATE

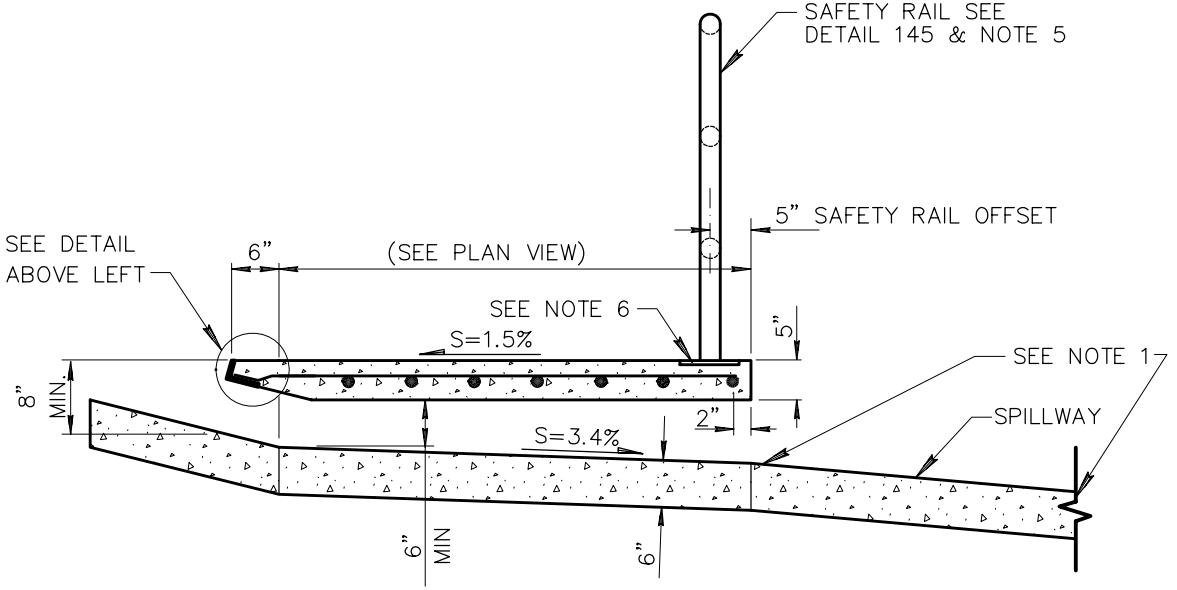

SECTION D-D

NOTES:

1. TRANSITION TO SPILLWAY/CHANNEL AS PER APPROVED PLANS.
2. A CENTER WALL SHALL BE INSTALLED IN SCUPPERS WIDER THAN 4' OR IF MORE THAN 1 SCUPPER IS BUILT IN SERIES.
3. EXPANSION JOINT FILLER SHALL BE 1/2" BITUMINOUS TYPE PREFORMED EXPANSION JOINT FILLER, ASTM D-1751.
4. CONCRETE FOR THE SCUPPER SHALL BE CLASS 'A' PER SECTION 725. CONCRETE FOR THE SPILLWAY SHALL BE CLASS 'A' OR CLASS 'B'.
5. SAFETY RAIL SHALL BE CONTINUOUS BETWEEN THE SPILLWAY EXTERIOR WALLS.
6. USE WELD PLATES FOR SAFETY RAIL ANCHORS LOCATED IN THE 5" THICK CONCRETE.

DETAIL NO.			REVISED	DETAIL NO.
206-2	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CONCRETE SCUPPER	01-01-2007	206-2

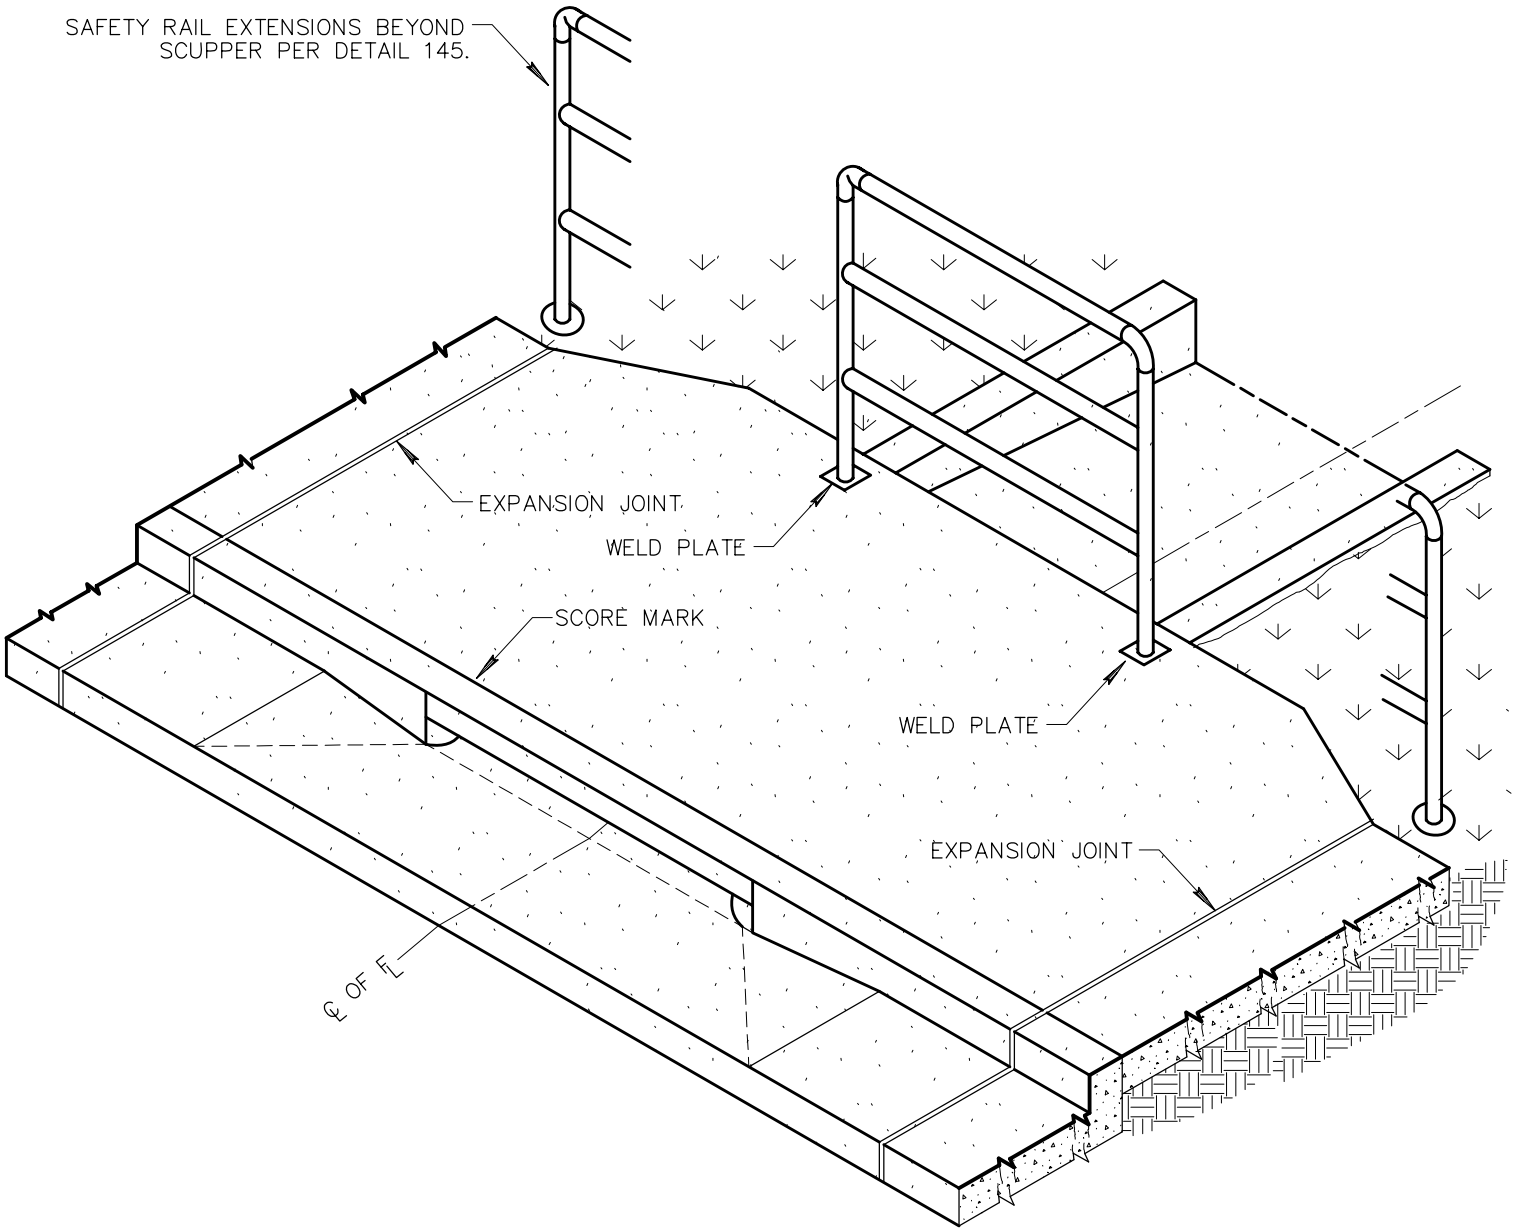

DETAIL NO.				REVISED	DETAIL NO.
206–3	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CONCRETE SCUPPER		01–01–2007	206–3

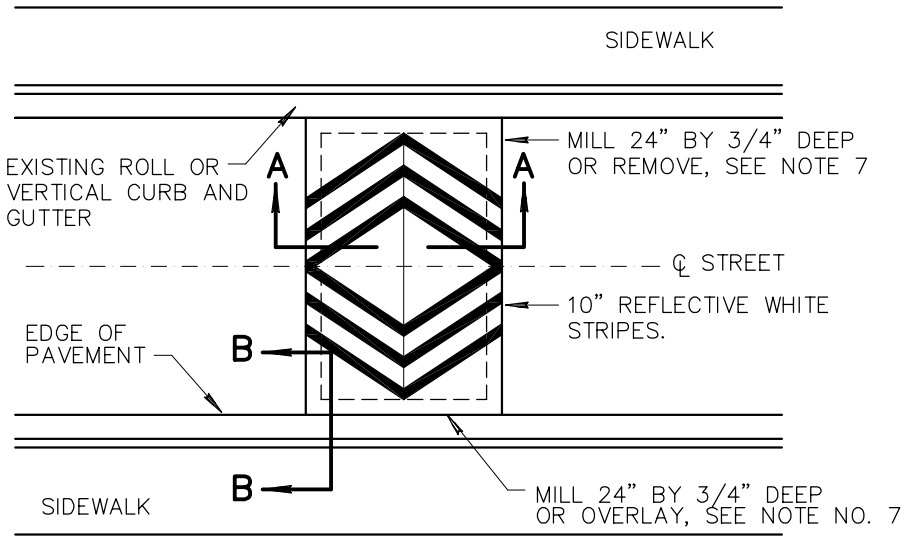

PLAN VIEW

NOTES:

1. HUMPS MUST BE THE FULL 3" FOR MAXIMUM EFFECT BUT SHALL NOT EXCEED 3.25".
2. HUMPS CONSTRUCTED OVER 3.25" SHALL BE REMOVED AND REPLACED AT THE CONTRACTOR'S EXPENSE.
3. CROSS-SECTION ELEVATIONS SHALL HAVE A MAXIMUM TOLERANCE OF +0.25".
4. SPEED HUMPS SHALL NOT BE PLACED OVER MANHOLES, WATER VALVES, SURVEY MONUMENTS, JUNCTION CHAMBERS, ETC. OR IN CONFLICT WITH DRIVEWAYS.
5. SPEED HUMPS MUST BE PLACED AT LOCATIONS APPROVED BY THE AGENCY.
6. HUMP TO BE CONSTRUCTED WITH ASPHALT MIX APPROVED BY THE AGENCY. ASPHALT COMPACTION SHALL BE PER SECTION 321. A TACK COAT PER SECTION 713 SHALL BE APPLIED PRIOR TO APPLICATION OF PAVEMENT.
7. INSTALLATION JOINTS:
   A. STANDARD INSTALLATION:
      THE EXISTING ROADWAY SHALL BE MILLED TO A MINIMUM DEPTH OF 3/4" AROUND THE PERIMETER. CROSS SECTION DIMENSIONS DO NOT INCLUDE THE 3/4" MILLING. CONTRACTOR MUST PROVIDE VERIFICATION OF CROSS-SECTION DIMENSIONS.
   B. ALTERNATIVE INSTALLATION:
      FOR TRANSVERSE JOINTS (CROSS ROADWAY), THE EXISTING ASPHALT SHALL BE SAW CUT AND REMOVED FOR A WIDTH OF 18". THE ASPHALT SHALL BE REPLACED WITH THE SAME ASPHALT AND AT THE SAME TIME AS THE HUMP ASPHALT. FOR LONGITUDINAL JOINTS, THE EXISTING ASPHALT SHALL BE OVERLAID AND TAPERED IN 12". CROSS-SECTION DIMENSIONS REFLECT DISTANCES FROM THE SURFACE OF EXISTING ASPHALT.
8. CONTACT THE AGENCY (OR INSPECTOR) ONE WEEK PRIOR TO INSTALLATION TO COORDINATE PAVEMENT MARKINGS AND SIGNING.

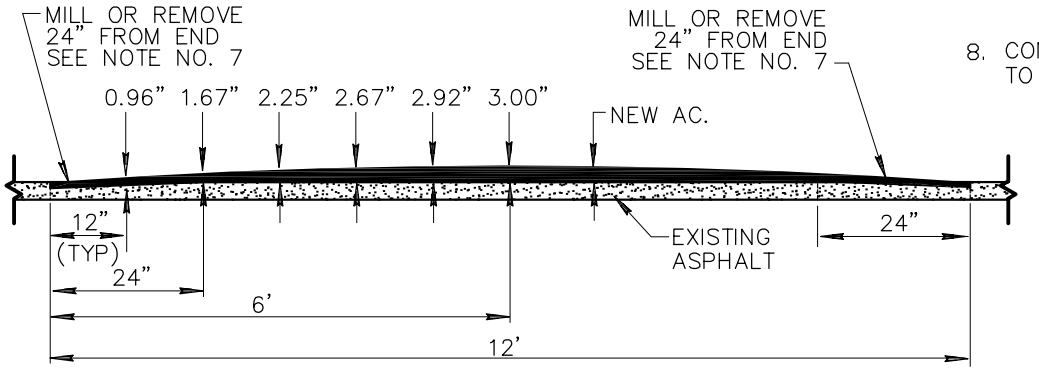

SECTION A-A

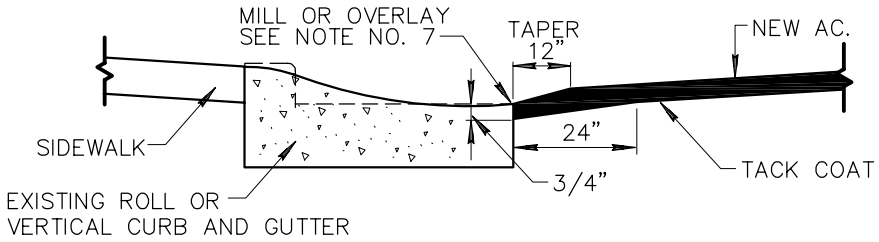

SECTION B-B

IMPORTANT:
TO GAIN MAXIMUM EFFECT, HUMPS MUST BE THE FULL 3". CONTRACTORS MUST NOT EXCEED THIS HEIGHT BASED ON CONSIDERATION FOR EMERGENCY POLICE AND FIRE DEPARTMENT VEHICLES.

DETAIL NO.			REVISED	DETAIL NO.
210	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	RESIDENTIAL SPEED HUMP	01-01-2006	210

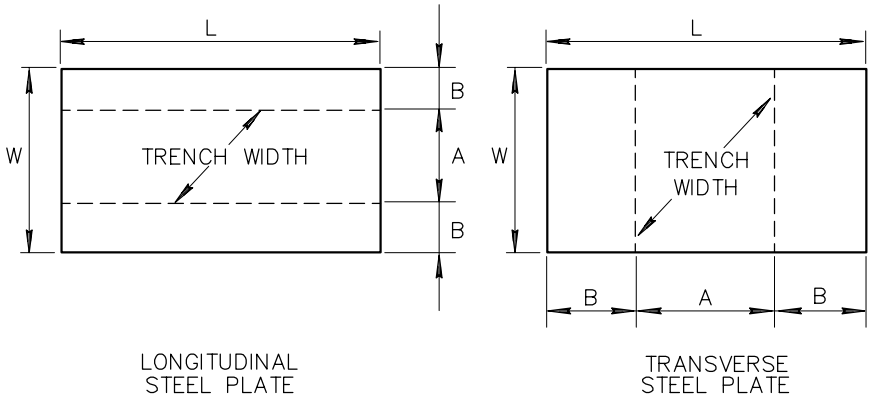

LONGITUDINAL STEEL PLATE

TRANSVERSE STEEL PLATE

PLATE SIZE						
LONGITUDINAL					TRANSVERSE	
(A)	(B)	THICKNESS	(W)	(L)	(A)	(B)
12"	18"	1"	4'	8'	58"	19"
12"	18"	1"	4'	10'	58"	31"
24"	18"	1"	5'	10'	70"	25"
36"	18"	1"	6'	10'	44"	38"
48"	18"	1"	7'	10'	52"	34"
60"	18"	1"	8'	10'	58"	31"
12"	18"	1-1/4"	4'	15'	88"	47"
24"	18"	1-1/4"	5'	12'	104"	20"
36"	18"	1-1/4"	6'	12'	66"	39"
36"	18"	1-1/4"	6'	16'	66"	63"
48"	18"	1-1/4"	7'	12'	76"	33"
48"	18"	1-1/4"	7'	16'	76"	58"
60"	18"	1-1/4"	8'	12'	86"	29"
60"	18"	1-1/4"	8'	15'	86"	47"
60"	18"	1-1/4"	8'	16'	86"	63"
60"	18"	1-1/4"	8'	20'	86"	77"
60"	18"	1-3/8"	8'	20'	102"	69"

NOTES:

1. USE TYPE 1 PLATE INSTALLATION WHERE POSTED SPEED LIMIT IS LESS THAN 30 MPH. USE TYPE 2 PLATE INSTALLATION WHERE POSTED SPEED LIMIT IS 30 MPH OR GREATER.
2. FOR TYPE 2 PLATE INSTALLATION, THE STEEL PLATE SHALL BE RECESSED BY MILLING INTO THE EXISTING ASHPALT TO SET FLUSH WITH THE SURFACE OF THE EXISTING ASPHALT. FULL DEPTH CUTTING OF PAVEMENT SECTION OUTSIDE OF TRENCH IS NOT PERMITTED. MILLING DEPTH SHALL MATCH THICKNESS OF PLATE. THE GAP BETWEEN THE EDGE OF THE PLATE AND THE ADJACENT EXISTING ASPHALT PAVEMENT MUST BE FILLED WITH TEMPORARY ASPHALT.
3. TRENCH WIDTHS ARE BASED ON AN ANALYSIS PER THE 14TH EDITION OF STANDARD SPECIFICATIONS FOR HIGHWAY BRIDGES BY AASHTO. AN ASSUMED AXLE LOADING OF 12 TONS WITH A 30% IMPACT FACTOR WAS USED. THE AXLE LENGTH IS 6 FEET: THEREFORE THE NUMBER OF WHEELS CARRIED BY A PLATE DEPENDS ON THE ROADWAY WIDTH.
4. STEEL PLATE MUST BE ABLE TO WITHSTAND H-20 TRAFFIC LOADINGS WITHOUT ANY MOVEMENT.
5. PLATES SHALL BE FABRICATED FROM ASTM A36 STEEL (MIN).
6. PLATES SHALL BE SECURED FROM LATERAL MOVEMENT AND VERTICAL VIBRATION (ASSOCIATED NOISE) WHILE IN USE BY TEMPORARY ASPHALT (COLD MIX.)

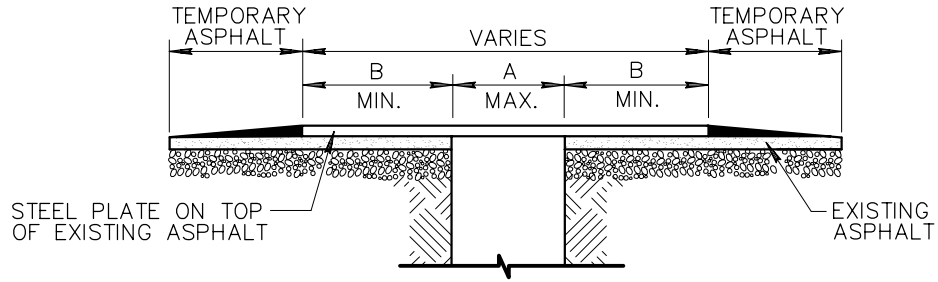

TYPE 1

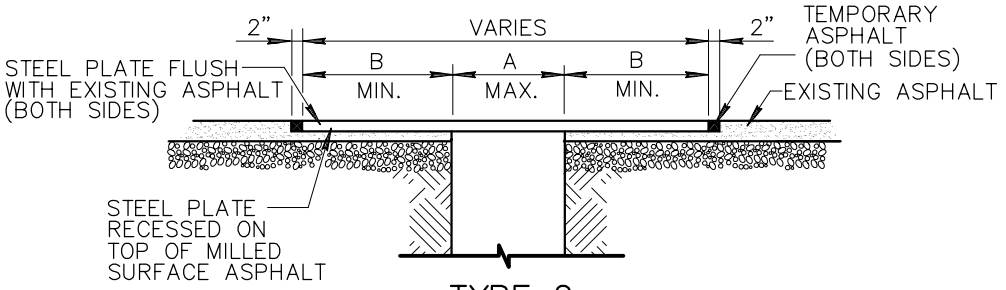

TYPE 2

DETAIL NO.			REVISED	DETAIL NO.
211	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	STANDARD TRENCH PLATING DETAIL		211

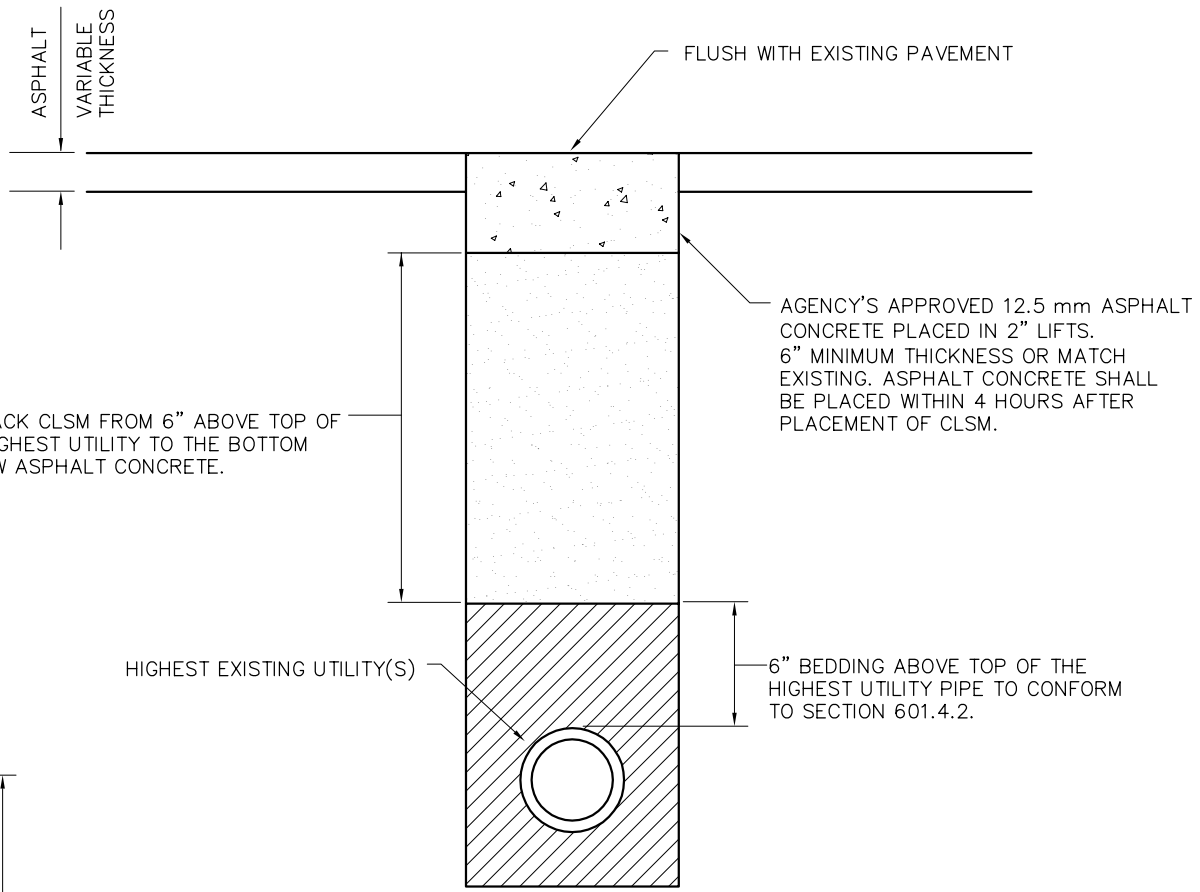

SECTION A–A



POTHOLE PLAN VIEW

(NOMINAL DIMENSIONS)

DETAIL NO.			REVISED	DETAIL NO.
212	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	UTILITY POTHOLE REPAIR	01–01–2005	212

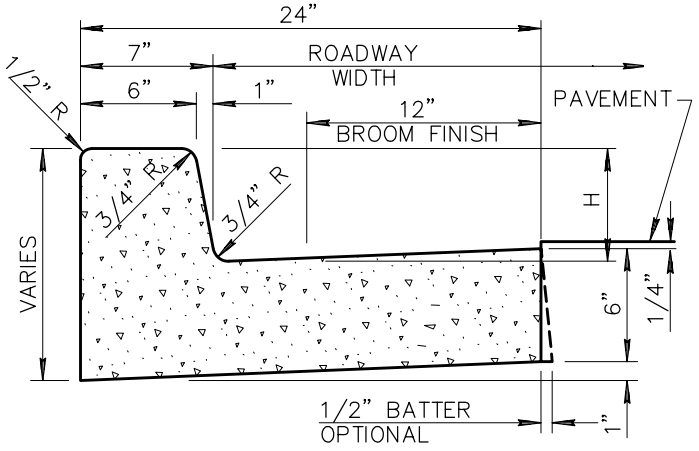

VERTICAL CURB AND GUTTER (TYPE A)

NOTES: (TYPE A)

1. ALL EXPOSED SURFACES TO BE TROWEL FINISHED EXCEPT AS SHOWN. SEE SECT. 340.
2. H=6" OR AS SPECIFIED ON PLANS.
3. CONTRACTION JOINT SPACING 10' MAXIMUM.
4. EXPANSION JOINTS AS PER SECT. 340.
5. CLASS 'B' CONCRETE PER 725.
6. WHEN THE ADJACENT PAVEMENT SECTION SLOPES AWAY FROM THE GUTTER, THE SLOPE OF THE GUTTER PAN SHALL MATCH PAVEMENT CROSS SLOPE.

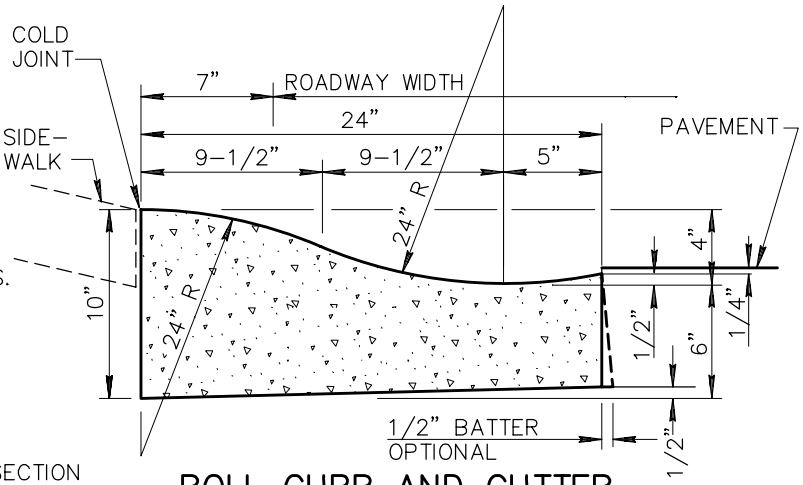

ROLL CURB AND GUTTER (TYPE C)

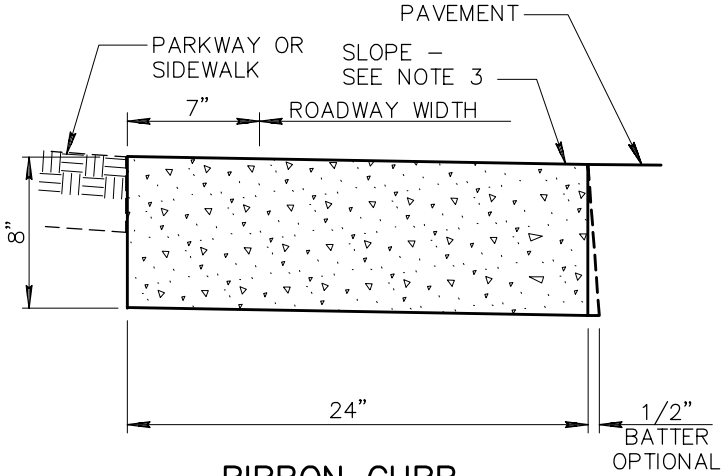

RIBBON CURB (TYPE B)

NOTES: (TYPE B)

1. CONSTRUCT CURB AND INSTALL 1/2" MASTIC EXPANSION JOINTS, A.S.T.M. D-1751. SECT. 340.
2. BROOM FINISH ALL SURFACES.
3. RIBBON CURB MAY SLOPE TOWARDS PAVEMENT OR PARKWAY AS INDICATED ON PLANS.
4. CONTRACTION JOINT SPACING 10' MAXIMUM.
5. CONCRETE SHALL BE CLASS 'B' PER SECT. 725 AND INSTALLED PER SECT. 505.

SPECIAL SECT. USE FOR HIGH SIDE CURB WITH SHEET DRAINAGE ACROSS STREET

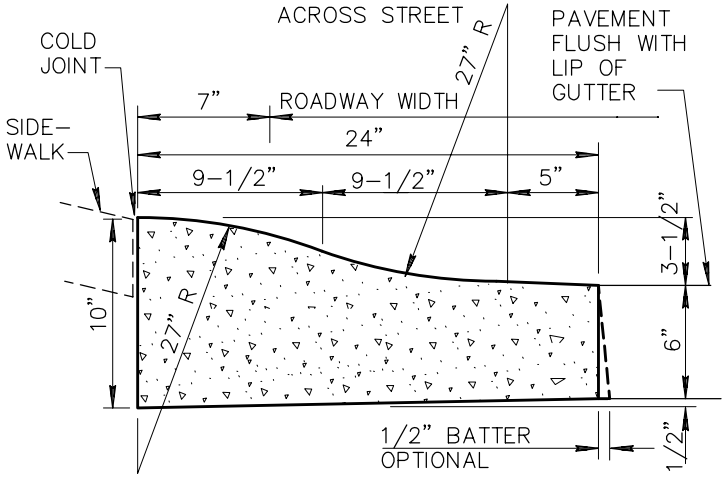

(TYPE D)

NOTES: (C & D)

1. ALL WORK AND MATERIALS SHALL CONFORM TO SECT. 304, 505 AND 725. BROOM FINISH TO EXPOSED SURFACE.
2. CONTRACTION JOINT SPACING 10' MAXIMUM.
3. EXPANSION JOINTS AS PER SECT. 340.
4. CLASS 'B' CONCRETE PER 725.

DETAIL NO.				REVISED	DETAIL NO.
220-1	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	CURB AND GUTTER TYPES A, B, C AND D		01-01-2007	220-1

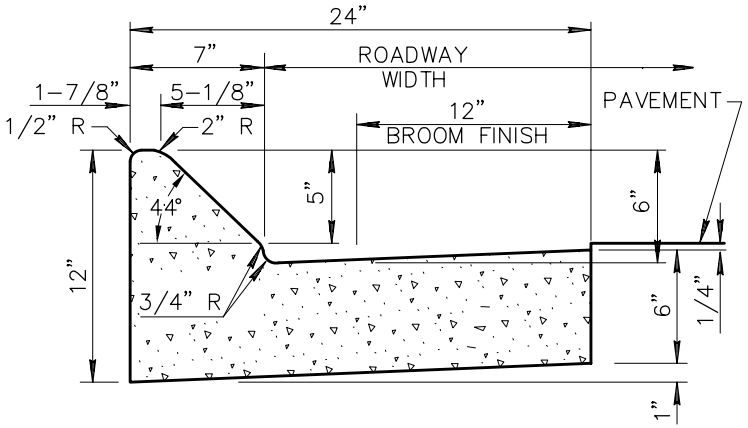

MOUNTABLE CURB AND GUTTER (TYPE E)

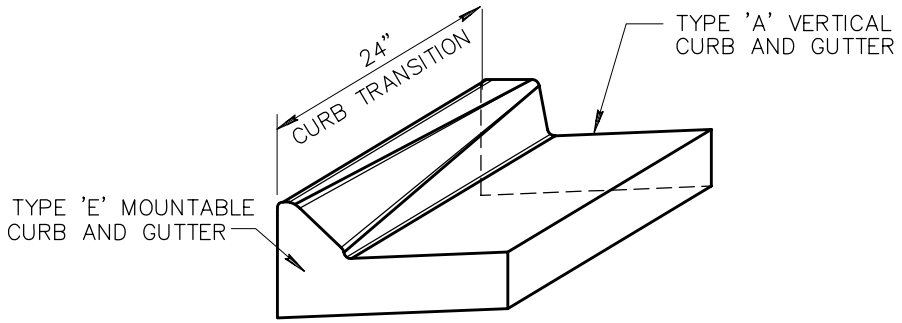

CURB TRANSITION TYPE 'E' TO TYPE 'A'

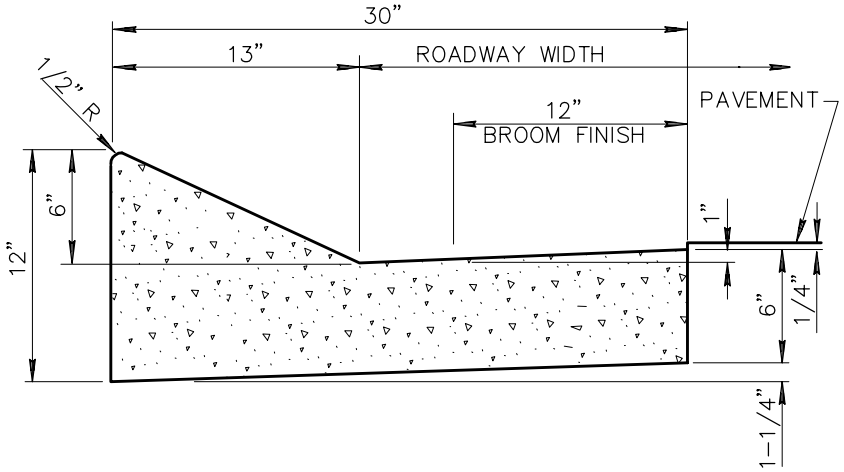

MOUNTABLE CURB AND GUTTER (TYPE F)

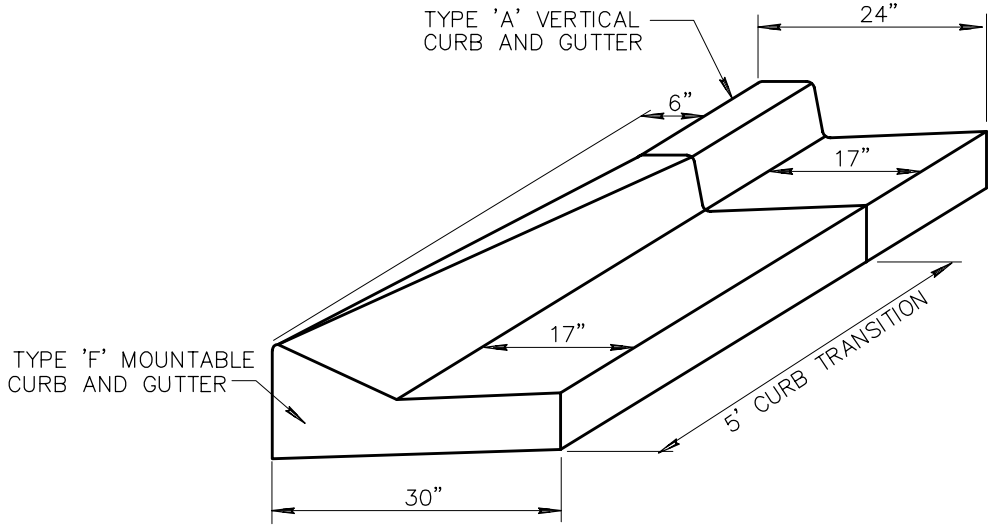

CURB TRANSITION TYPE 'F' TO TYPE 'A'

NOTES: (E & F)

1. ALL EXPOSED SURFACES TO BE TROWEL FINISHED EXCEPT AS SHOWN. SEE SECT. 340.
2. CONTRACTION JOINT SPACING 10' MAXIMUM.
3. EXPANSION JOINTS PER SECT. 340.
4. CLASS 'B' CONCRETE PER SECT. 725.
5. WHEN THE ADJACENT PAVEMENT SECTION SLOPES AWAY FROM THE GUTTER, THE SLOPE OF THE GUTTER PAN SHALL MATCH THE PAVEMENT CROSS SLOPE.

DETAIL NO.			REVISED	DETAIL NO.
220-2	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	CURB AND GUTTER TYPES E AND F	01-01-2007	220-2

CURB TRANSITION TYPE 'A' TO TYPE 'C'

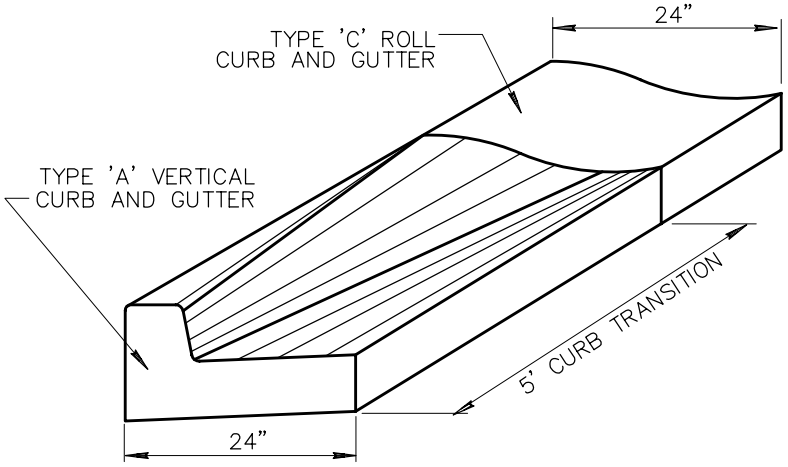

CURB AND GUTTER TRANSITION

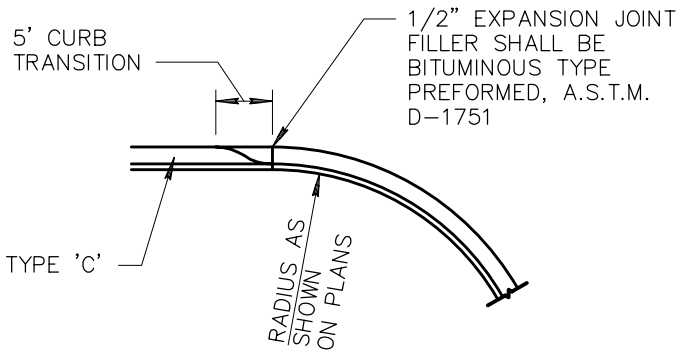

NOTES: (CURB AND GUTTER TRANSITIONS)

1. THE CURB TRANSITION WILL BE PAID FOR AS TYPE 'C'. WHEN A PROJECT RETURN AND GUTTER THROUGHOUT, THE ENTIRE RETURN AND GUTTER THROUGHOUT, THE ENTIRE RETURN SHALL BE MEASURED AND PAID FOR AS TYPE 'A'.
2. WHERE PROPOSED CONSTRUCTION IS TO BE CONNECTED TO EXISTING CURB AND GUTTER, THE TRANSITION SHALL BE INDICATED ON PLANS.
3. CLASS 'B' CONCRETE PER SECT. 725.
4. TRANSITION BETWEEN TYPICAL SECTIONS SHALL BE ACCOMPLISHED BY THE USE OF DIRECT STRAIGHT LINE TRANSITIONS OF THE FLOW LINE AND OTHER SURFACE FEATURES.

INTEGRAL ROLL CURB, GUTTER AND SIDEWALK

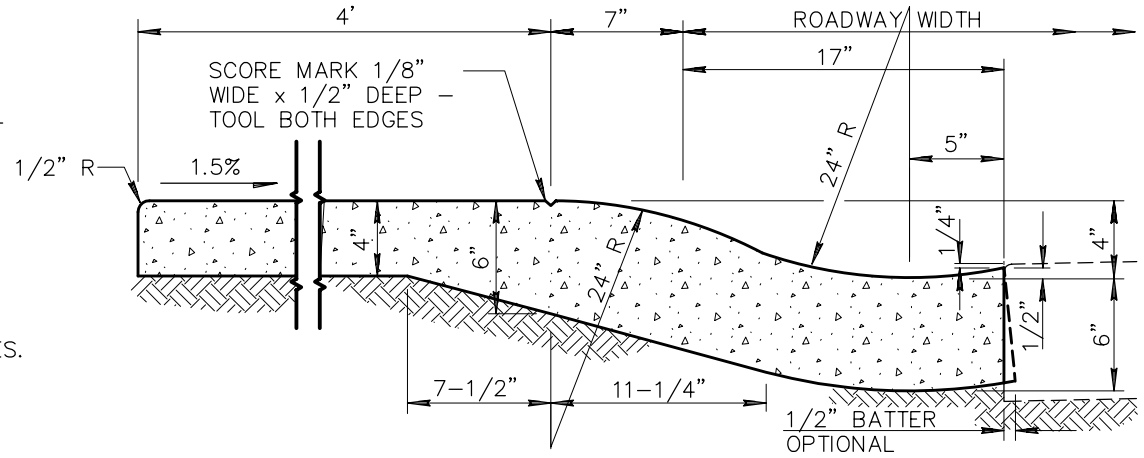

NOTES: (INTEGRAL ROLL CURB, GUTTER AND SIDEWALK)

1. CONCRETE TO BE MONOLITHIC POUR. EXPOSED SURFACE FINISH AS PER SIDEWALK AND GUTTER DETAIL.
2. CONTRACTION JOINT SPACING 5' MAXIMUM.
3. EXPANSION JOINTS PER SECT. 340.
4. CLASS 'B' CONCRETE PER SECT. 725.

DETAIL NO.				REVISED	DETAIL NO.
221	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	**CURB AND GUTTER TRANSITION TYPE A TO TYPE C INTEGRAL ROLL CURB, GUTTER AND SIDEWALK**		01-01-2008	221

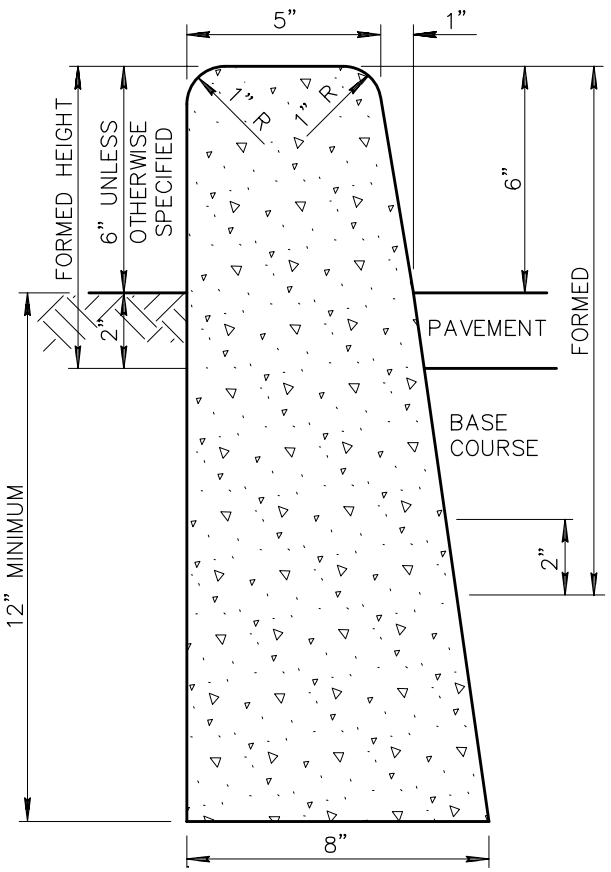

TYPE 'A'

NOTES:

1. ALL VERTICAL SURFACES TO BE FORMED.
2. VERTICAL SURFACES DOWN FROM 2" BELOW UNDISTURBED SOIL MAY BE PLACED AGAINST NEAT CUT IF APPROVED BY THE ENGINEER AND CONCRETE WILL NOT EXTEND MORE THAN 1" BEYOND THEORETICAL FACE.
3. ALL EXPOSED SURFACES TO BE STRIPPED GREEN AND TROWEL FINISHED.
4. CONCRETE CURBS CONFORM TO SECT. 340.
5. MAXIMUM SPACING OF CONTRACTION JOINTS IS 10'
6. CONCRETE TO BE CLASS 'B' PER SECT. 725.
7. WHEN PAVEMENT AND BASE COURSE EQUALS OR EXCEEDS 10" IN DEPTH, THE ENTIRE ROADWAY SIDE OF THE CURB SHALL BE FORMED. THE TOTAL CURB HEIGHT REMAINS 18" UNLESS NOTED OTHERWISE.

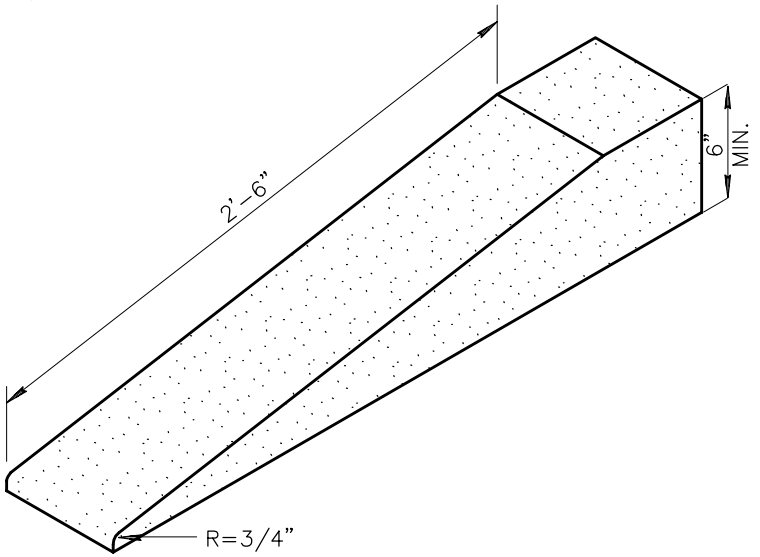

TYPICAL CURB TERMINATION

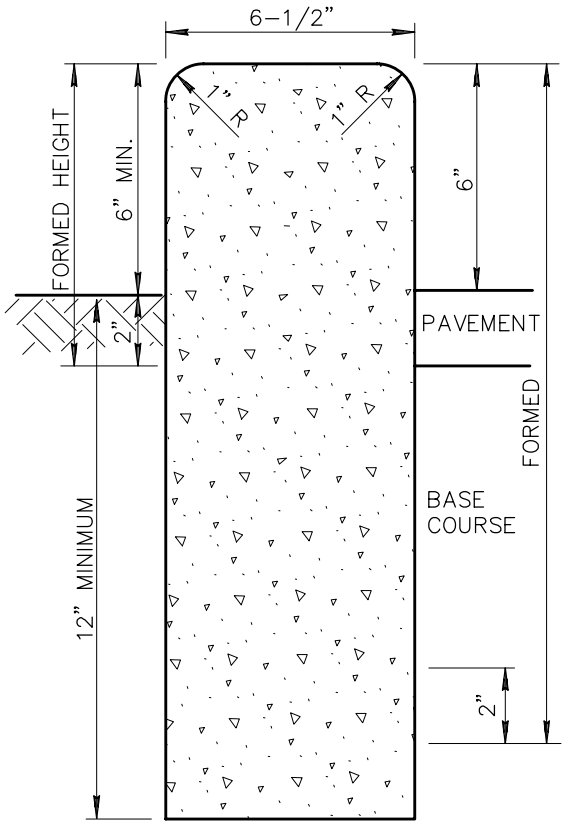

TYPE 'B'

DETAIL NO.			REVISED	DETAIL NO.
222	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	SINGLE CURB – TYPES A, B AND TERMINATION	01-01-2008	222

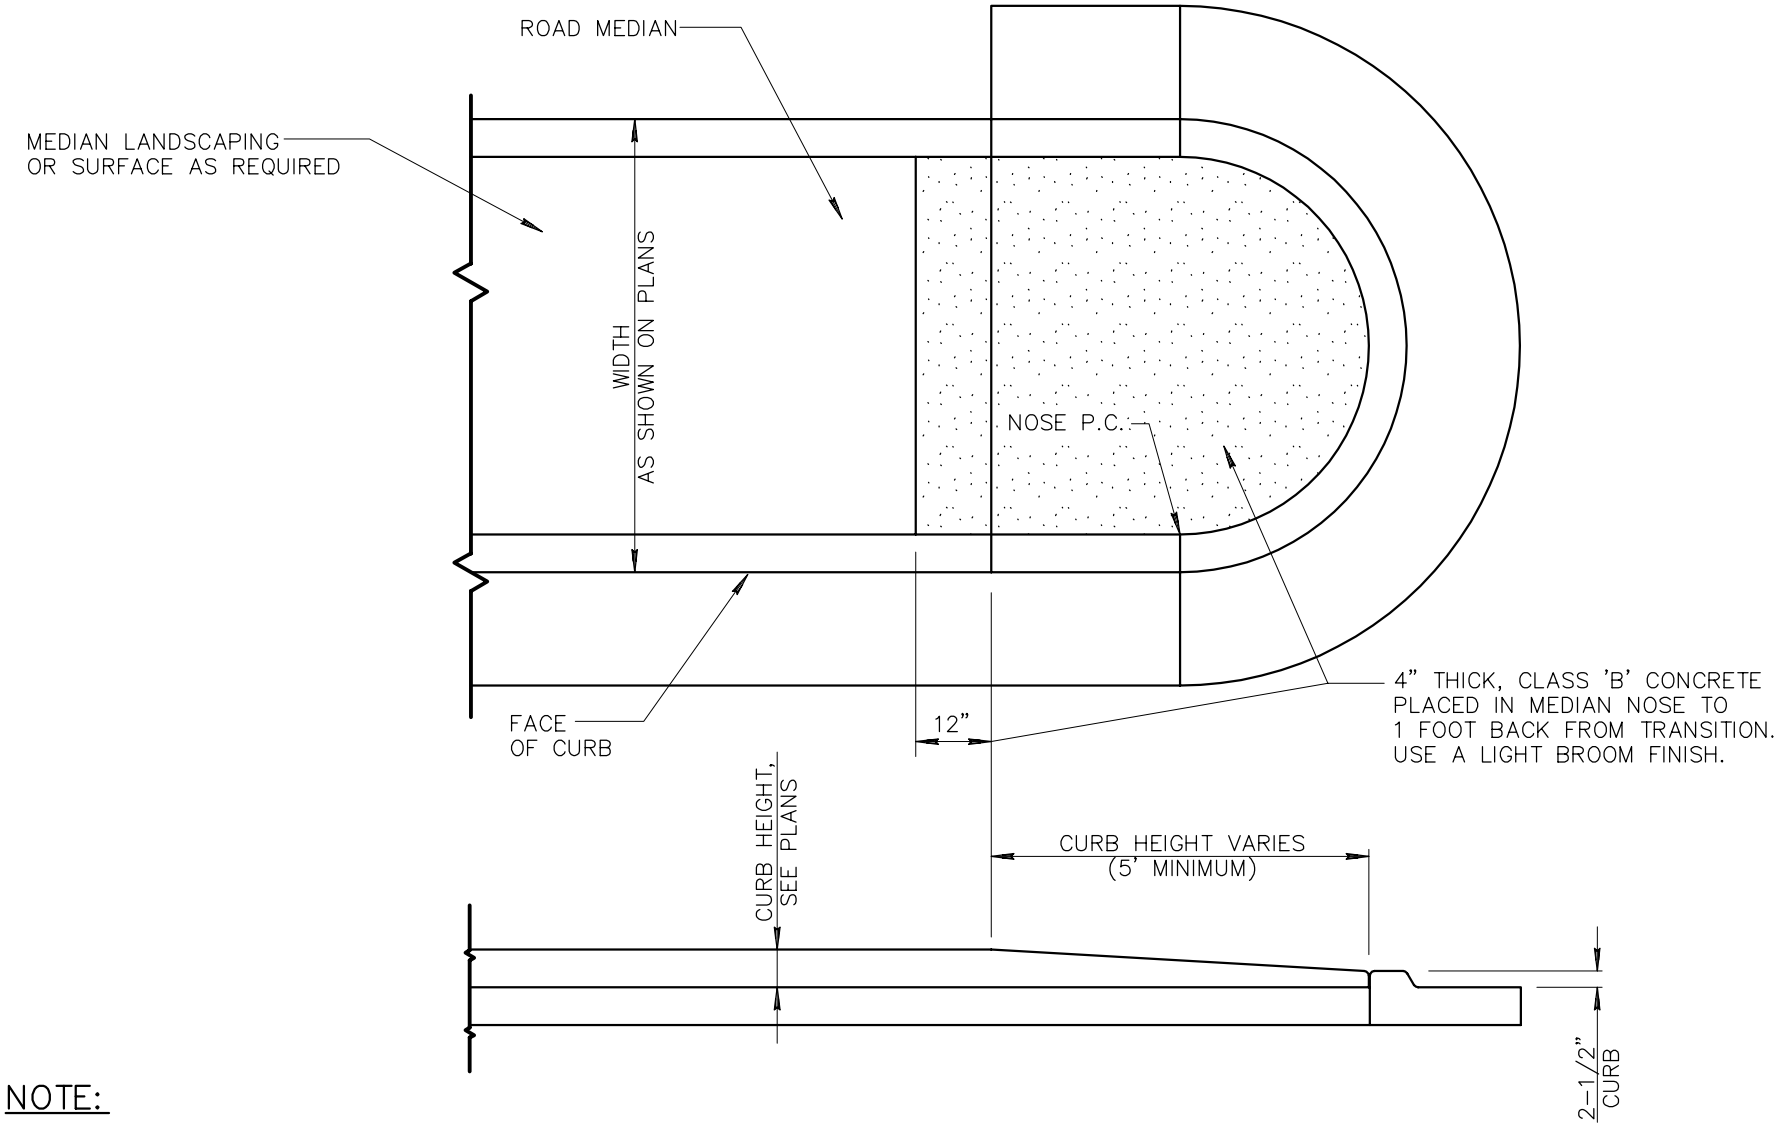

NOTE:

LENGTH OF TRANSITION SHALL BE EQUAL TO RADIUS OF MEDIAN NOSE, (5' MINIMUM). FOR LOCATION SEE PLANS.

DETAIL NO.			REVISED	DETAIL NO.
223	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	MEDIAN NOSE TRANSITION		223

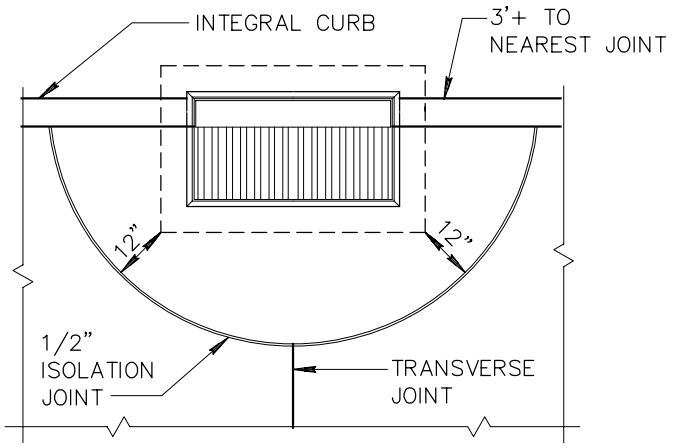

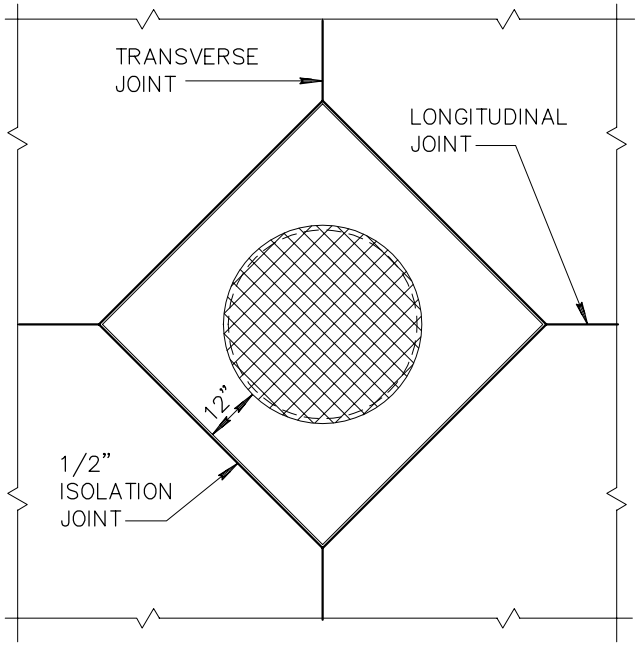

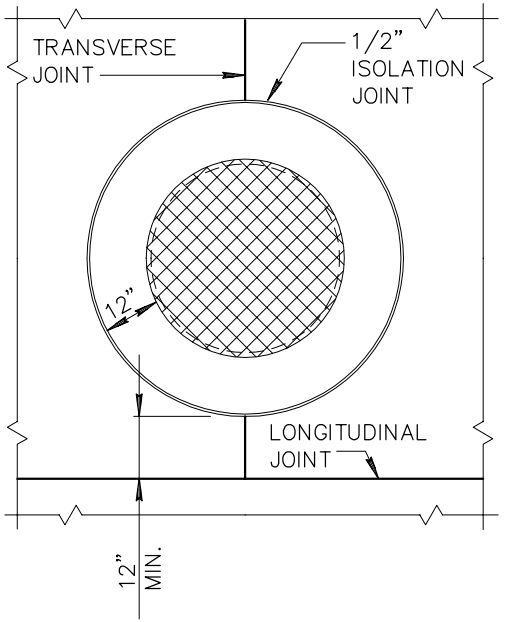

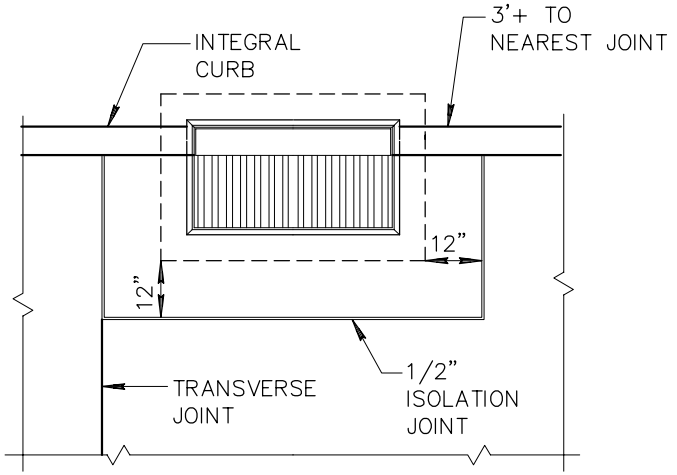

DRAINAGE INLET

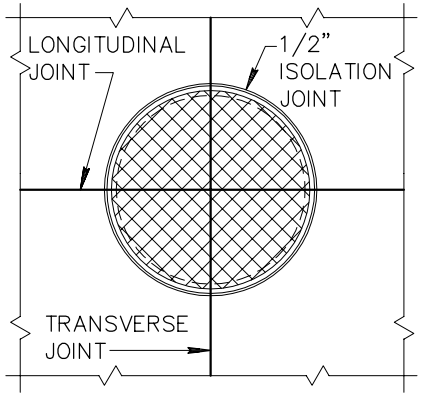

MANHOLE COVERS

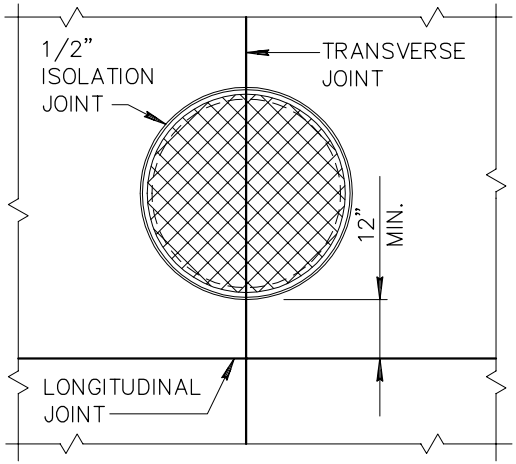

MANHOLE COVERS

DETAIL NO. 224	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	JOINT FOR DRAINAGE INLETS AND MANHOLE COVERS	REVISED	DETAIL NO. 224

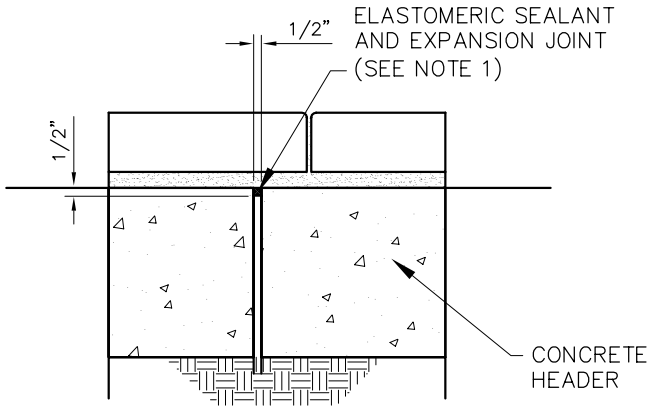

EXPANSION JOINT DETAIL

NOTES:

1. 1/2 INCH EXPANSION JOINT, ASTM D–1751 PER SEC. 729 AND ELASTOMERIC SEALANT PER SEC. 342
2. CONTRACTION JOINTS PER SEC. 342
3. MATERIALS AND CONSTRUCTION PER SEC. 342
4. PORTLAND CEMENT CONCRETE SHALL BE CLASS A
5. DESIGN PARAMETERS FOR THE THICKNESS IS BASED ON:
   ASSUMES MODULUS OF SUBGRADE REACTION (K) = 100 pci
   CONCRETE WORKING STRESS (f1) = 300 psi
   TERMINAL SERVICABILITY INDEX (p1) OF 2.5 OVER 20 YEARS AND 1 MILLION TOTAL EQUIVALENT 18–KIP SINGLE–AXLE LOAD APPLICATIONS

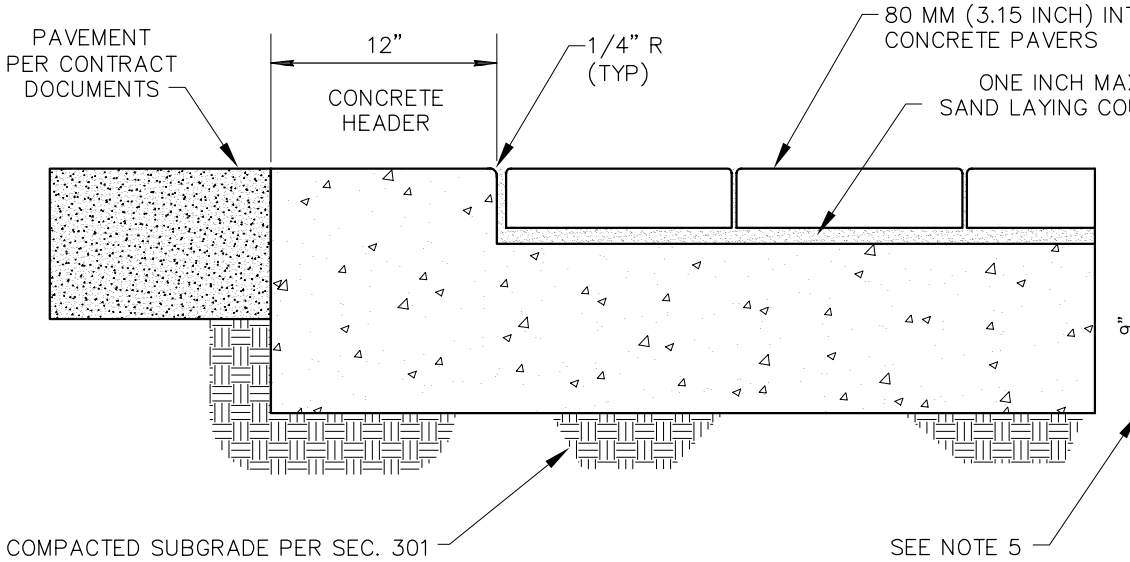

TYPICAL HALF SECTION
(AGAINST PAVEMENT)

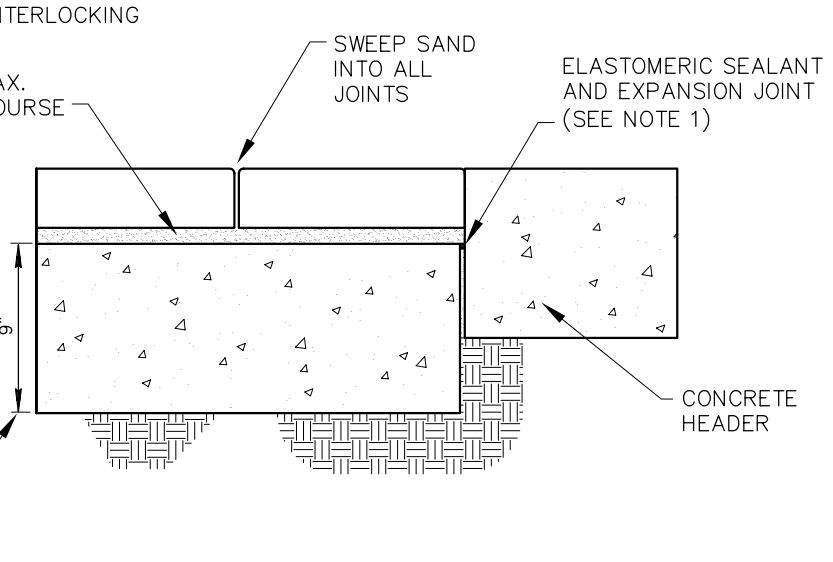

TYPICAL SECTION AT END OR ALTERNATE
HALF SECTION (AGAINST CONCRETE)

DETAIL NO.			REVISED	DETAIL NO.
225	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**CONCRETE PAVERS**	01–01–2005	225

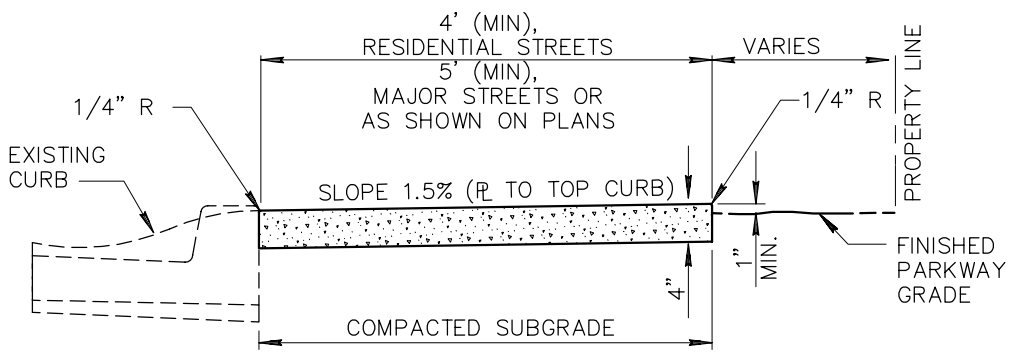

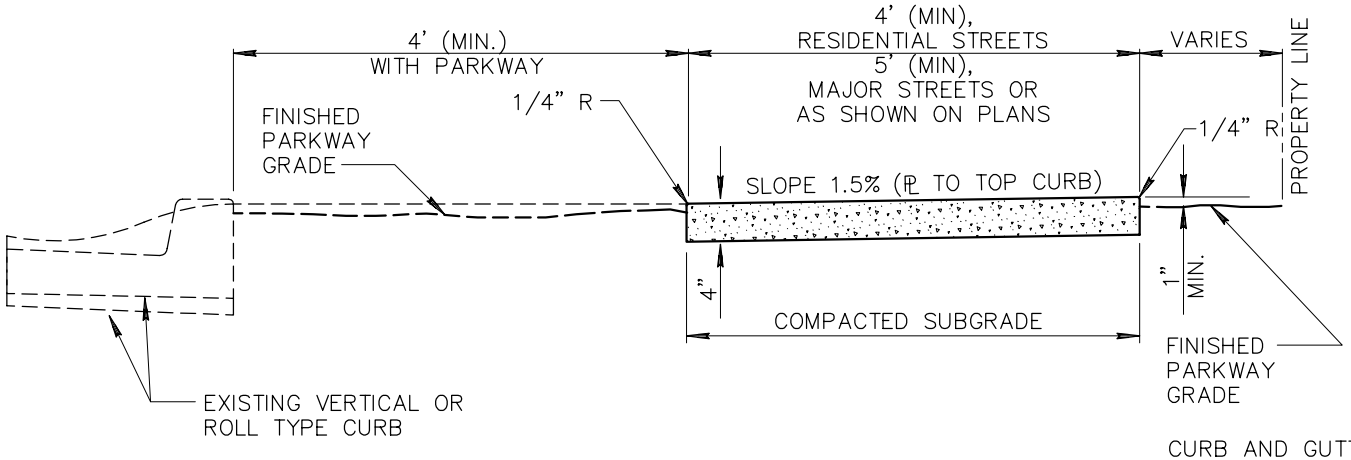

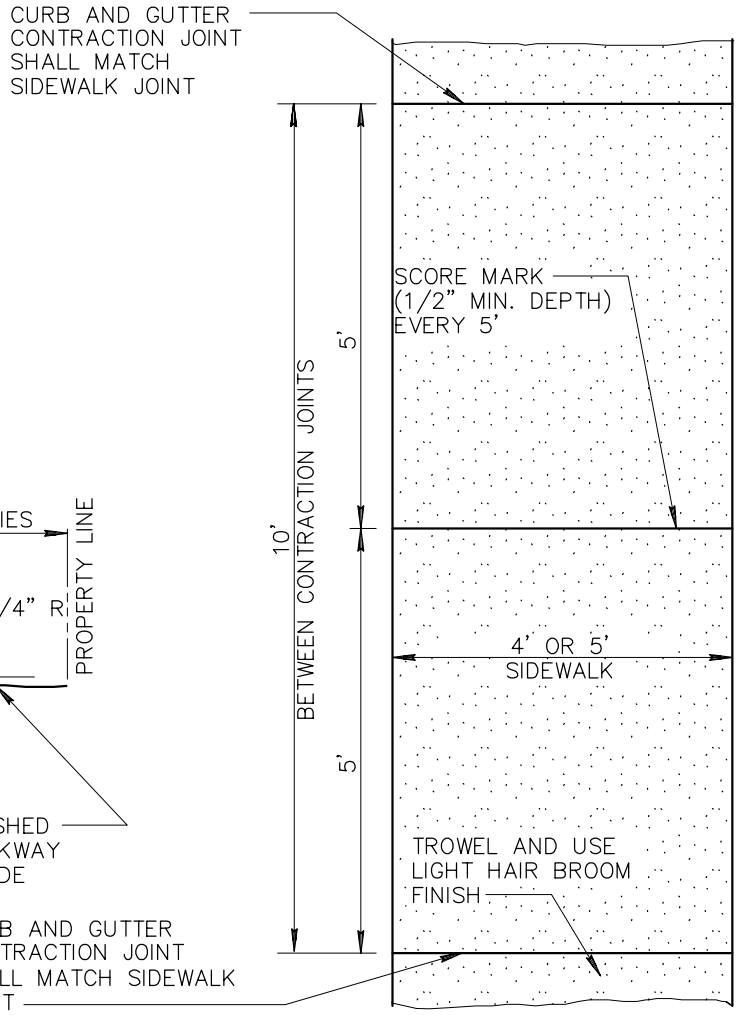

NOTES:

1. SIDEWALK CONSTRUCTION SHALL CONFORM TO SECT. 340.
2. EXPANSION JOINTS SHALL BE 1/2" BITUMINOUS TYPE PREFORMED EXPANSION JOINT FILLER, A.S.T.M. D–1751.
3. LARGE AGGREGATE, IN CONTRACTION JOINT, SHALL BE SEPARATED TO A DEPTH OF 1", FINISH DEPTH SHALL BE A MINIMUM OF 3/4".
4. EXPANSION JOINT 50' MAXIMUM SPACING PER SECT. 340.
5. CLASS 'B' CONCRETE CONSTRUCTION AS PER SECT. 725.

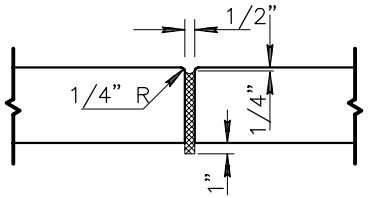

EXPANSION JOINT

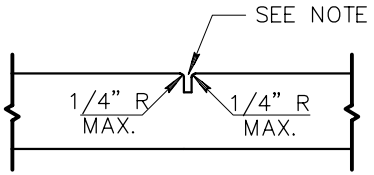

CONTRACTION JOINT

DETAIL NO.			REVISED	DETAIL NO.
230	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	SIDEWALKS	01–01–2003	230

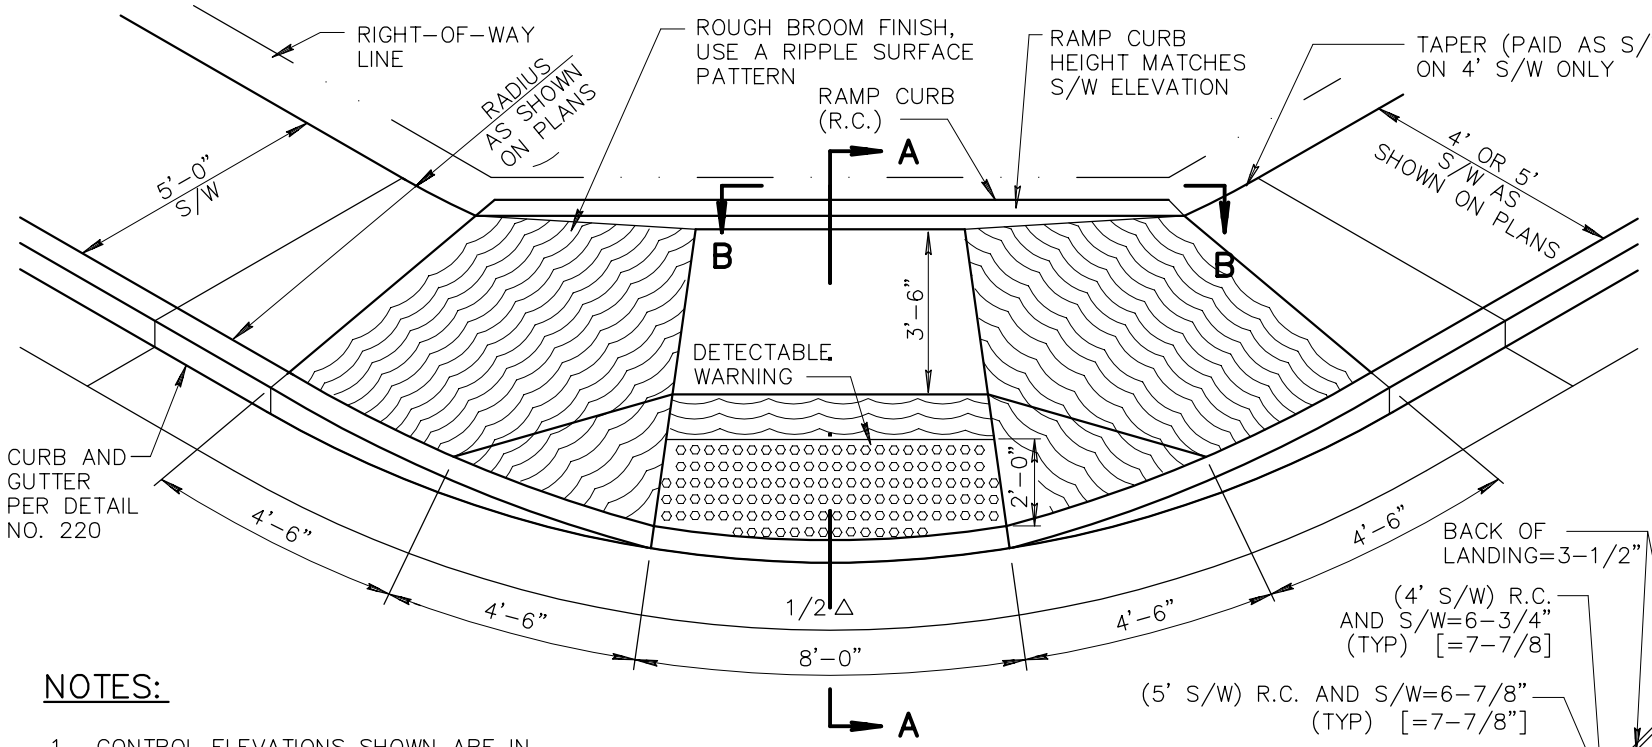

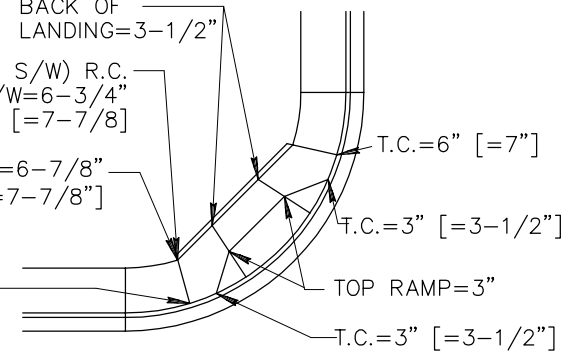

CONTROL ELEVATIONS

SEE NOTES 1 AND 3

NOTES:

1. CONTROL ELEVATIONS SHOWN ARE IN RELATION TO THE GUTTER AND ARE LOCATED RADIALLY. GUTTER ELEVATION=0.
2. CLASS 'B' CONCRETE CONSTRUCTION AS PER SECTION 725.
3. WHEN CURB HEIGHTS OF 7" ARE SHOWN ON PLANS, USE DIMENSIONS SHOWN IN [ ]'S.
4. DETECTABLE WARNING IS TO COMPLY WITH THE JURISDICTIONAL AGENCY'S REQUIREMENTS.

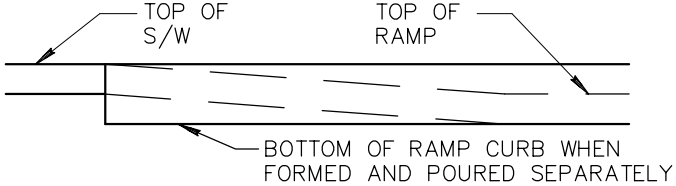

SECTION B-B

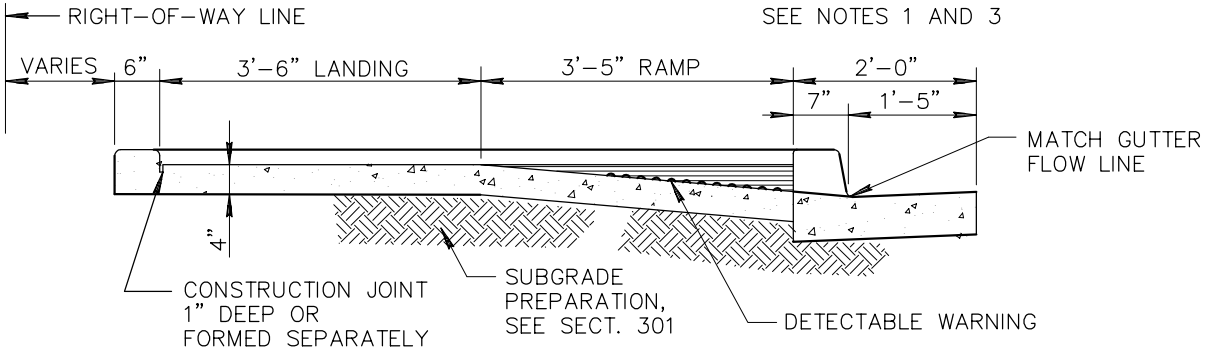

SECTION A-A

DETAIL NO.			REVISED	DETAIL NO.
231	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	SIDEWALK RAMPS - TYPE 'A'	01-01-2006	231

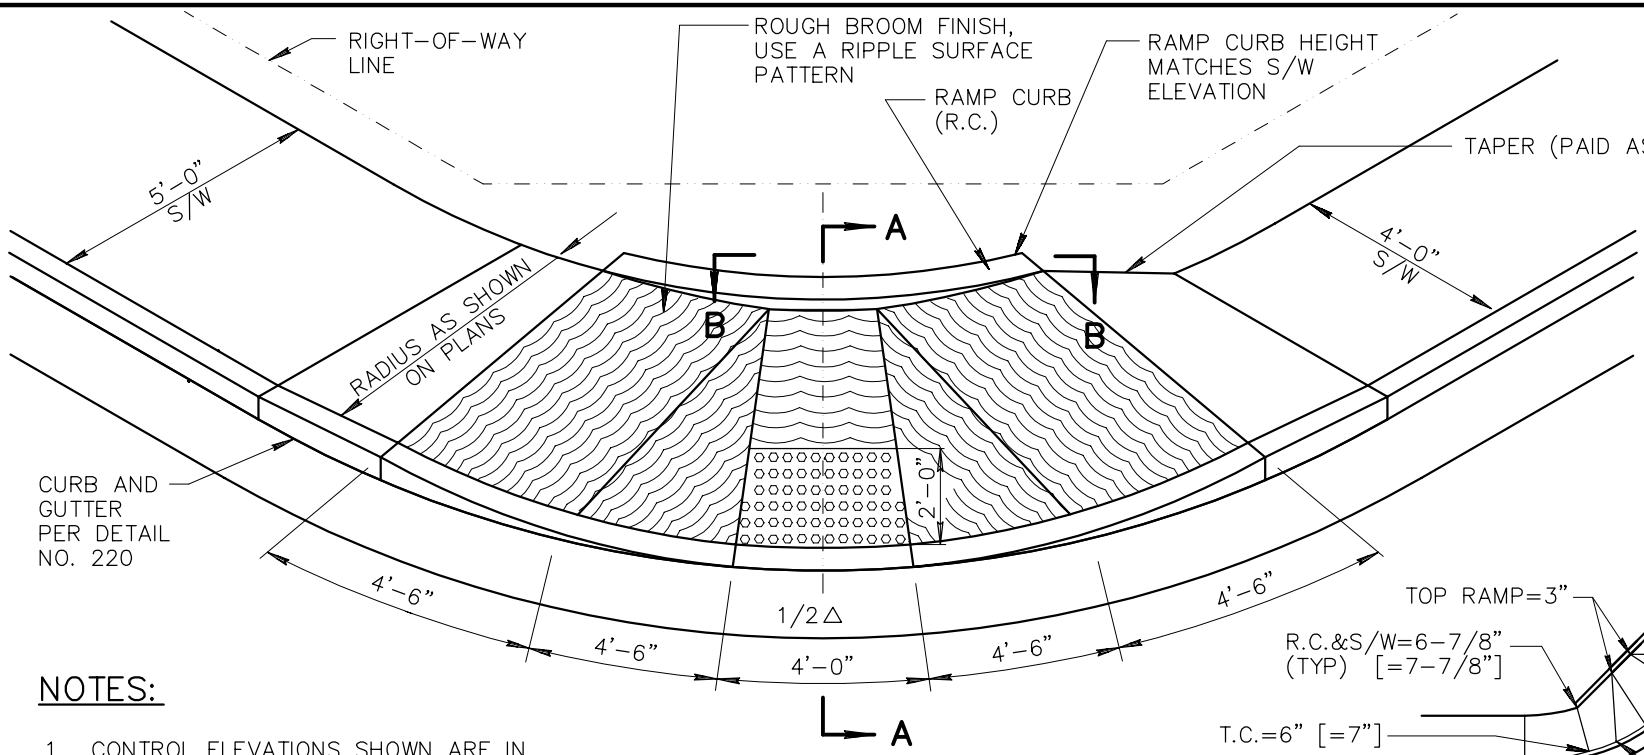

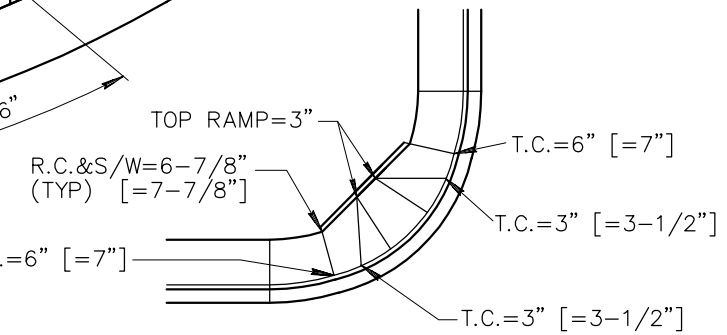

CONTROL ELEVATIONS

SEE NOTES 1 AND 3

NOTES:

1. CONTROL ELEVATIONS SHOWN ARE IN RELATION TO THE GUTTER AND ARE LOCATED RADIALLY. GUTTER ELEVATION=0.
2. CLASS 'B' CONCRETE CONSTRUCTION AS PER SECT. 725.
3. WHEN CURB HEIGHTS OF 7" ARE SHOWN ON PLANS, USE DIMENSIONS SHOWN IN [ ]'S.
4. DETECTABLE WARNING IS TO COMPLY WITH THE JURISDICTIONAL AGENCY'S REQUIREMENTS.

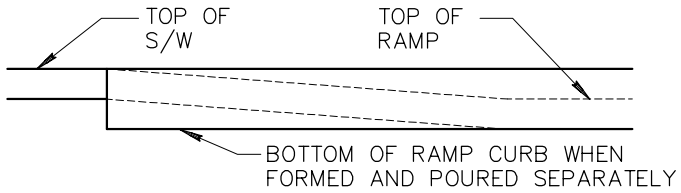

SECTION B-B

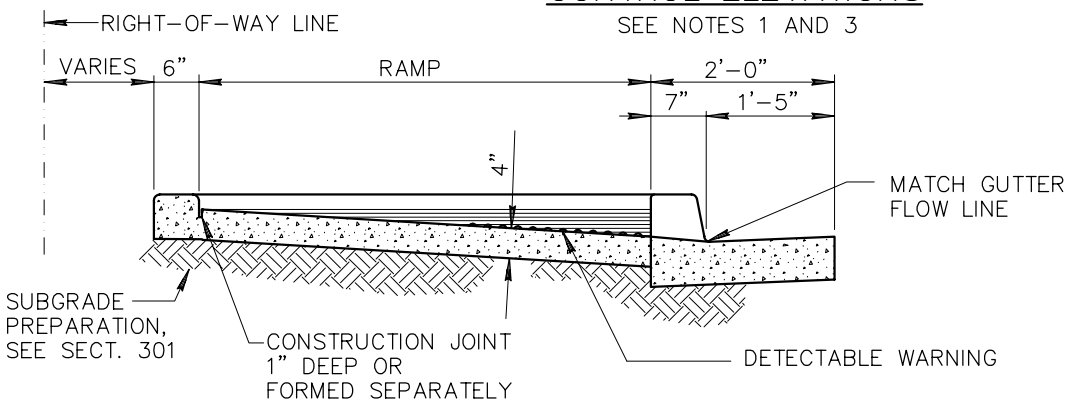

SECTION A-A

DETAIL NO.			REVISED	DETAIL NO.
232	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	SIDEWALK RAMPS - TYPE 'B'	01-01-2006	232

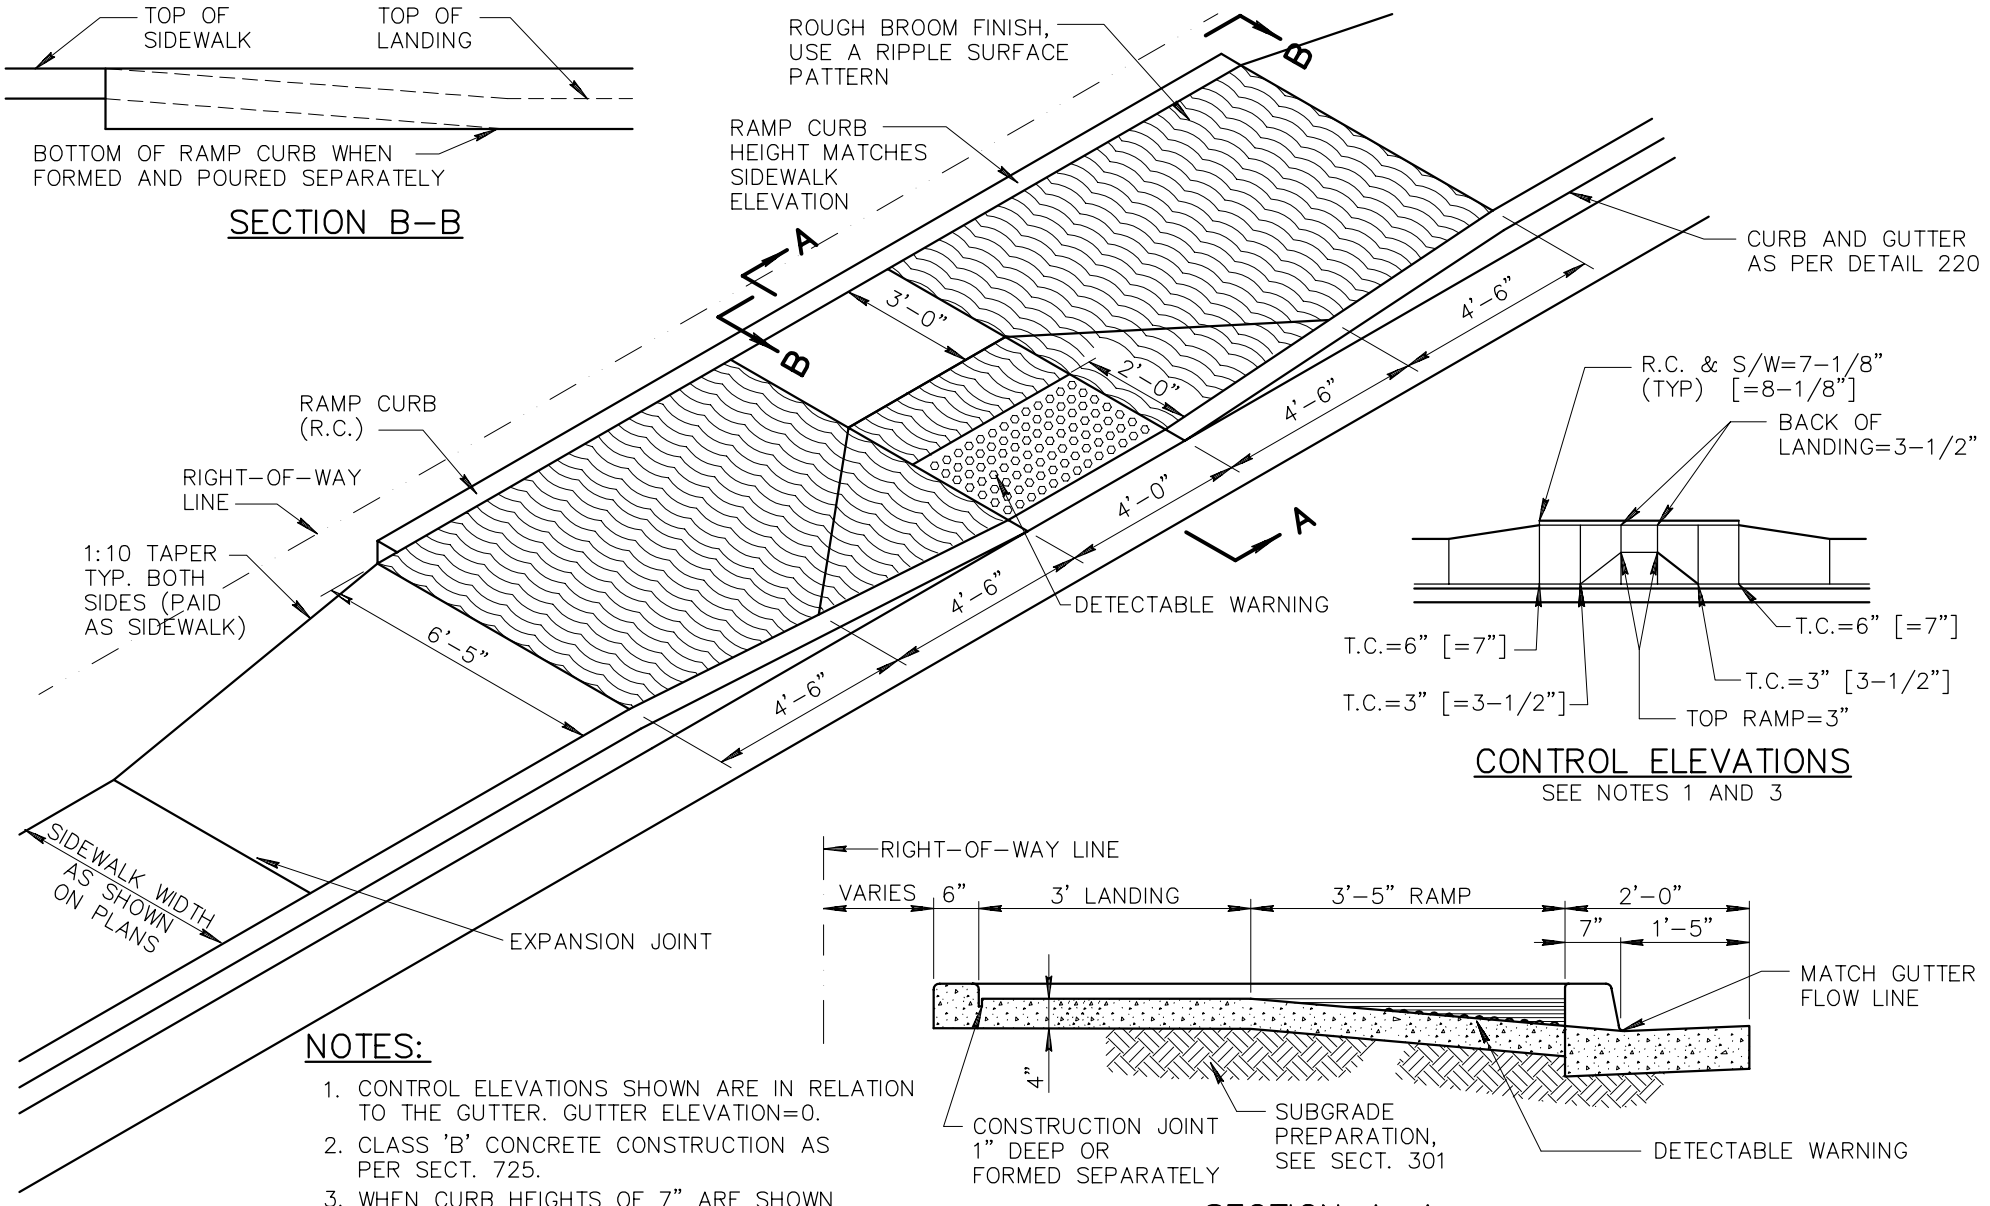

NOTES:

1. CONTROL ELEVATIONS SHOWN ARE IN RELATION TO THE GUTTER. GUTTER ELEVATION=0.
2. CLASS 'B' CONCRETE CONSTRUCTION AS PER SECT. 725.
3. WHEN CURB HEIGHTS OF 7" ARE SHOWN ON PLANS, USE DIMENSIONS SHOWN IN [ ]'S.
4. EXPANSION JOINTS SHALL CONFORM TO SECT. 340.
5. DETECTABLE WARNING IS TO COMPLY WITH THE JURISDICTIONAL AGENCY'S REQUIREMENTS.

DETAIL NO.			REVISED	DETAIL NO.
233	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	SIDEWALK RAMPS - TYPE 'C'	01–01–2006	233

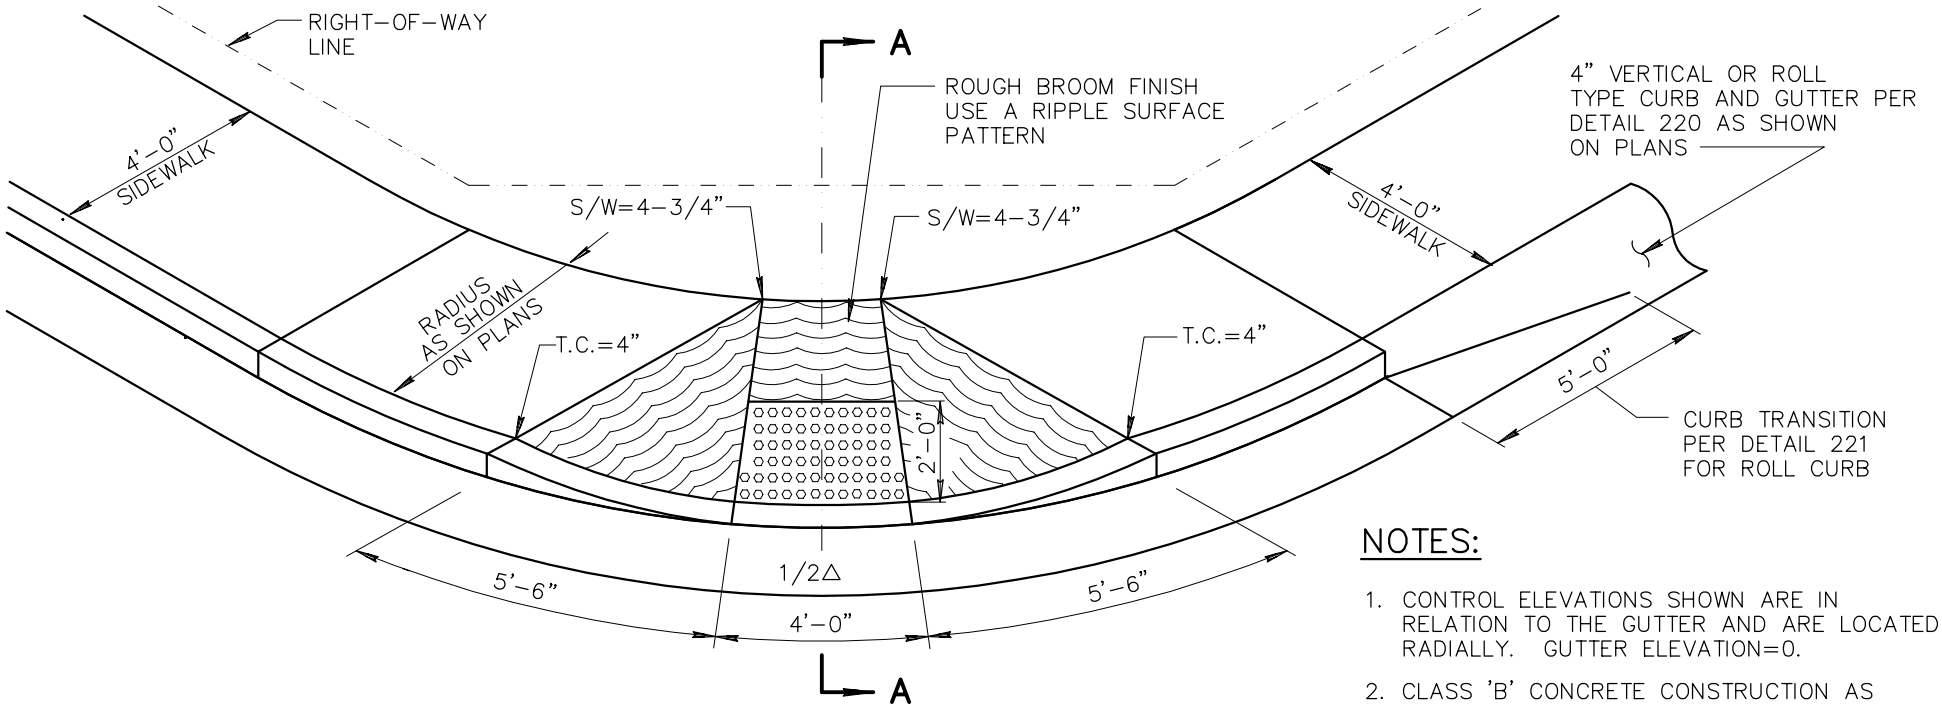

CONTROL ELEVATIONS

NOTES:

1. CONTROL ELEVATIONS SHOWN ARE IN RELATION TO THE GUTTER AND ARE LOCATED RADIALLY. GUTTER ELEVATION=0.
2. CLASS 'B' CONCRETE CONSTRUCTION AS PER SECTION 725.
3. DETECTABLE WARNING IS TO COMPLY WITH THE JURISDICTIONAL AGENCY'S REQUIREMENTS.

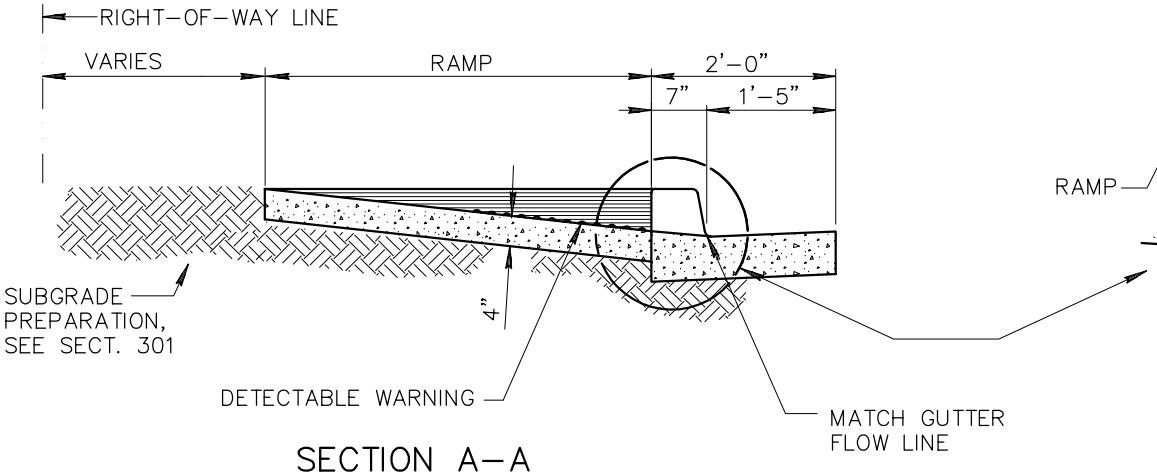

SECTION A-A

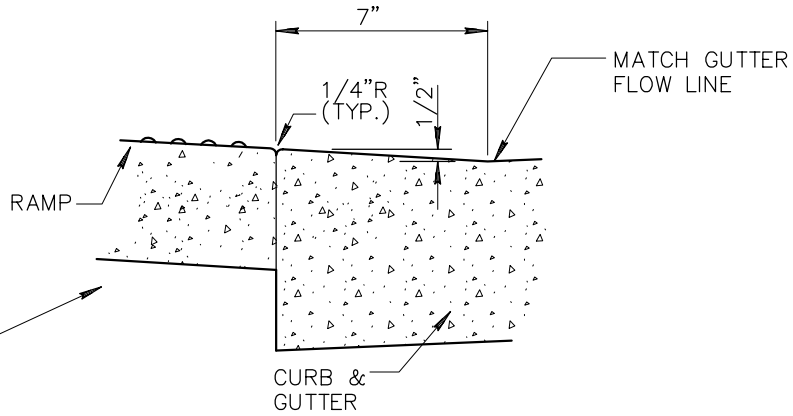

DETAIL 1

DETAIL NO.			REVISED	DETAIL NO.
234	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	SIDEWALK RAMPS - TYPE 'D'	01-01-2006	234

NOTES:

1. ALL CONCRETE TO BE CLASS 'A' UNLESS OTHERWISE APPROVED. (SECT. 725).
2. 4' ON PROJECTS UNDER THE JURISDICTION OF THE COUNTY ENGINEER AND THE CITY OF MESA.
3. EITHER CONSTRUCTION JOINT OR CONTRACTION JOINT IS REQUIRED AT CENTERLINE OF STREET.
4. A SEPARATE CONCRETE PAD IS REQUIRED WHEN VALLEY GUTTER IS POURED HALF AT A TIME.
5. EXPANSION JOINTS SHALL CONFORM TO SECT. 340.

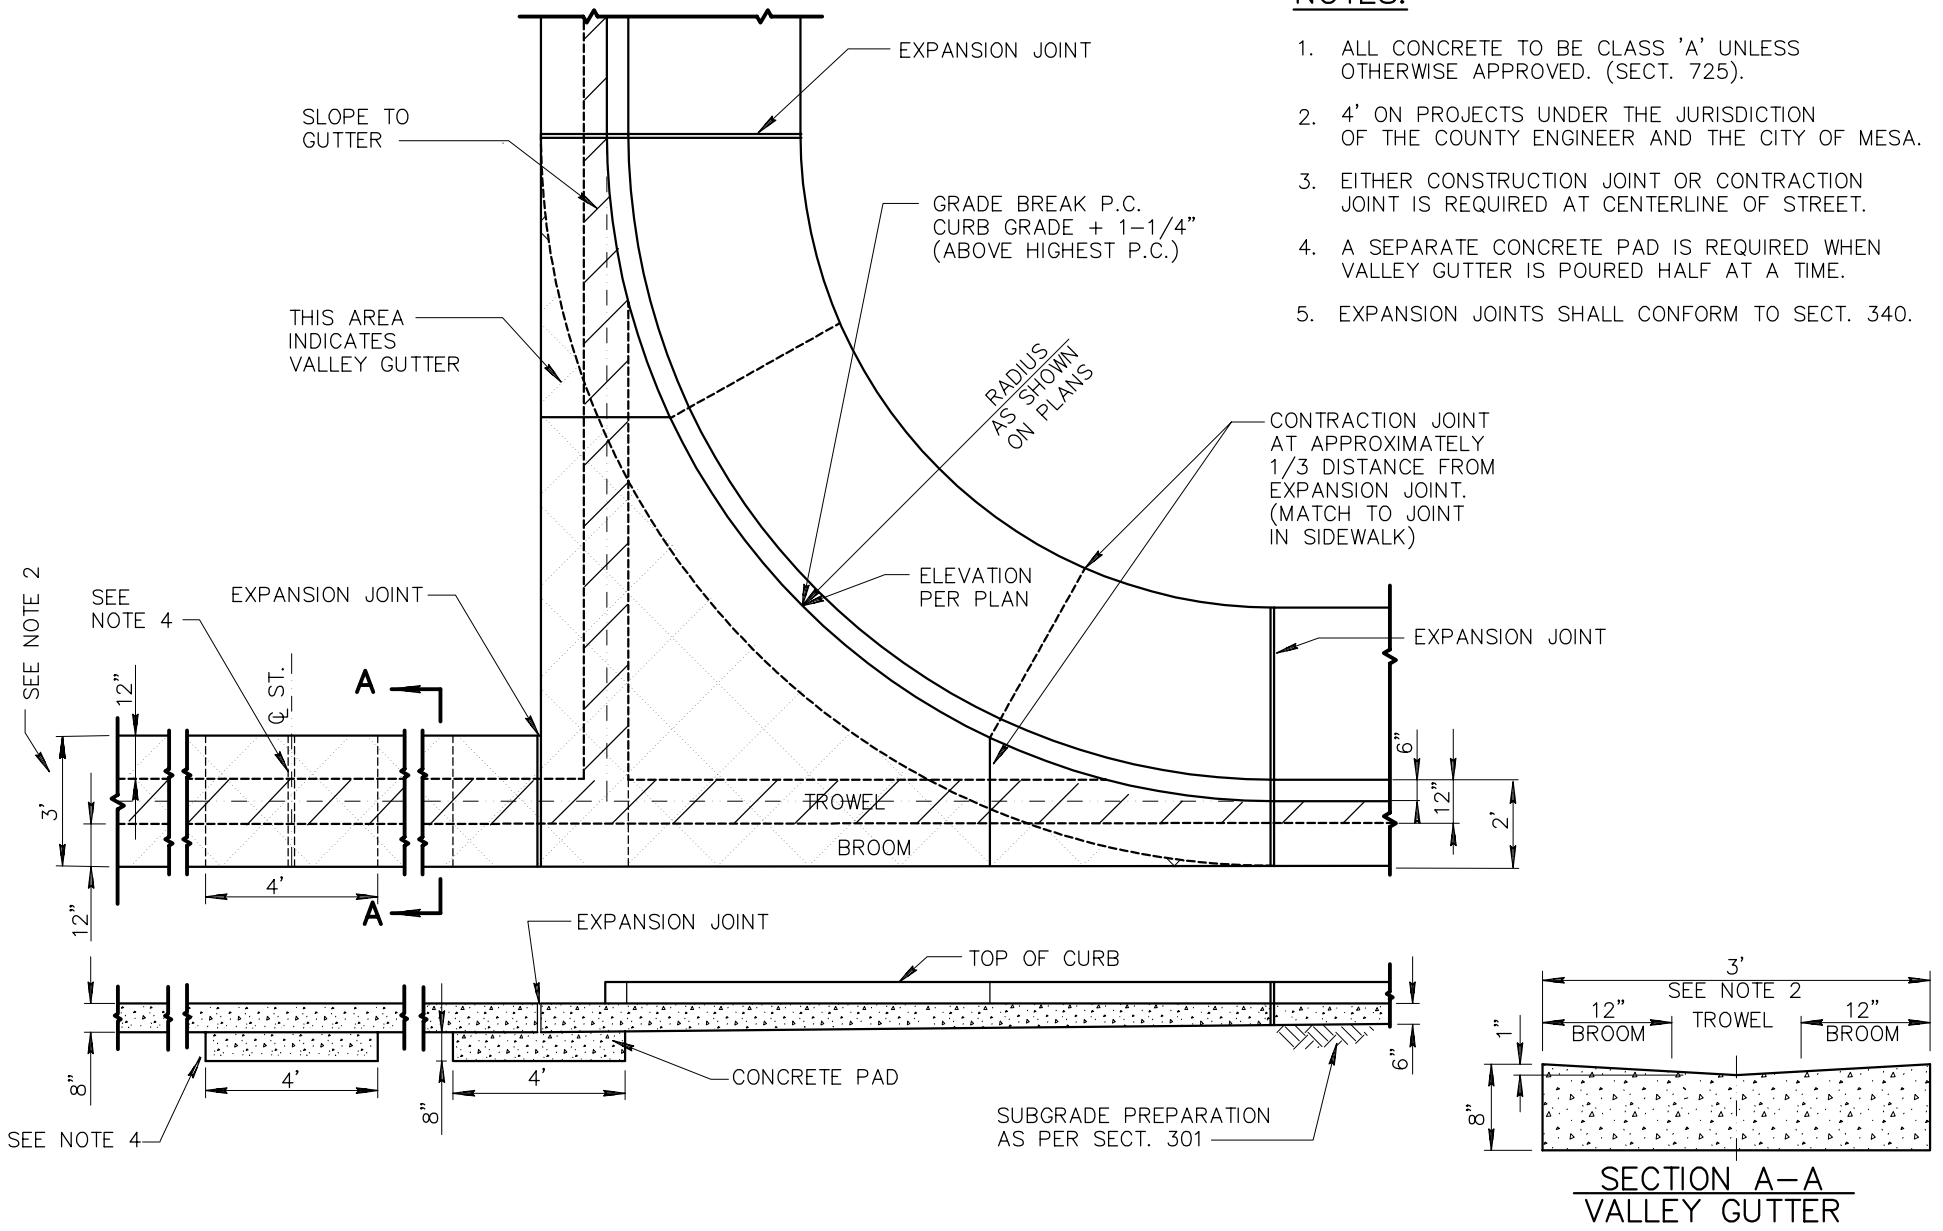

SECTION A–A
VALLEY GUTTER

DETAIL NO.			REVISED	DETAIL NO.
240	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	VALLEY GUTTER	01–01–2003	240

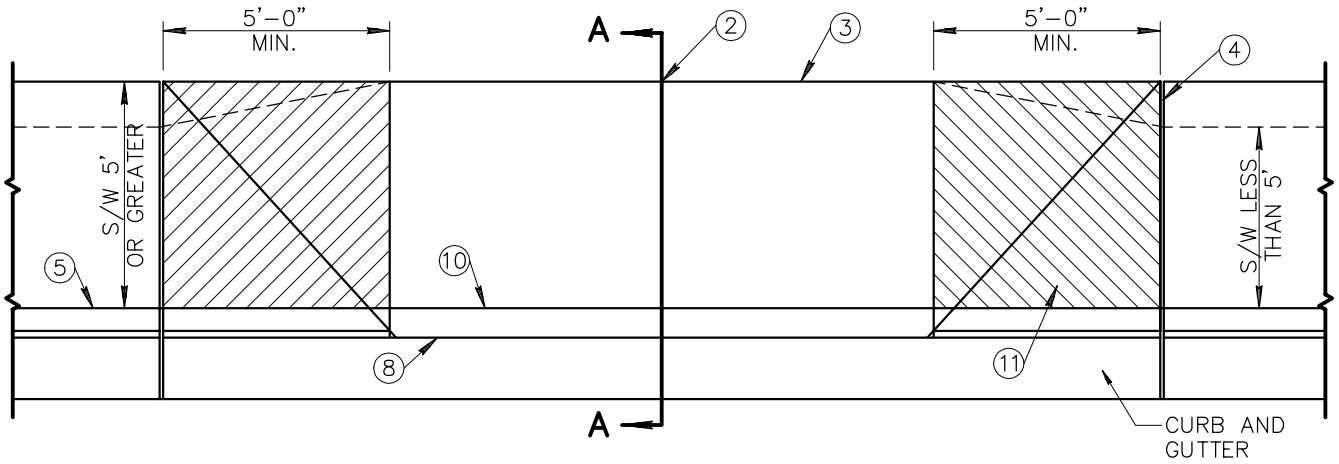

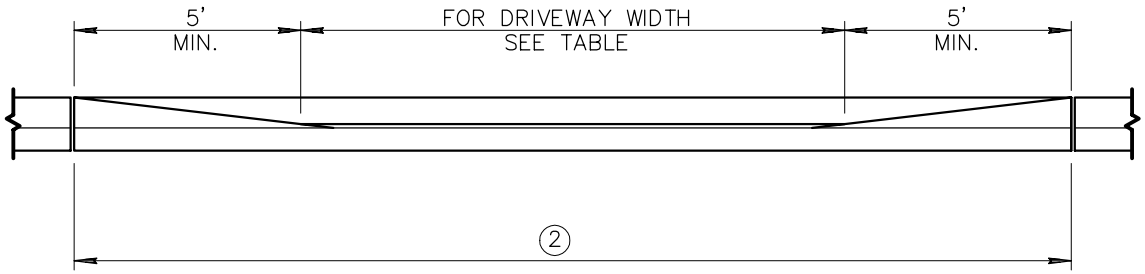

NOTES:

1. DEPRESSED CURB SHALL BE PAID FOR AT THE UNIT PRICE BID FOR THE TYPE OF CURB USED AT THAT LOCATION.
2. WHEN WIDTH EXCEEDS 22' PROVIDE A CONTRACTION JOINT ON D/W CENTERLINE.
3. BACK OF D/W OR FACE OF FUTURE S/W.
4. EXPANSION JOINTS SHALL COMPLY WITH SECTION 340.
5. BACK OF CURB – CONSTRUCTION JOINT OR SCORE MARK.
6. CLASS 'B' CONCRETE, SECT. 725.
7. SUBGRADE PREPARATION, SECT. 301.
8. FLOW LINE OF GUTTER.
9. DEPRESSED CURB.
10. SECT. A–A AND ELEVATION, D/W VERTICAL CURB AND GUTTER OR ROLL TYPE CURB AND GUTTER.
11. ROUGH BROOM FINISH FULL WIDTH OF 5' WARP SECTION, EACH SIDE OF DRIVEWAY.

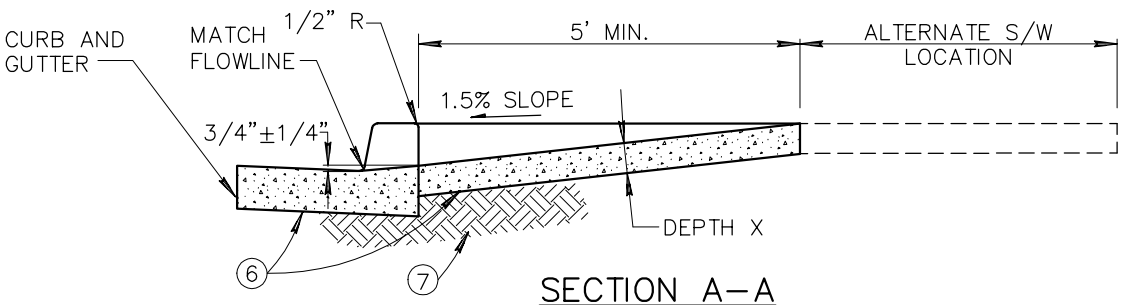

SECTION A–A

COMMERCIAL AND INDUSTRIAL				
DRIVEWAY WIDTH	MIN.	MAX.	CLASS	DEPTH X
COMMERCIAL	✳ 16'	40'	B	6"
INDUSTRIAL	✳ 16'	40'	B	6"
✳24' MIN. FOR TWO WAY TRAFFIC				

RESIDENTIAL				
DRIVEWAY WIDTH	MIN.	MAX.	CLASS	DEPTH X
MAJOR STREET	16'	30'	B	5"
COLLECTOR STREET	∗ 12'	30'	B	5"
LOCAL STREET	12'	30'	B	5"
∗16' DESIRABLE				

DETAIL NO.			REVISED	DETAIL NO.
250	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	DRIVEWAY ENTRANCES	01-01-2006	250

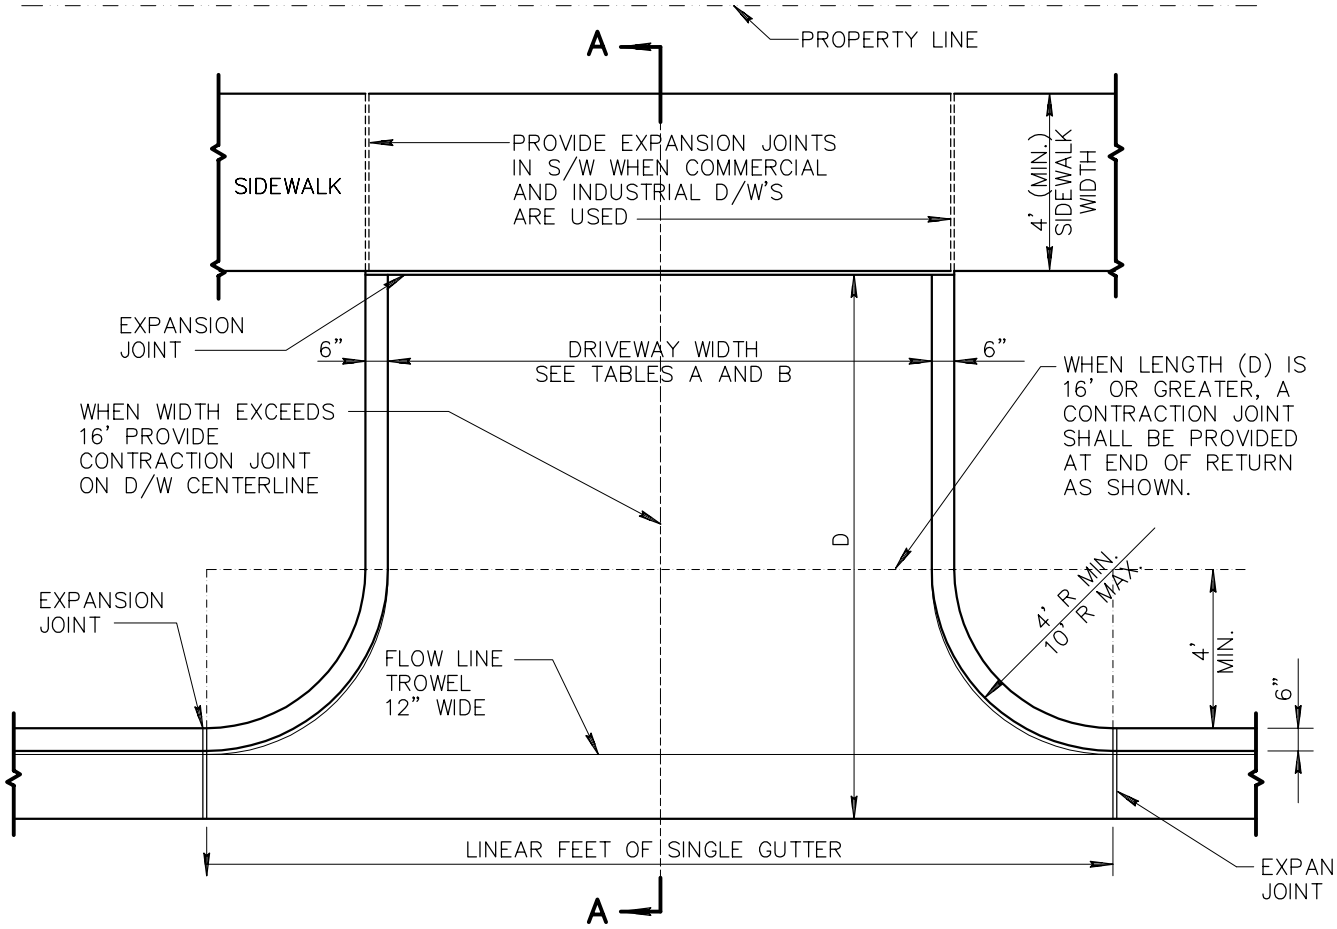

TABLE A		
ZONING COMMERCIAL AND INDUSTRIAL	DRIVEWAY WIDTH MIN.*	 MAX.
COMMERCIAL	16'	40'
INDUSTRIAL	16'	40'
* 24' WHERE 2-WAY TRAFFIC IS ANTICIPATED		

TABLE B		
ZONING RESIDENTIAL	DRIVEWAY WIDTH MIN.*	 MAX.
MAJOR STREET	16'	30'
COLLECTOR STREET	12'	30'
LOCAL STREET	12'	30'
* 16' WIDTH IS DESIRABLE		

NOTES:

1. EXPANSION JOINTS SHALL COMPLY TO SECTION 340.
2. THIS TYPE D/W TO BE USED ONLY UPON APPROVAL OF ENGINEER.
3. CLASS 'B' CONCRETE CONSTRUCTION AS PER SECT. 725

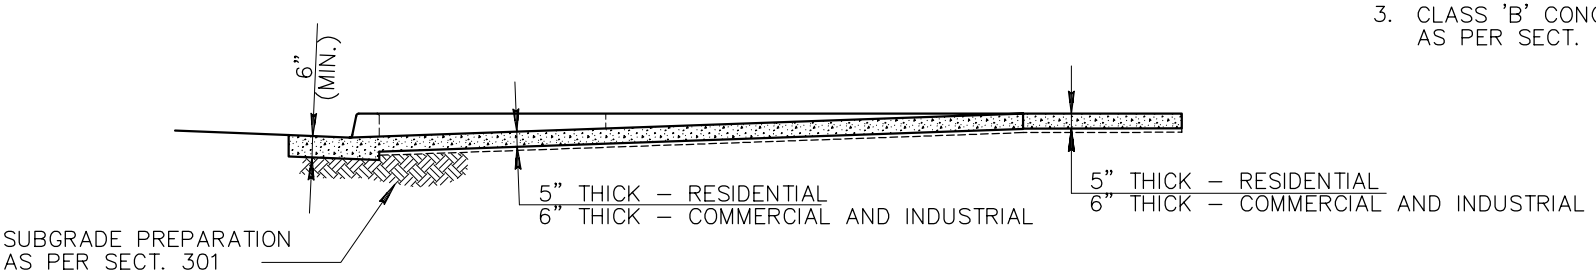

SECTION A-A

DETAIL NO.			REVISED	DETAIL NO.
251	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	RETURN TYPE DRIVEWAYS	01-01-2003	251

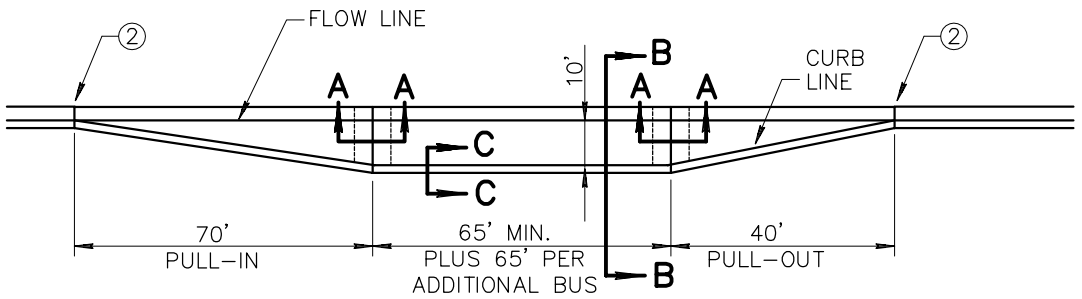

DETAIL

NOTES:

1. SUFFICIENT RIGHT-OF-WAY MUST BE AVAILABLE TO CONSTRUCT THE BUS BAY.
2. 1/2" BITUMINOUS PREFORMED EXPANSION JOINT FILLER ASTM D-1751 PER SPECIFICATION SECTION 729.
3. SUBGRADE PREPARATION PER SPECIFICATION SECTION 301 COMPACTED TO 95% MINIMUM DENSITY.
4. CONCRETE SHALL BE CLASS 'A' PER SPECIFICATION SECTION 725.
5. CONCRETE BUS BAY PAVEMENT SHALL BE BROOM FINISHED, EXCEPT WHERE OTHERWISE NOTED.
6. CONTRACTION JOINTS IN THE BUS BAY PAVEMENT SHALL MATCH THOSE IN THE CURB, 15 FT. MAXIMUM SPACING.
7. CONCRETE BEARING PAD (SECTION A-A) TO BE POURED SEPARATELY FROM CONCRETE BUS BAY PAVEMENT.

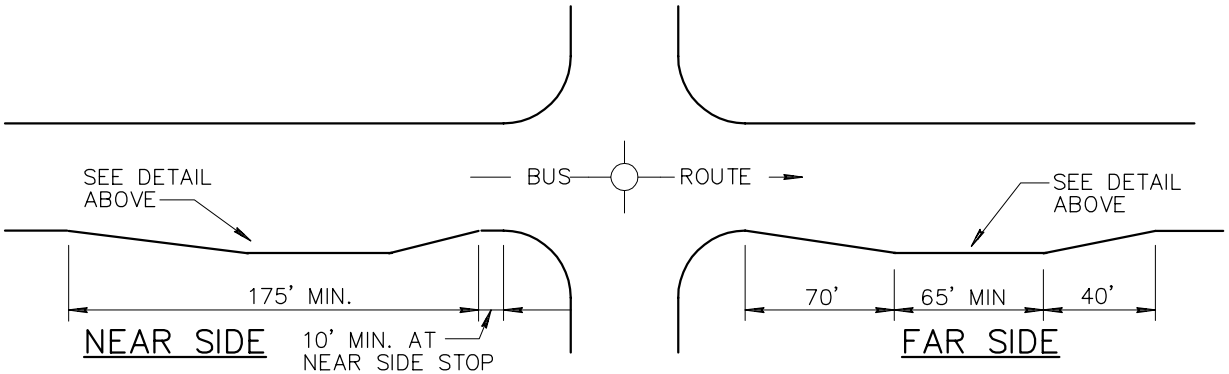

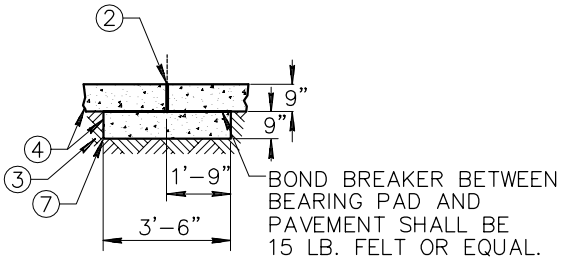

SECTION A-A

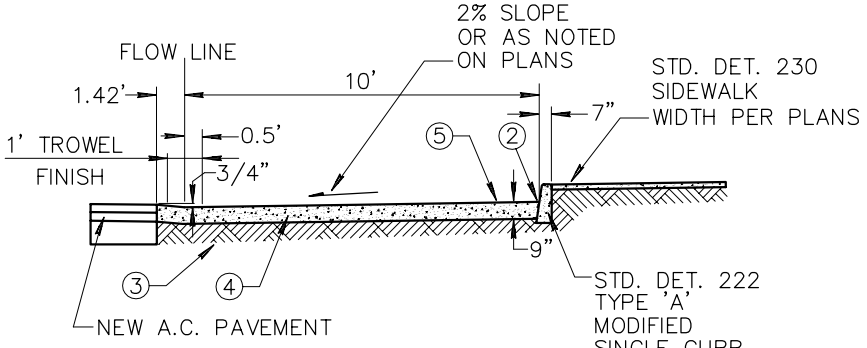

SECTION B-B

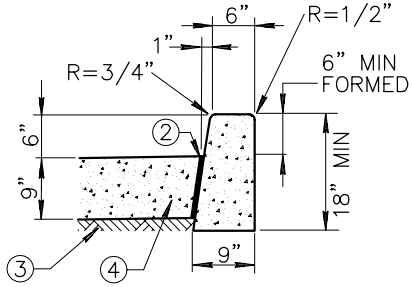

SECTION C-C

STD. DET. 222 TYPE 'A' MODIFIED SINGLE CURB

DETAIL NO.			REVISED	DETAIL NO.
252	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**BUS BAYS**	01-01-2005	252

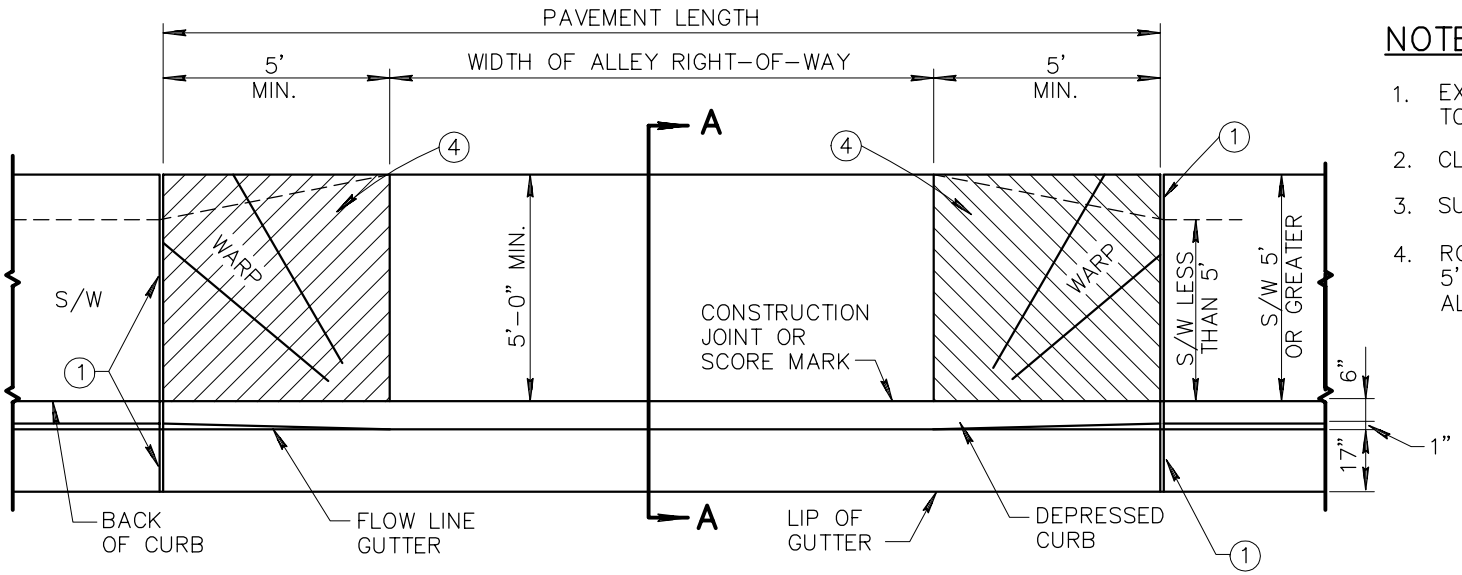

NOTES:

1. EXPANSION JOINTS SHALL CONFORM TO SECTION 340.
2. CLASS 'B' CONCRETE, PER SECT. 725.
3. SUBGRADE PREPARATION, PER SECT. 301.
4. ROUGH BROOM FINISH FULL WIDTH OF 5' WARP SECTION, EACH SIDE OF ALLEY ENTRANCE.

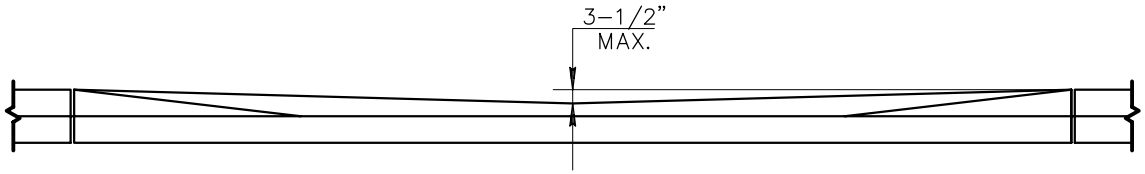

ELEVATION

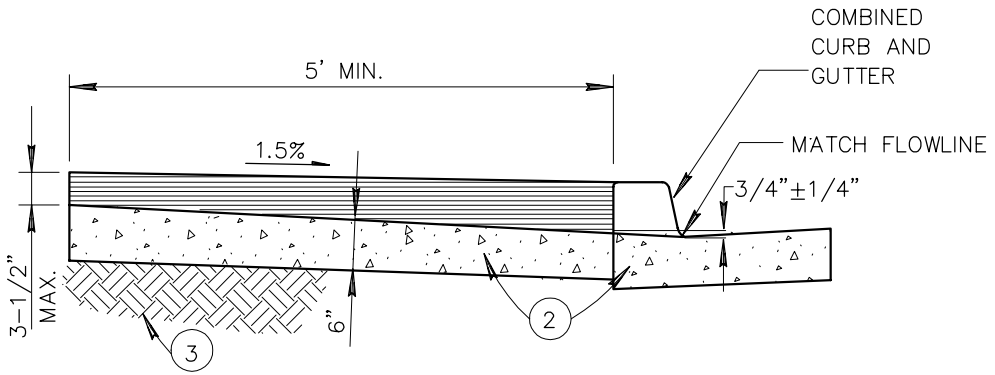

SECTION A-A

DETAIL NO.			REVISED	DETAIL NO.
260	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**ALLEY ENTRANCE (WITH COMBINED CURB AND GUTTER)**	01-01-2006	260

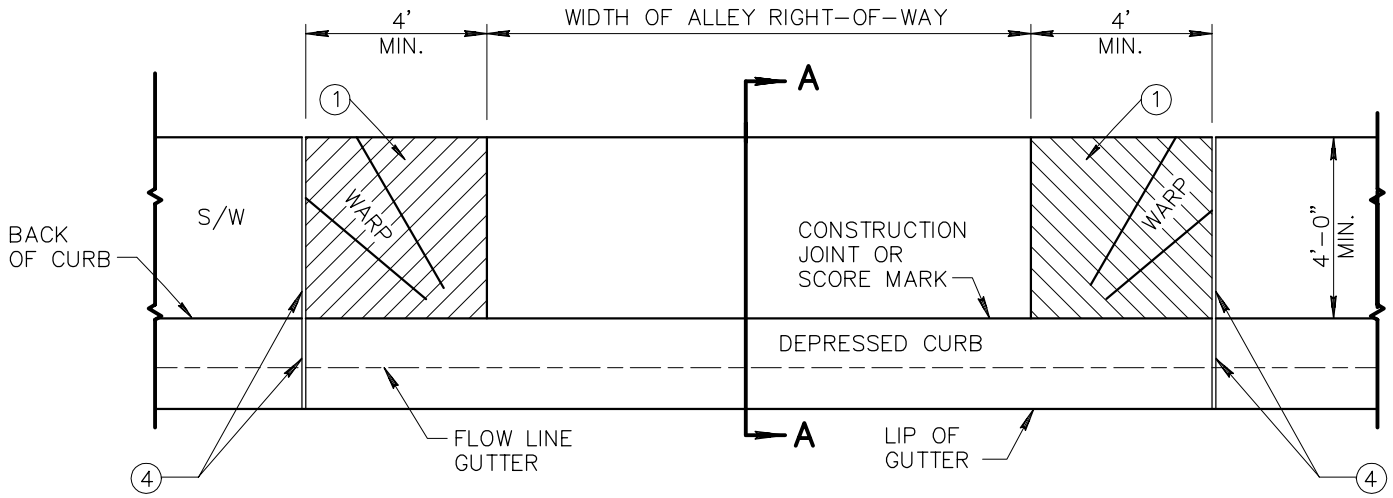

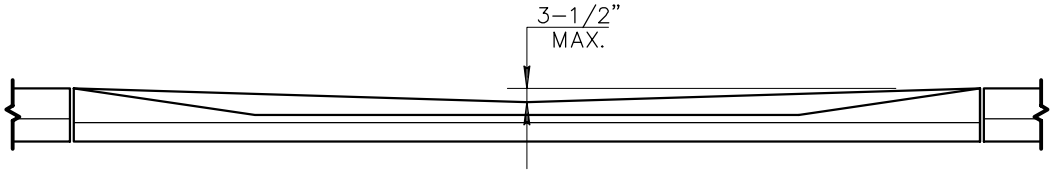

ELEVATION

NOTES:

1. ROUGH BROOM FINISH FULL WIDTH OF 4' WARP SECTION, EACH SIDE OF ALLEY ENTRANCE.
2. CLASS 'B' CONCRETE CONSTRUCTION PER SECT. 725.
3. SUBGRADE PREPARATION, PER SECT. 301.
4. EXPANSION JOINTS SHALL CONFORM TO SECT. 340.

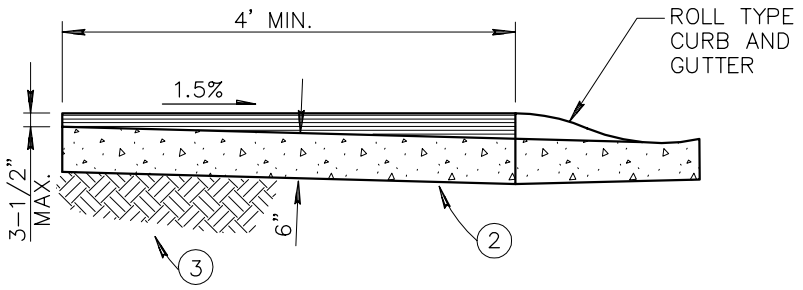

SECTION A-A

DETAIL NO.			REVISED	DETAIL NO.
261	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	ALLEY ENTRANCE (WITH ROLL TYPE CURB AND GUTTER)	01-01-2006	261

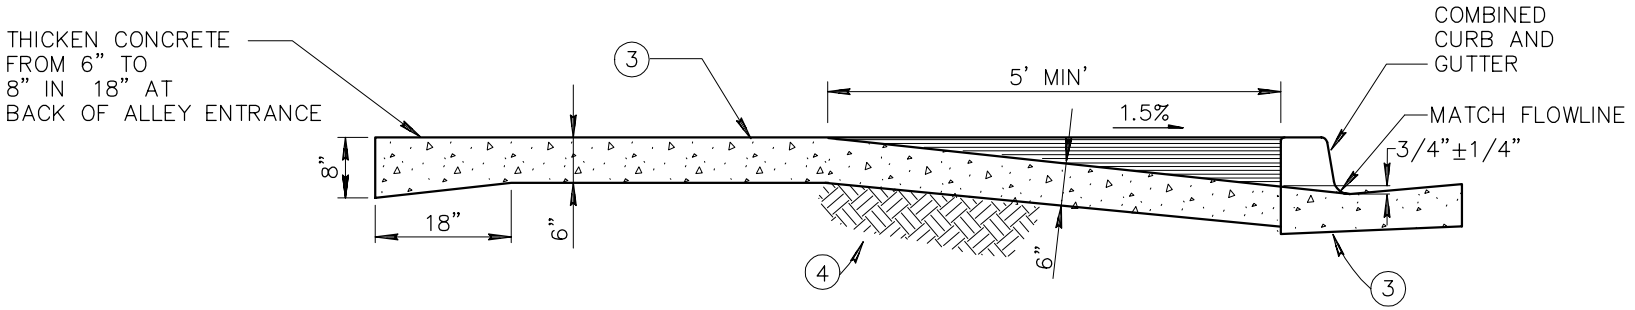

SECTION A–A

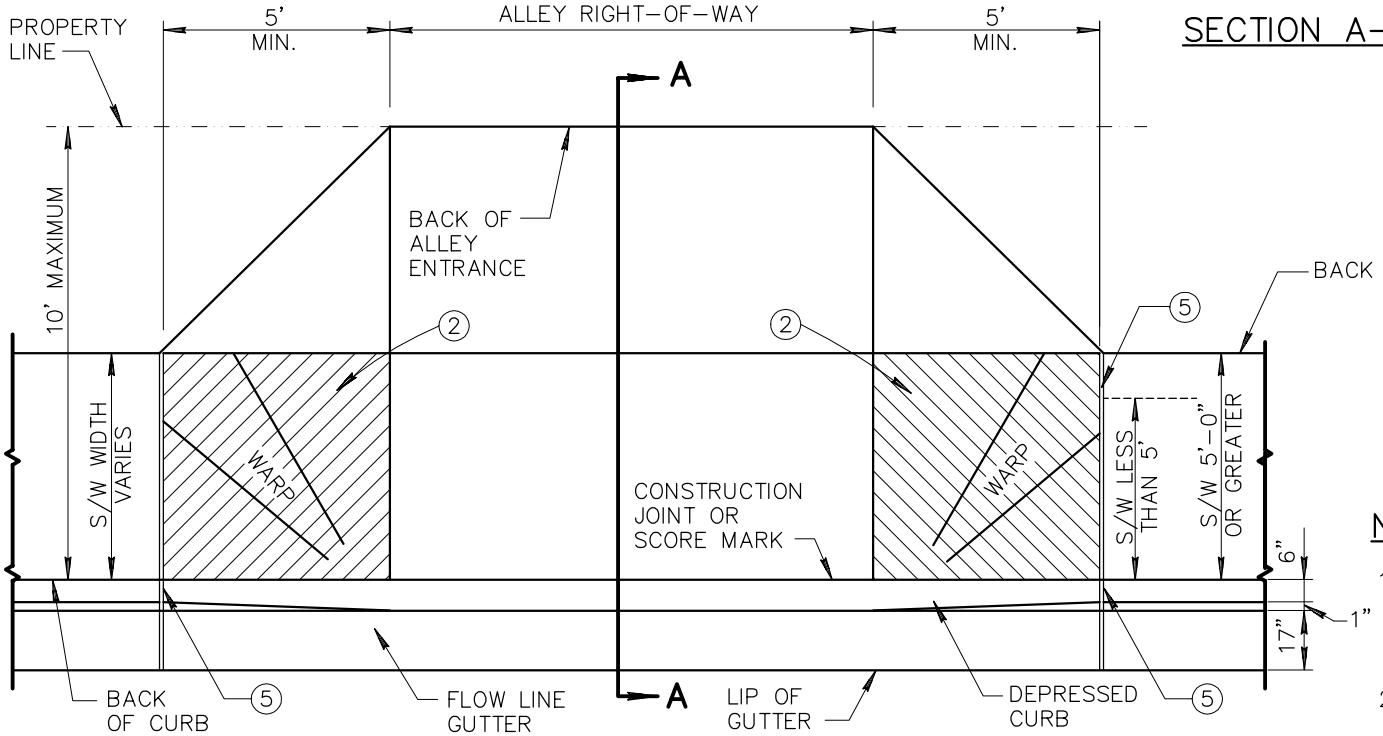

PLAN

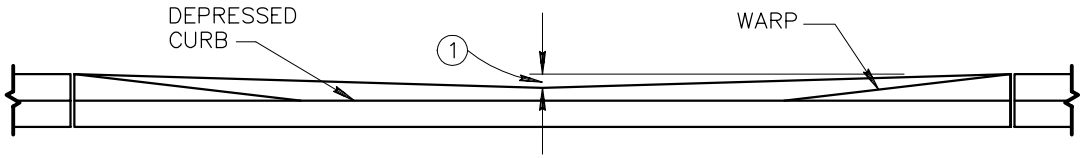

ELEVATION

NOTES:

1. IF ALLEY ENTRANCE IS USED FOR DRAINAGE, THE CENTER BACK OF ALLEY ENTRANCE MAY BE DEPRESSED 2" FOR 4" CURB OR 3" FOR 6" CURB.
2. ROUGH BROOM FINISH FULL WIDTH OF 5' WARP SECTION, EACH SIDE SIDE OF ALLEY ENTRANCE.
3. CLASS 'B' CONCRETE CONSTRUCTION PER SECT. 725.
4. SUBGRADE PREPARATION, PER SECT. 301.
5. EXPANSION JOINTS SHALL CONFORM TO SECTION 340.

DETAIL NO.			REVISED	DETAIL NO.
262	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	WING TYPE ALLEY ENTRANCE (WITH COMBINED CURB AND GUTTER)	01–01–2006	262

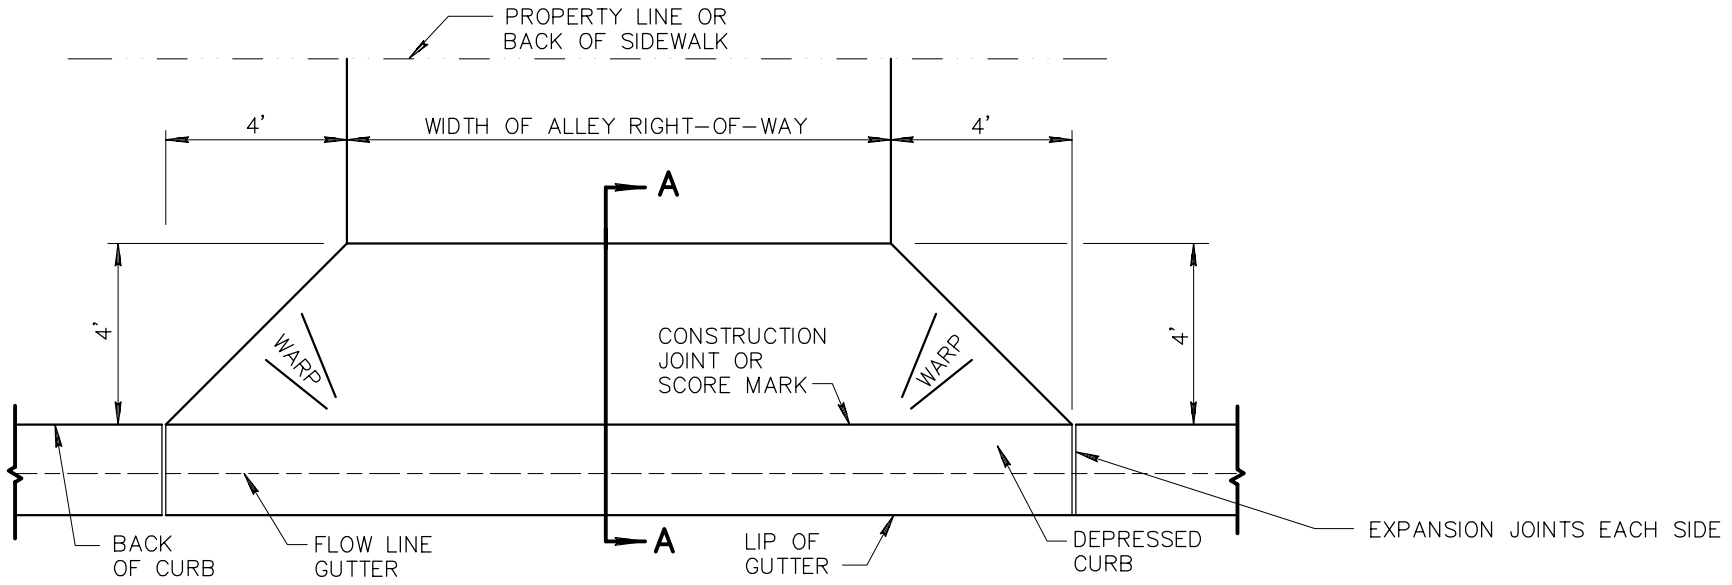

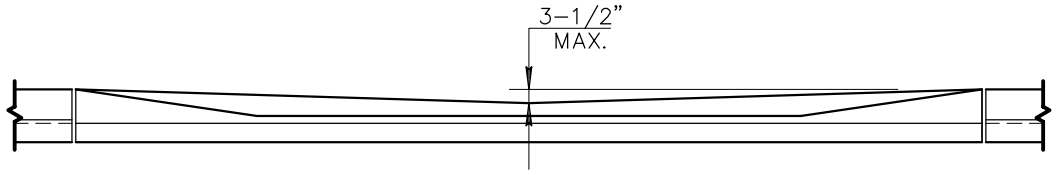

ELEVATION

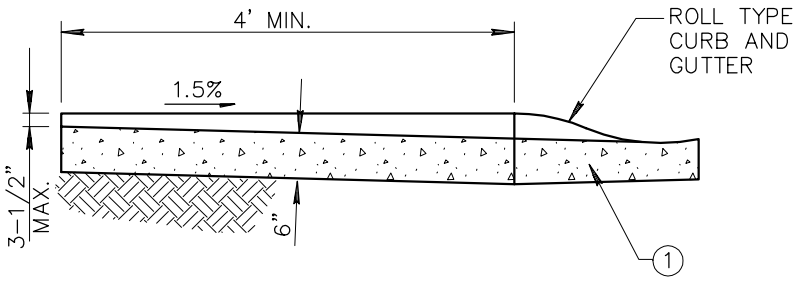

SECTION A-A

NOTES:

1. CLASS 'B' CONCRETE CONSTRUCTION PER SECT. 725.
2. EXPANSION JOINTS SHALL CONFORM TO SECT. 340.
3. SUBGRADE PREPARATION PER SECTION 301.

DETAIL NO.			REVISED	DETAIL NO.
263	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**WING TYPE ALLEY ENTRANCE (WITH ROLL TYPE CURB AND GUTTER)**	01-01-2002	263

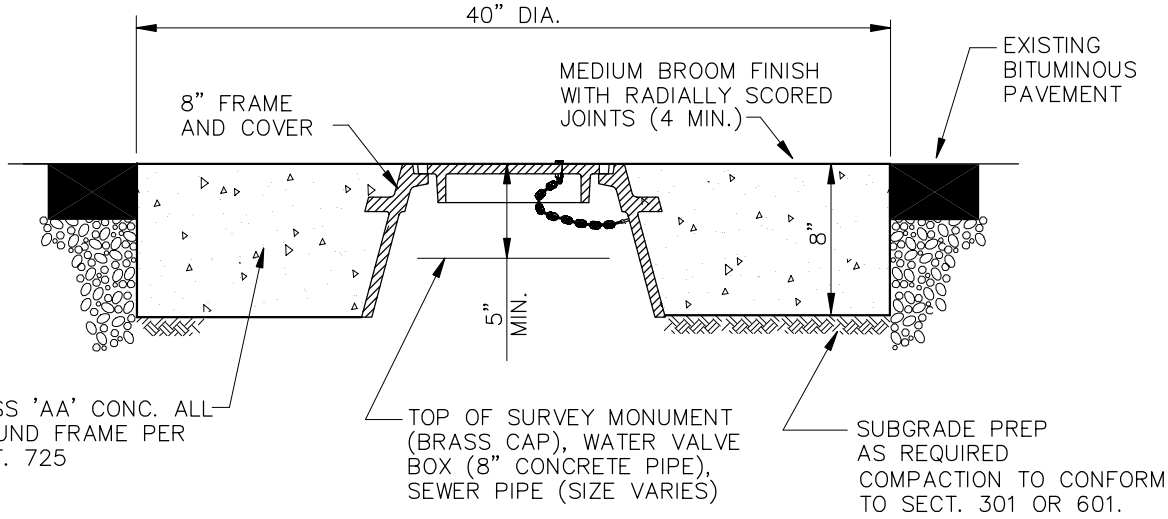

WATER VALVE, SURVEY MONUMENT, OR SEWER CLEAN OUT FRAME & GRADE ADJUSTMENT

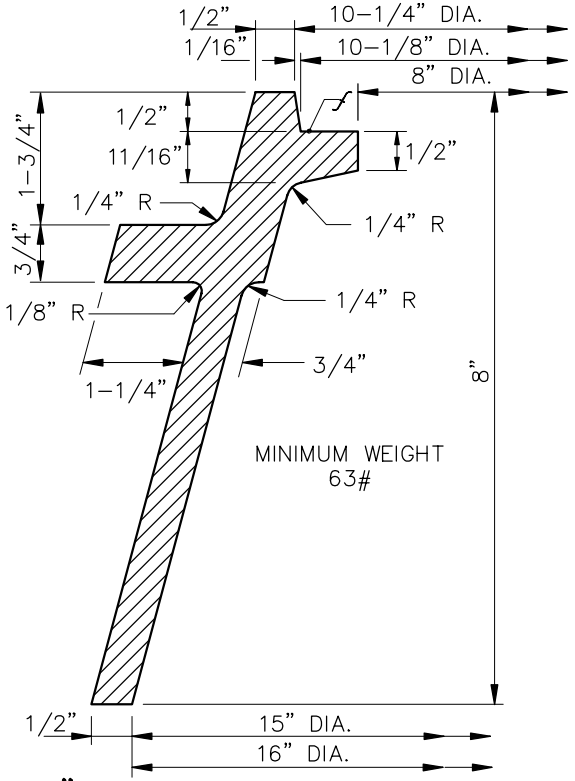

8" C.I. FRAME AND COVER

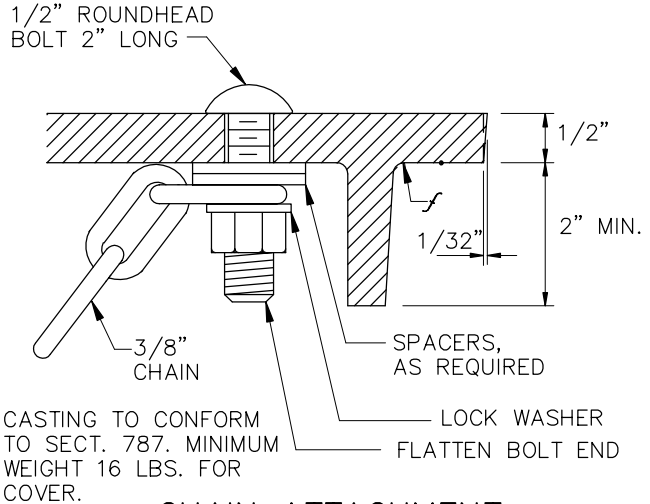

CHAIN ATTACHMENT

(AS REQUIRED)

LETTERS ON COVER TO BE AS FOLLOWS:
"SEWER", "WATER", OR "SURVEY" AS DIRECTED
TOTAL WIDTH OF WORD "SEWER" OR "WATER"
3-3/4". TOTAL WIDTH OF WORD "SURVEY"
4-1/2". LETTER SIZE 5/8" x 3/4", RAISED 1/16"
ABOVE LEVEL OF COVER, TYPE OF LETTERS
TO BE SUBMITTED FOR APPROVAL.

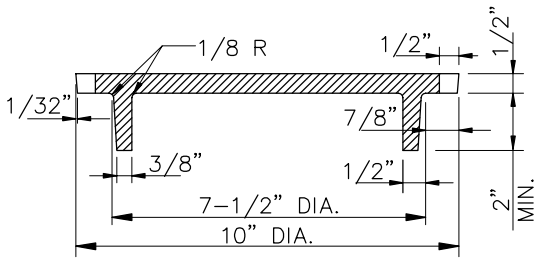

COVER SECTION A-A

DETAIL TYPICAL
FOR BOTH FRAME
AND COVER

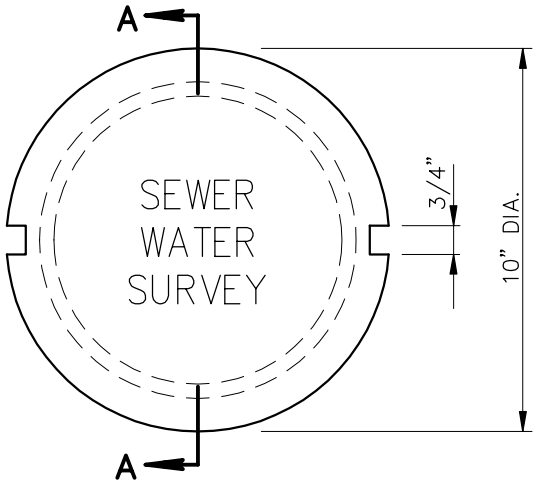

DETAIL NO.			REVISED	DETAIL NO.
270	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	FRAME AND COVER	01-01-2001	270

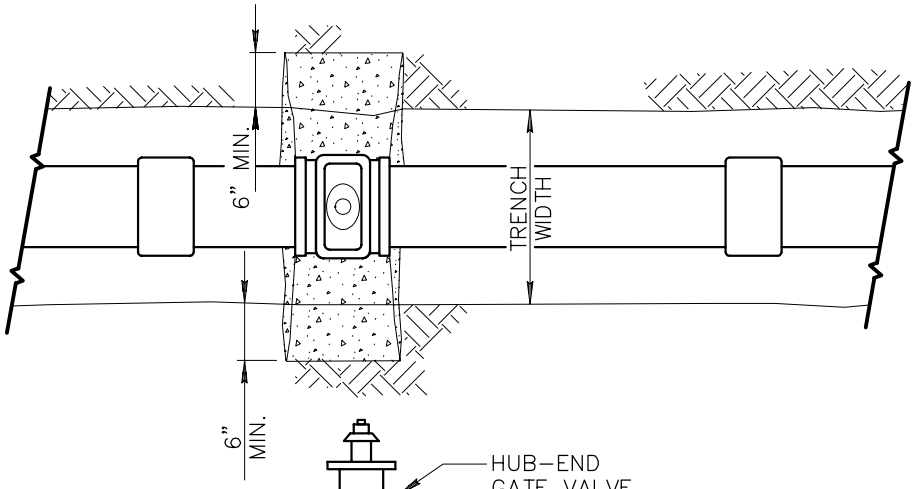

CLASS 'C' CONCRETE AS PER SECT. 725
FORM AS REQUIRED TO KEEP CLEAR OF JOINTS.

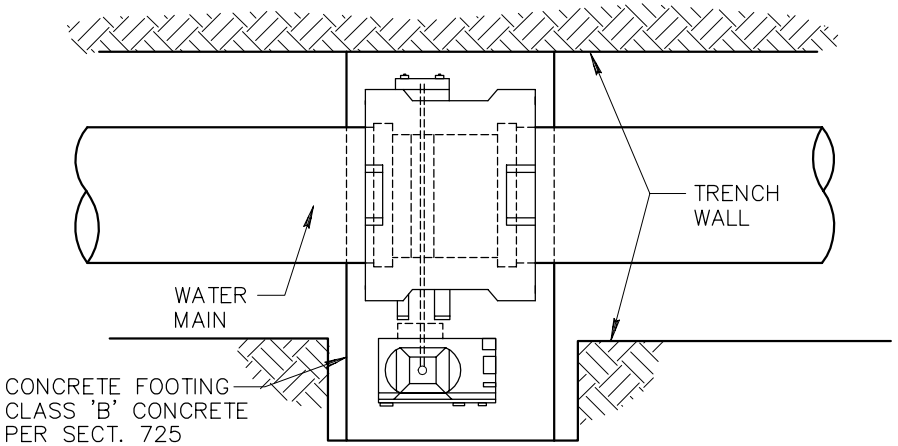

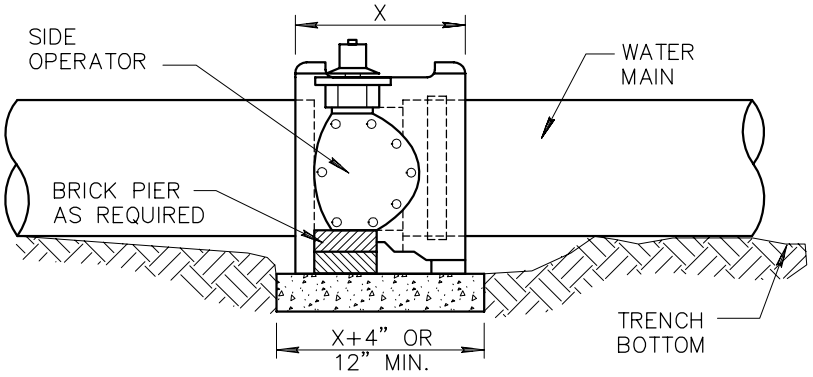

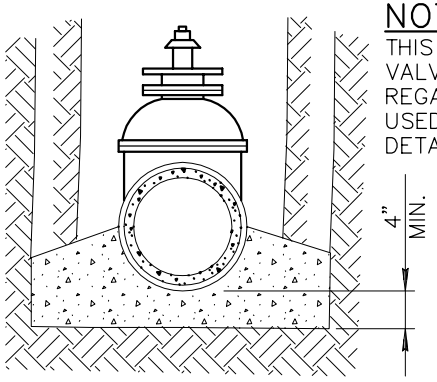

NOTE:

THIS DETAIL COVERS WATER GATE VALVES, 4" TO 12" INCLUSIVE REGARDLESS OF TYPE OF PIPE USED. LARGER LINES TO BE DETAILED ON PLANS.

WATER GATE VALVE

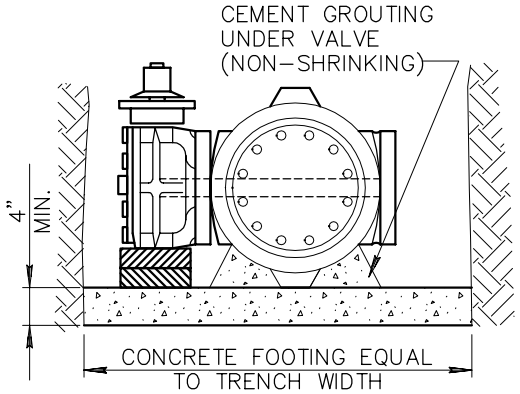

NOTES:

1. THIS DETAIL COVERS BUTTERFLY VALVE INSTALLATION, 3" TO 12" INCLUSIVE, REGARDLESS OF TYPE OF PIPE OR JOINT USED. LARGER LINES TO BE DETAILED ON PLANS.
2. VALVE BOX AND COVER REQUIRED PER DETAILS 270 AND 391.

BUTTERFLY VALVE

DETAIL NO.			REVISED	DETAIL NO.
301	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	BLOCKING FOR WATER GATE AND BUTTERFLY VALVES		301

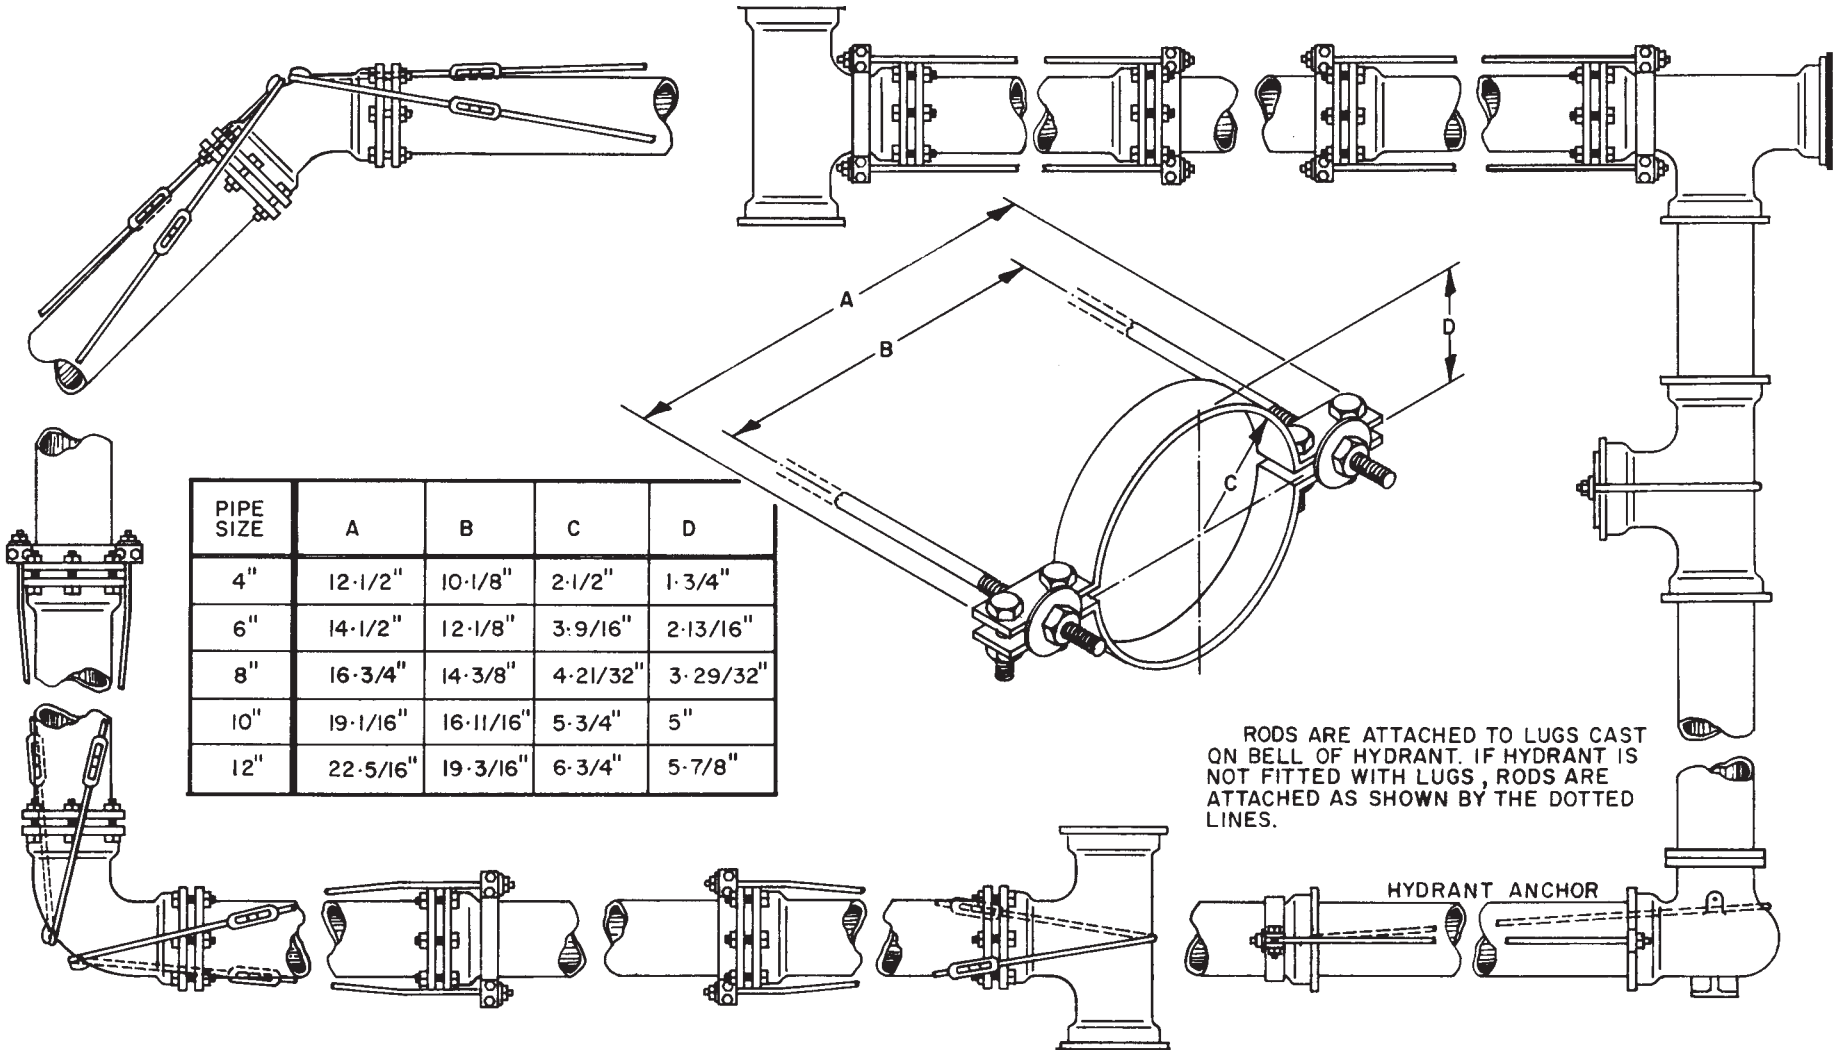

PIPE SIZE	A	B	C	D
4"	12-1/2"	10-1/8"	2-1/2"	1-3/4"
6"	14-1/2"	12-1/8"	3-9/16"	2-13/16"
8"	16-3/4"	14-3/8"	4-21/32"	3-29/32"
10"	19-1/16"	16-11/16"	5-3/4"	5"
12"	22-5/16"	19-3/16"	6-3/4"	5-7/8"

DETAIL NO.			REVISED	DETAIL NO.
302-1	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	JOINT RESTRAINT WITH TIE RODS		302-1

THIS DETAIL IS FOR USE ONLY ON UNDERGROUND INSTALLATIONS WHERE THE USE OF CONCRETE THRUST BLOCKING PER DETAIL 380 CANNOT BE USED BECAUSE OF OBSTRUCTIONS, OR REQUIREMENTS OF THE SPECIFICATIONS...

* CLAMPS SHALL BE 1/2 BY 2 INCHES FOR PIPE 4 AND 6 INCHES IN DIAMETER; 5/8 BY 2–1/2 INCHES FOR PIPE 8 AND 10 INCHES; 5/8 BY 3 INCHES FOR PIPE 12 INCHES. BOLT HOLES SHALL BE 1/16 INCH IN DIAMETER LARGER THAN BOLTS.
* RODS SHALL BE 3/4 INCHES IN DIAMETER FOR PIPES 4,6 AND 8 INCHES IN DIAMETER; 7/8 INCHES FOR PIPE 10 INCHES AND 1 INCH IN DIAMETER FOR PIPE 12 INCHES.
* BOLTS SHALL BE 5/8 INCHES IN DIAMTER FOR PIPE 4, 6 AND 8 INCHES IN DIAMETER; 3/4 INCHES FOR PIPE 10 INCHES AND 7/8 INCHES IN DIAMETER FOR PIPE 12 INCHES
* WASHERS MAY BE CAST IRON OR STEEL, ROUND OR SQUARE, DIMENSIONS FOR CAST IRON WASHERS ARE 5/8 BY 3 INCHES FOR PIPE 4, 6, 8 AND 10 INCHES IN DIAMETER AND 3/4 BY 3–1/2 INCHES FOR PIPE 12 INCHES. DIMENSIONS FOR STEEL WASHERS ARE 1/2 BY 3 INCHES FOR PIPE 4, 6, 8 AND 10 INCHES IN DIAMETER AND 1/2 BY 3–1/2 INCHES FOR PIPE 12 INCHES IN DIAMTER. HOLES SHALL BE 1/8 INCH LARGER THAN THE RODS.

FOR PIPE LARGER THAN 12 INCHES IN DIAMETER, RESTRAINT DETAILS SHALL BE SUBMITTED FOR APPROVAL PRIOR TO INSTALLATION.

1. ALL TIE RODS, ROD COUPLINGS, TURNBUCKLES, BOLTS AND NUTS FOR THESE JOINTS SHALL BE OF CARBON STEEL EQUIVALENT TO A.S.T.M. A–307, GRADE B, WITH CADMIUM PLATING IN ACCORDANCE WITH A.S.T.M. A–165. EXCEPT THAT THE MIN. THICKNESS OF THE PLATING SHALL BE .0002 OF AN INCH. CADMIUM PLATED BOLTS SHALL HAVE CLASS 2A THREADS AND THE NUTS, ROD COUPLINGS AND TURNBUCKLES SHALL HAVE 2B THREADS.

2. HIGH STRENGTH, HEAT TREATED CAST IRON TEE–HEAD BOLTS WITH HEXAGON NUTS, ALL IN ACCORDANCE WITH THE STRENGTH REQUIREMENTS OF A.W.W.A. C–111, MAY BE USED IN LIEU OF THE CADMIUM PLATED BOLTS AND NUTS.

3. THE SKETCHES IN THIS SERIES OF FIGURES SHOW ACCEPTABLE METHODS OF PROVIDING ANCHORAGE. THERE IS NO PARTICULAR SIGNIFICANCE TO BE ATTACHED TO WHETHER THE SKETCH SHOWS A BELL AND SPIGOT JOINT OR A STANDARD MECHANICAL JOINT. THE ANCHORING PROCEDURE ILLUSTRATED APPLIES IN MOST CASES TO EITHER TYPE OF JOINT. IN SOME CASES, DIMENSIONS OF THE PARTICULAR PIPE OR HUB AND SPACE AVAILABLE FOR WORKING AROUND THE PARTICULAR JOINT WILL INFLUENCE THE CHOICE OF METHODS USED.

4. IN CERTAIN ASSEMBLIES OF RODS AND CLAMPS SHOWN, RODS RUN FROM A LUG ON THE FITTING (OR A CLAMP BEHIND THE HUB OF A BELL) TO A CLAMP AGAINST A FACE OF A BELL. NOTE THAT THIS ARRANGEMENT ANCHORS ONLY ONE JOINT. THE STABILITY OF THE JOINT WHERE THE CLAMP IS AGAINST THE FACE OF THE BELL DEPENDS ON HAVING SOIL ABOVE A RELATIVELY LONG PIECE OF PIPE ON BOTH SIDES OF THE JOINT. CONSEQUENTLY, IF THE DISTANCE BETWEEN THE FIRST AND SECOND JOINTS IS LESS THAN 12 FEET, THE SECOND JOINT SHOWN SHALL BE ANCHORED BY A CLAMP BEHIND THE HUB OF THE BELL AND RODS TO A CLAMP AT THE FACE OF THE NEXT BELL.

5. COATING TYPE: A.H.D. ASPHALTIC PRIMER 719(A). – ALL EXPOSED METAL.

DETAIL NO.			REVISED	DETAIL NO.
302-2	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	JOINT RESTRAINT WITH TIE RODS		302-2

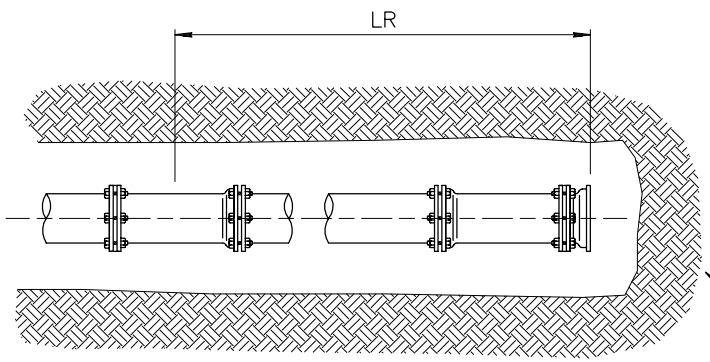

DEAD ENDS

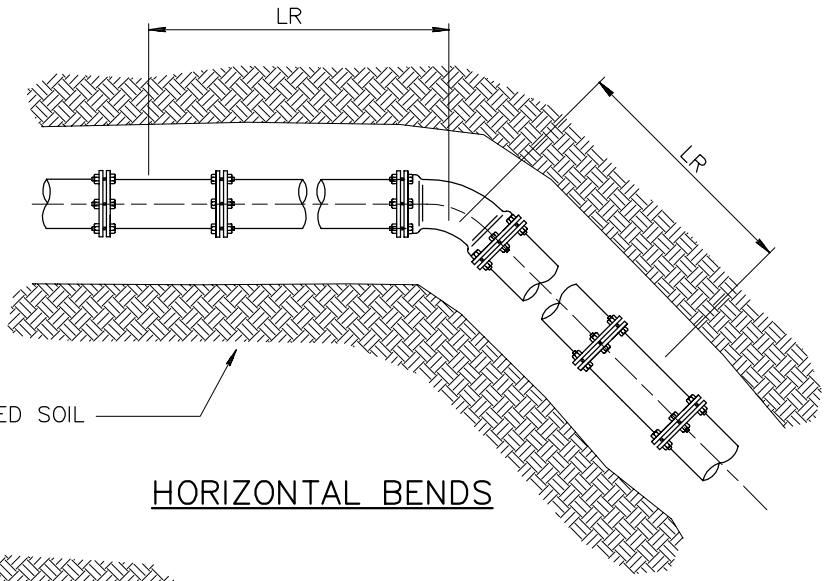

HORIZONTAL BENDS

UNDISTURBED SOIL

LRN = SHORTEST LENGTH OF PIPE RESTRAINED TO THE RUN OF THE TEE FITTING (BOTH SIDES OF TEE).

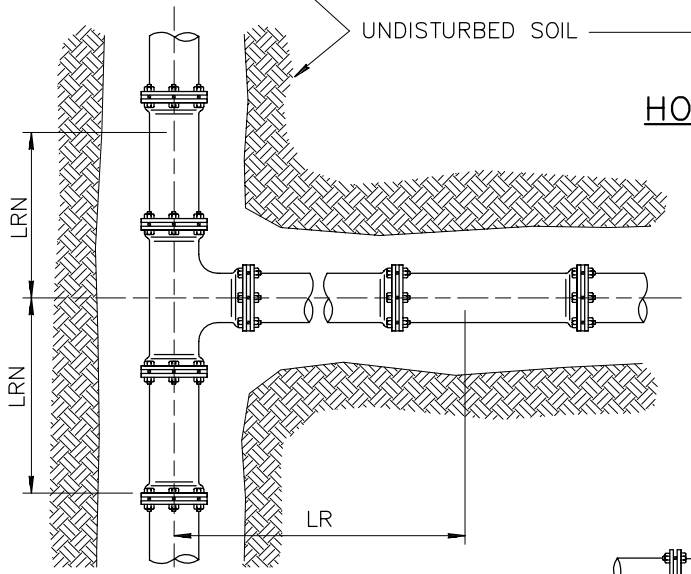

TEES

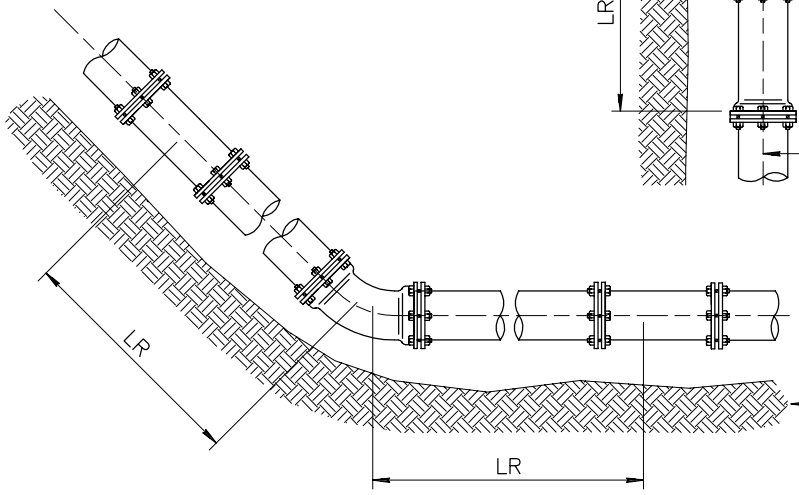

VERTICAL UP BEND

UNDISTURBED SOIL

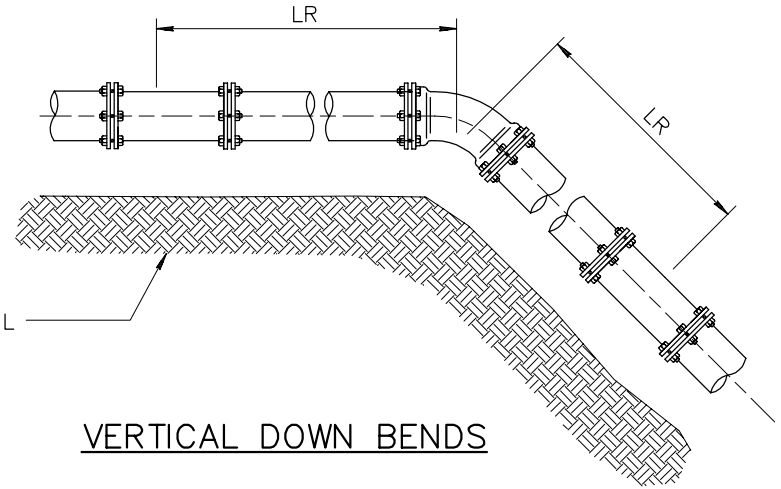

VERTICAL DOWN BENDS

DETAIL NO.				REVISED	DETAIL NO.
303-1	MARICOPA ASSOCIATION of GOVERNMENTS	STANDARD DETAIL ENGLISH	JOINT RESTRAINT FOR DUCTILE IRON AND POLYETHYLENE WRAPPED DUCTILE IRON WATER PIPES		303-1

RESTRAINED LENGTHS, LR, FOR DUCTILE IRON PIPE

NOMINAL PIPE SIZE INCHES	HORIZONTAL BENDS			TEES		VERTICAL OFFSETS						DEAD ENDS
						90° BEND FITTINGS		45° BEND FITTINGS		22-1/2° BEND FITTINGS		
	90°	45°	22-1/2°	LRN=0'	LRN=10'	DOWN BEND	UP BEND	DOWN BEND	UP BEND	DOWN BEND	UP BEND	
4	18	7	4	30	8	31	18	13	7	6	3	31
6	25	10	5	43	20	44	25	18	10	9	5	44
8	32	13	6	56	34	58	32	24	13	11	6	58
10	38	16	8	68	45	69	38	29	16	14	8	69
12	45	19	9	80	57	81	45	34	19	16	9	81
14	51	21	10	91	68	92	51	38	21	18	10	92
16	57	24	11	103	79	104	57	43	24	21	11	104
18	62	26	12	113	90	115	62	48	26	23	12	115
20	68	28	14	125	100	126	68	52	28	25	14	126
24	79	33	16	145	121	147	79	61	33	29	16	147

RESTRAINED LENGTHS, LR, FOR DUCTILE IRON PIPE WITH POLYETHYLENE WRAP

NOMINAL PIPE SIZE INCHES	HORIZONTAL BENDS			TEES		VERTICAL OFFSETS						DEAD ENDS
						90° BEND FITTINGS		45° BEND FITTINGS		22-1/2° BEND FITTINGS		
	90°	45°	22-1/2°	LRN=0'	LRN=10'	DOWN BEND	UP BEND	DOWN BEND	UP BEND	DOWN BEND	UP BEND	
4	26	11	5	69	18	72	26	30	11	14	5	72
6	36	15	7	99	47	102	36	42	15	20	7	102
8	47	19	9	130	78	133	47	55	19	26	9	133
10	56	23	11	157	103	159	56	66	23	32	11	159
12	65	27	13	185	131	187	65	77	27	37	13	187
14	74	31	15	211	156	214	74	89	31	42	15	214
16	82	34	16	238	183	241	82	100	34	48	16	241
18	90	37	18	263	207	266	90	110	38	53	18	266
20	98	41	20	289	233	292	98	121	41	58	20	292
24	113	47	22	337	280	340	113	141	47	68	22	340

NOTES:

1. ALL JOINTS WITHIN THE SPECIFIED LENGTH LR MUST BE RESTRAINED. ALL LENGTHS ARE GIVEN IN FEET.
2. THE MAXIMUM TEST PRESSURE SHALL NOT EXCEED 200 PSI
3. THE MINIMUM DEPTH OF BURY SHALL BE 3' TO TOP OF PIPE.
4. RESTRAINED LENGTHS MAY BE REDUCED WHEN SUPPORTED BY ENGINEERING CALCULATIONS.

DETAIL NO.		STANDARD DETAIL		REVISED	DETAIL NO.
303-2	MARICOPA ASSOCIATION of GOVERNMENTS	ENGLISH	JOINT RESTRAINT FOR DUCTILE IRON AND POLYETHYLENE WRAPPED DUCTILE IRON WATER PIPES		303-2

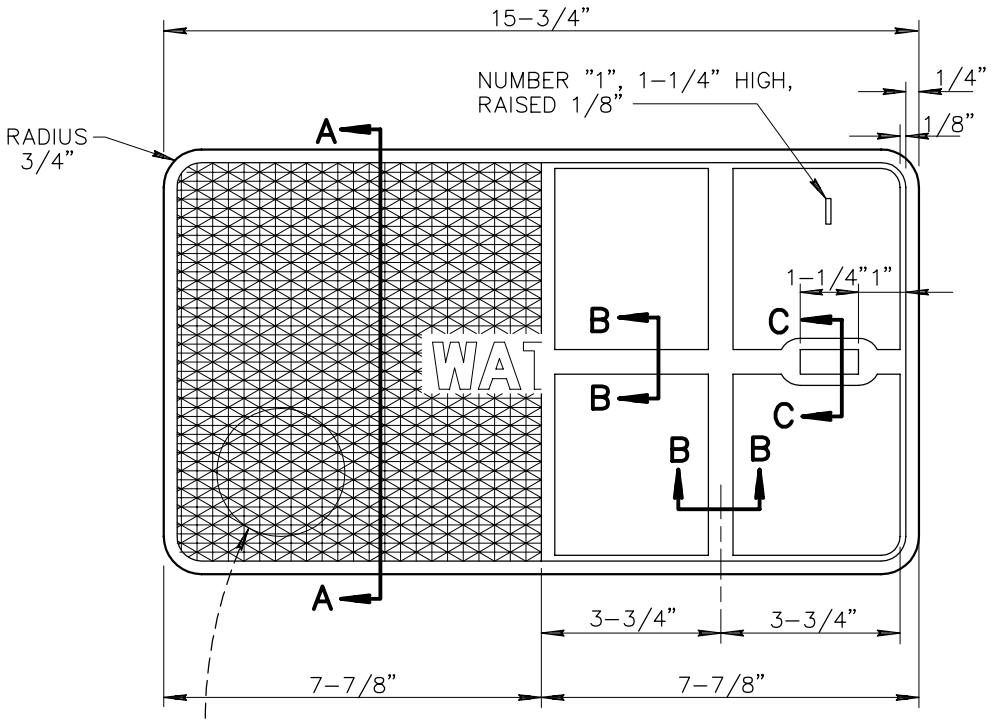

PLAN

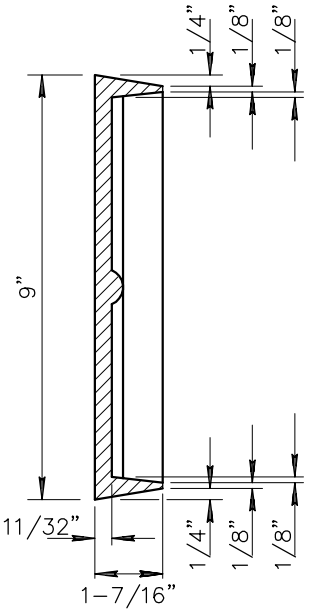

SECTION A–A

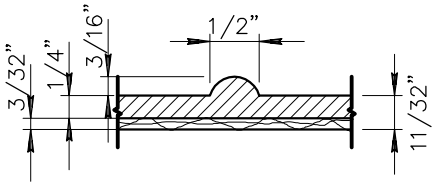

SECTION B–B

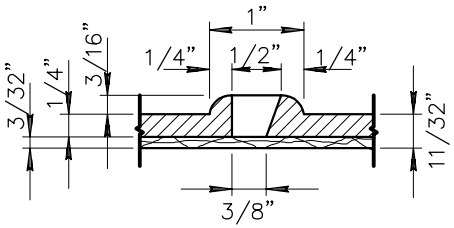

SECTION C–C



TOP OF COVER

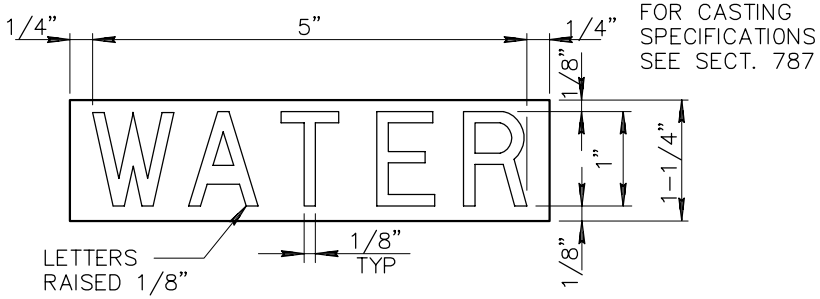

DETAIL NO.			REVISED	DETAIL NO.
310	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**CAST IRON WATER METER BOX COVER NO. 1**		310

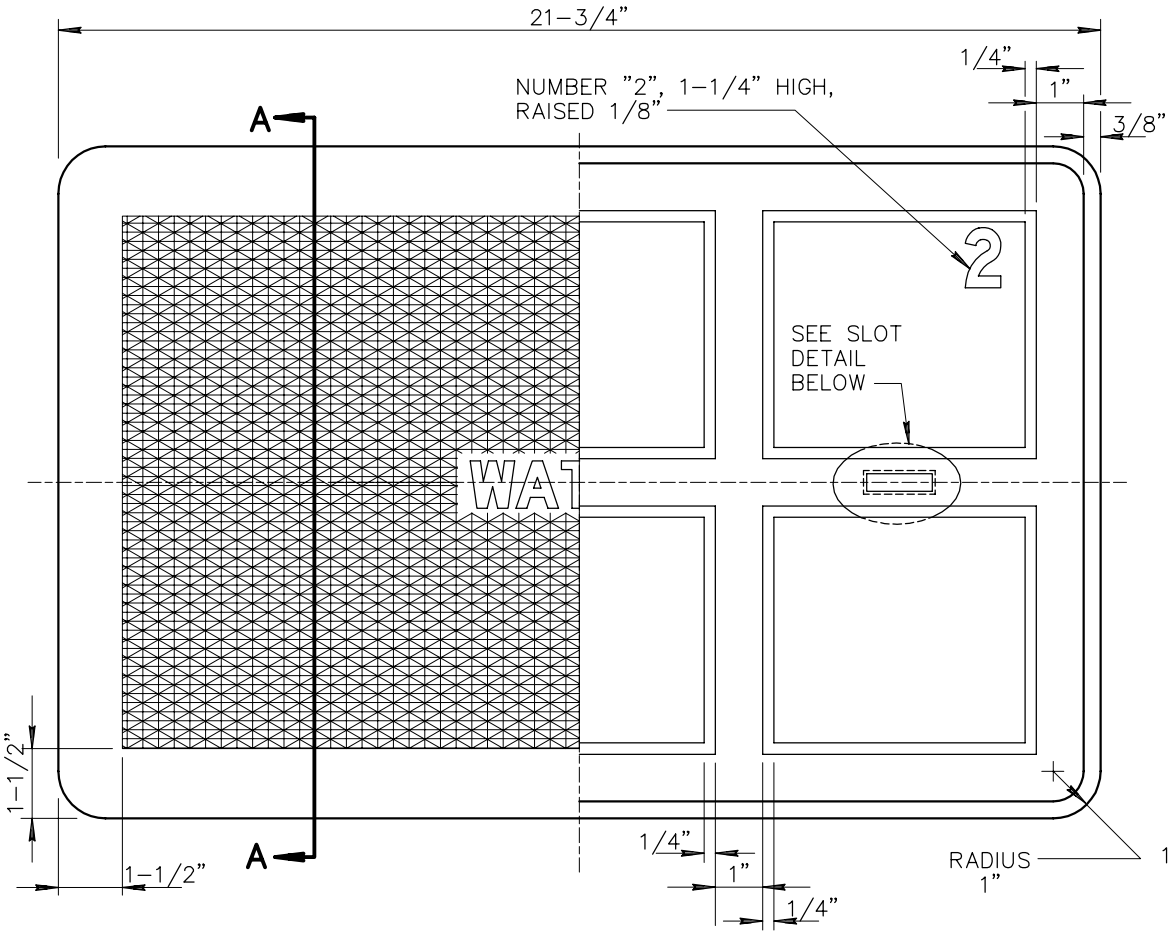

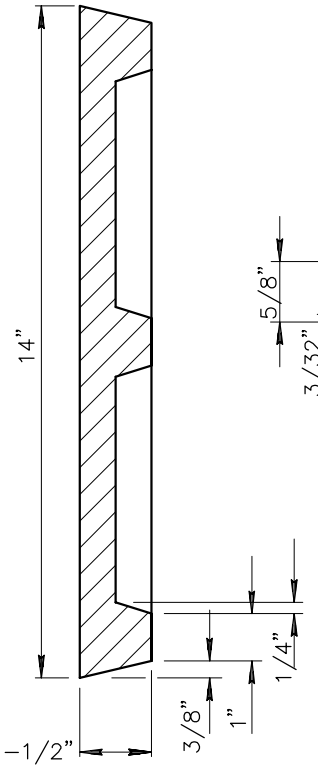

SECTION A–A

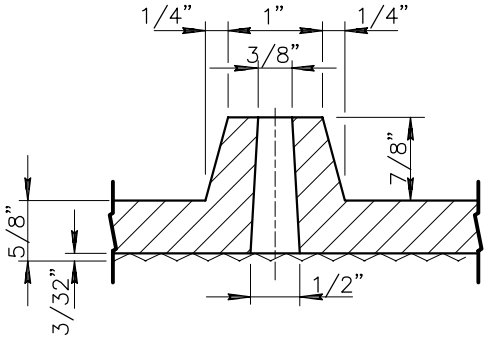

SECTION B–B

NOTE:

FOR CASTING SPECIFICATIONS
SEE SECT. 787.



TOP OF COVER



SLOT DETAIL

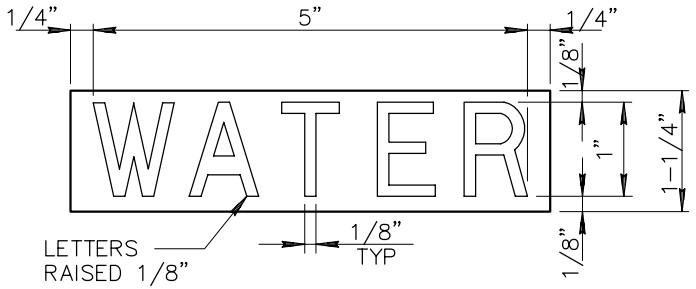

DETAIL NO.			REVISED	DETAIL NO.
311	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**CAST IRON WATER METER BOX COVER NO. 2**		311

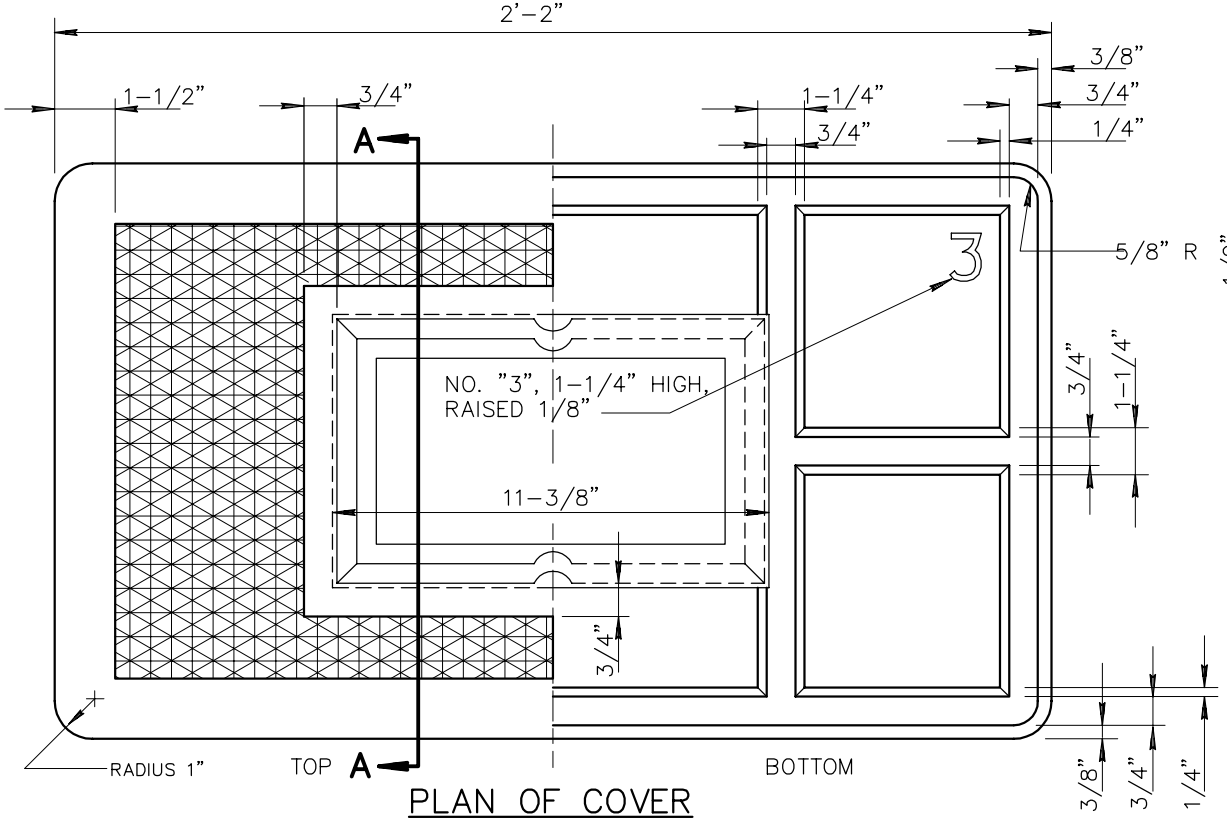

PLAN OF COVER

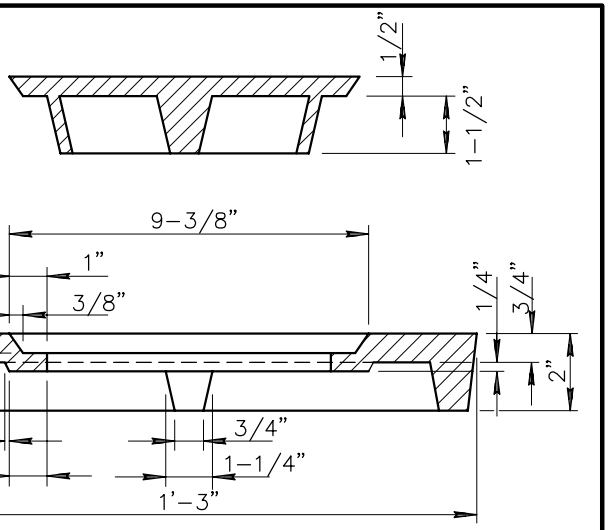

SECTION A-A

NOTES:

1. INSPECTION PLATE IS SAME AS USED WITH METER BOX COVER NO. 4.
2. FOR CASTING SPECIFICATIONS, SEE SECTION 787.
3. THE BEARING EDGES OF THESE CASTINGS SHALL BE MACHINED TO INSURE A FULL BEARING ON A FLAT SURFACE.



DETAIL

TOP OF COVER & PLATE

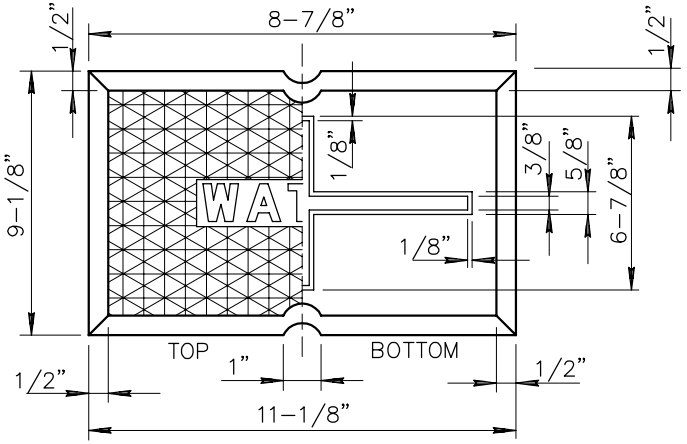

INSPECTION PLATE

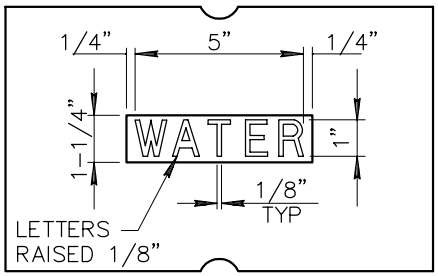

LETTERING DETAIL

DETAIL NO.				REVISED	DETAIL NO.
312	MARICOPA ASSOCIATION of GOVERNMENTS	STANDARD DETAIL ENGLISH	CAST IRON WATER METER BOX COVER NO. 3		312

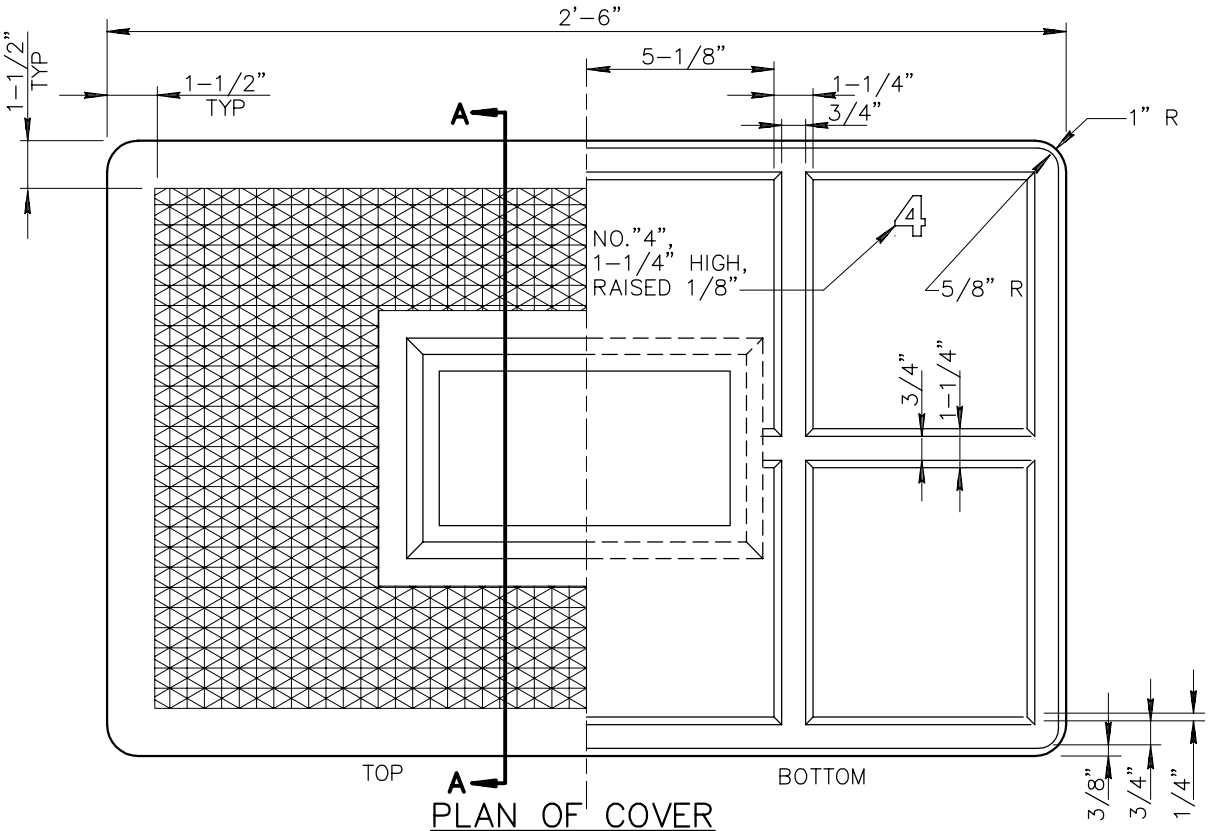

PLAN OF COVER

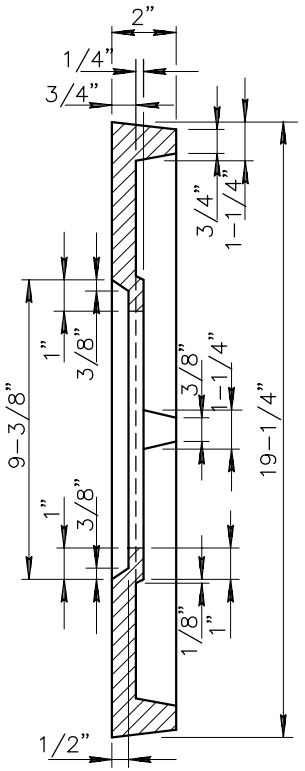

SECTION A–A



TOP OF COVER

NOTES:

1. FOR CASTING SPECIFICATIONS, SEE SECT. 787. THE BEARING
2. THE BEARING EDGES OF THESE CASTINGS SHALL BE MACHINED TO INSURE A FULL BEARING ON A FLAT SURFACE.

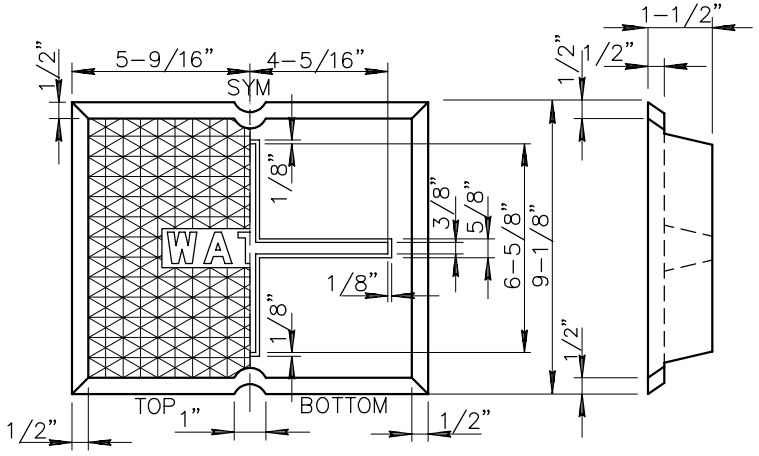

INSPECTION PLATE

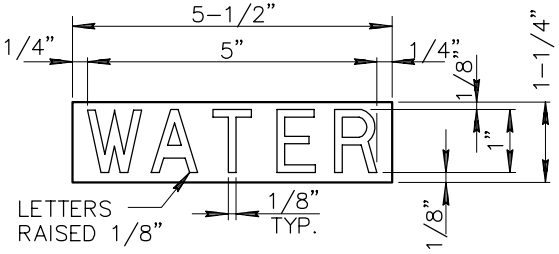

LETTERING DETAIL

DETAIL NO.			REVISED	DETAIL NO.
313	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CAST IRON WATER METER BOX COVER NO. 4		313

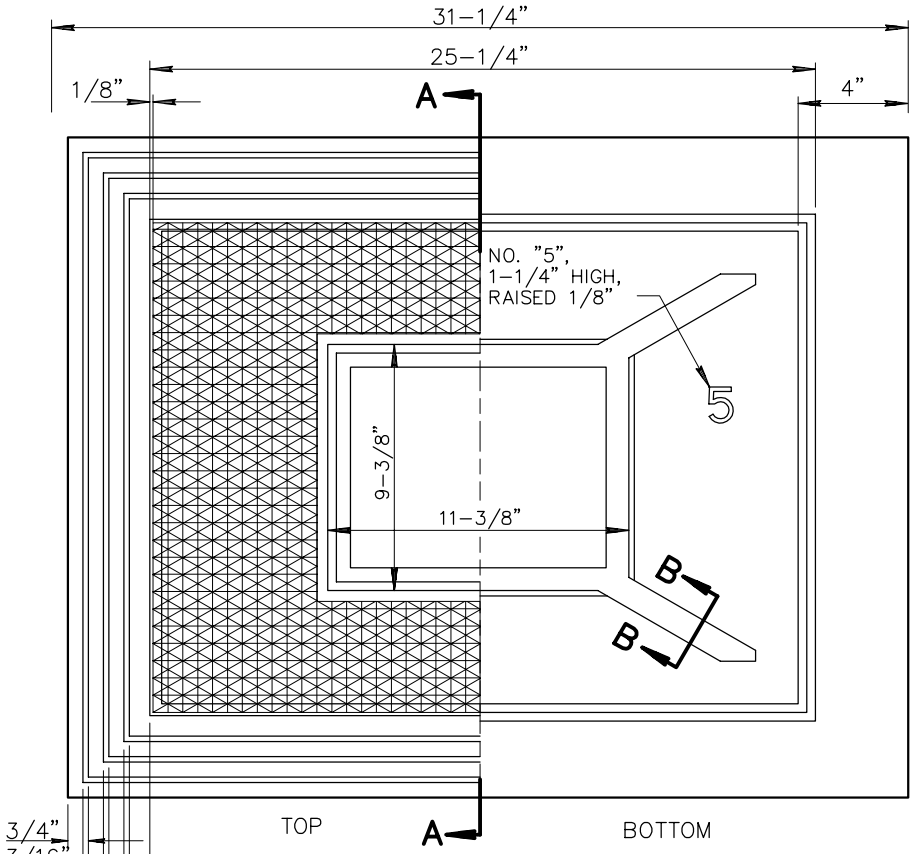

PLAN OF COVER







SECTION B-B

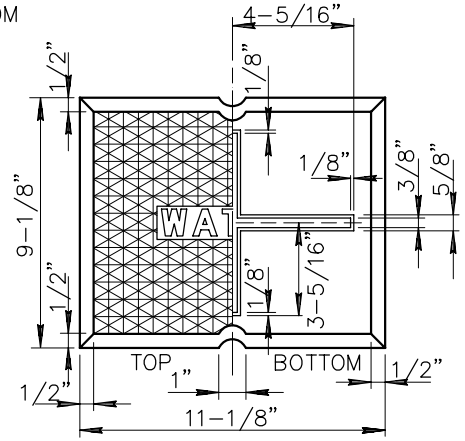

INSPECTION PLATE



DETAIL
TOP OF COVER

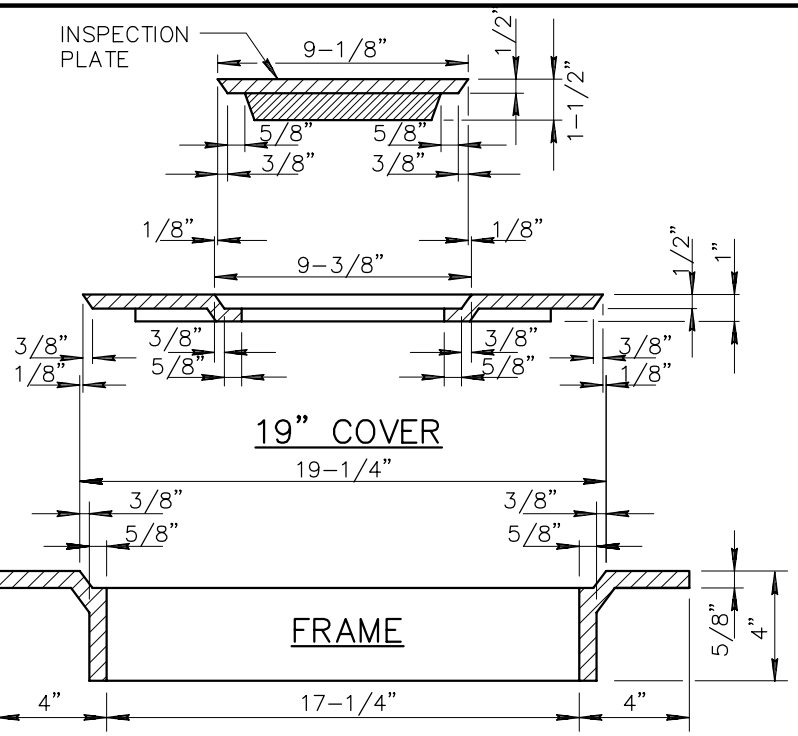

SECTION A-A

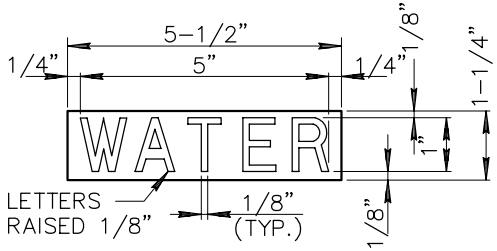

LETTERING DETAIL

NOTES:

1. FOR CASTING SPECIFICATIONS, SEE SECT. 787.
2. THE BEARING EDGES OF THESE CASTINGS SHALL BE MACHINED TO INSURE A FULL BEARING ON A FLAT SURFACE.

DETAIL NO.			REVISED	DETAIL NO.
314	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**CAST IRON WATER METER BOX COVER NO. 5**		314

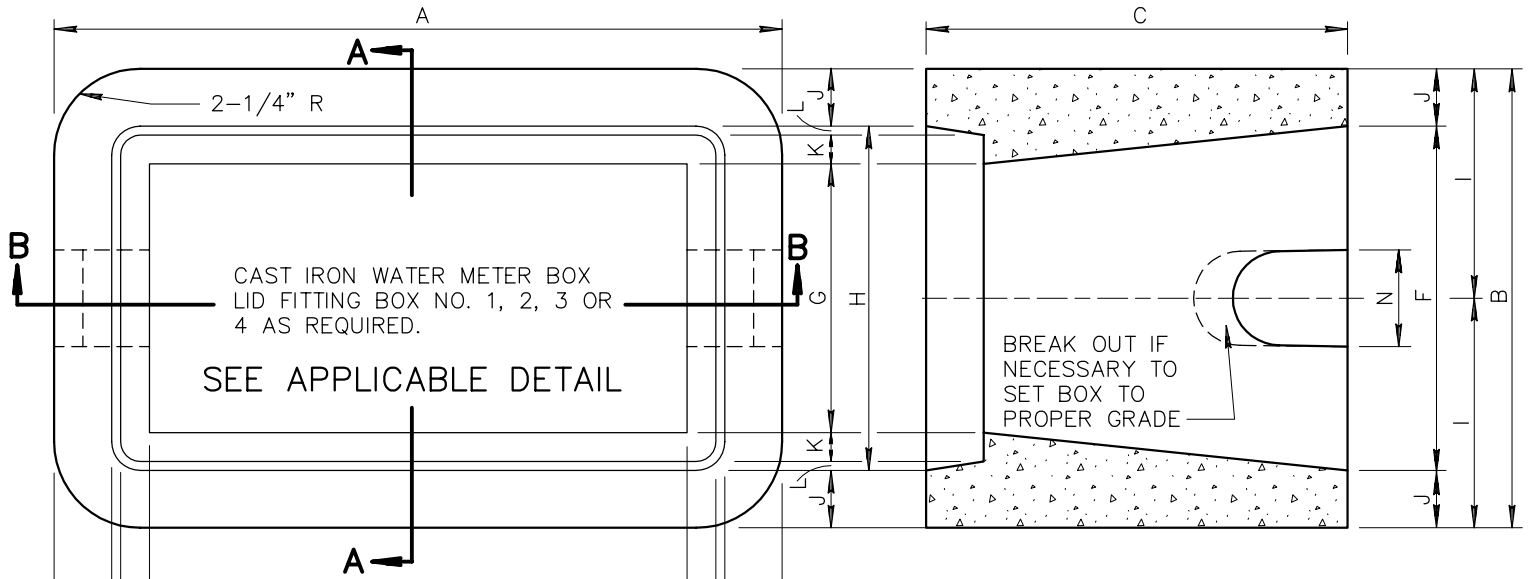

PLAN VIEW

SECTION A–A

NOTES:

1. THE METER BOXES SHALL CONFORM TO THE DIMENSIONS AS SHOWN AND SHALL BE MADE OF PORTLAND CEMENT CONCRETE POURED AND TAMPED (OR VIBRATED) IN TRUE FORMS.
2. USE CLASS 'AA' CONCRETE PER SECT. 725.

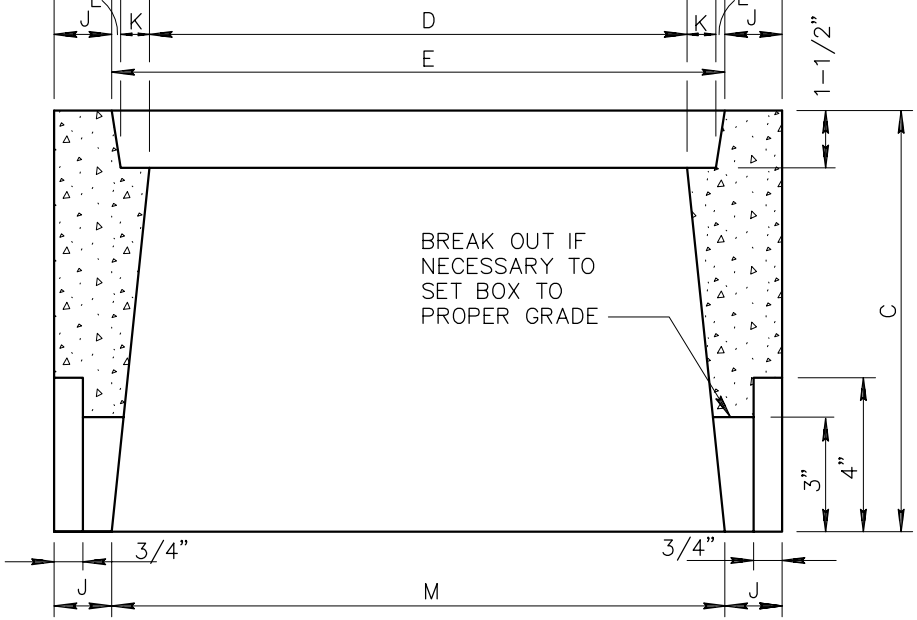

SECTION B–B

METER BOX DIMENSIONS				
DIMS	BOX NUMBER			
	1	2	3	4
A	19"	24–1/2"	29–1/2"	33–1/2"
B	12"	16–3/4"	18–1/2"	22–3/4"
C	11"	12"	13"	12"
D	14"	19"	23–3/4"	27–3/4"
E	16"	22"	26–1/2"	30–1/2"
F	9"	13–1/4"	15"	19–3/4"
G	7"	11–1/4"	12–3/4"	17"
H	9"	14–1/4"	15–1/2"	19–3/4"
I	6"	8–3/8"	9–1/4"	11–3/8"
J	1–1/2"	1–3/4"	1–3/4"	1–1/2"
K	3/4"	1–1/8"	1"	1"
L	1/4"	3/8"	3/8"	3/8"
M	16"	21"	25–1/2"	30–1/2"
N	2–1/2"	3–1/2"	4"	4"
	5/8" OR 3/4" METER	1" METER	1–1/2" METER	2" METER

DETAIL NO.			REVISED	DETAIL NO.
320	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CONCRETE WATER METER BOXES		320

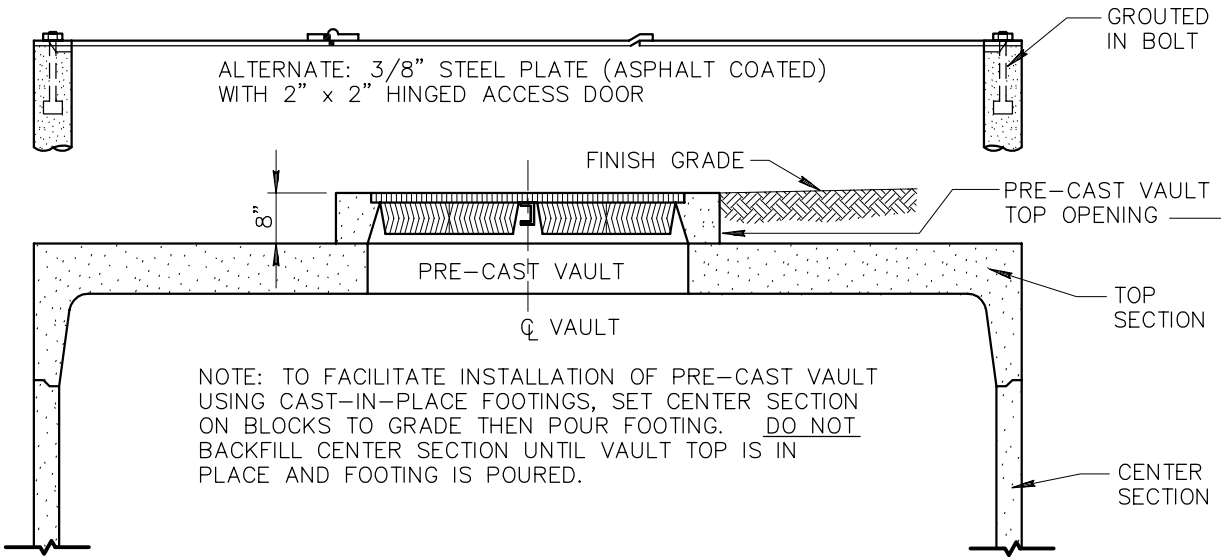

PRE-CAST VAULT SECTION

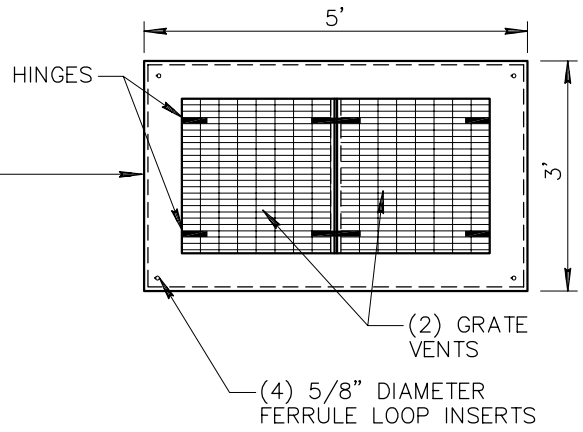

NOTE: PRECAST REINFORCED VAULT SECTIONS SHALL BE CONSTRUCTED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS AND DETAILS AS APPROVED BY ENGINEER.

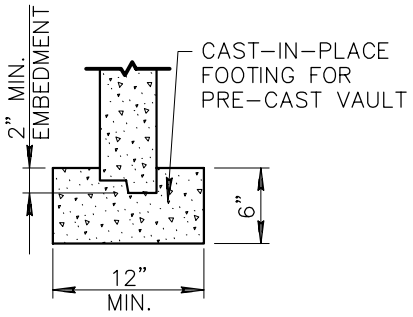

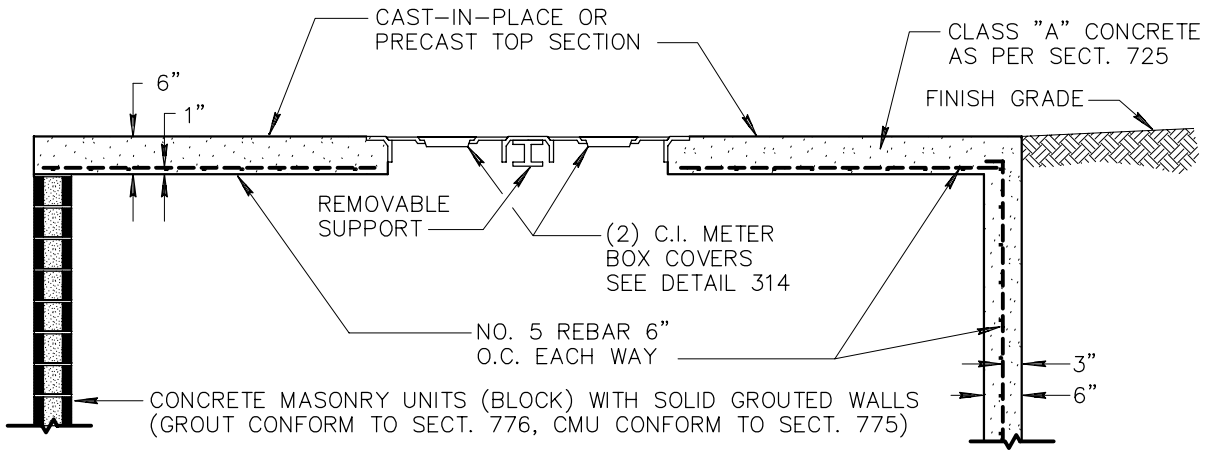

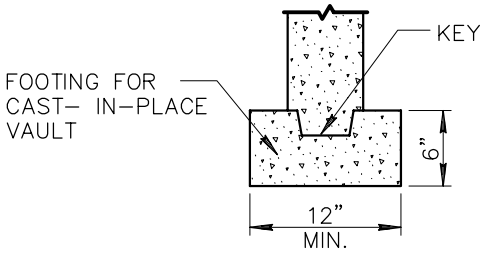

BLOCK MASONRY MAY BE USED IN LIEU OF CAST-IN-PLACE VAULT WALLS, NO. 4 REBAR IN EVERY OTHER CORE.

CAST-IN-PLACE VAULT SECTION

DETAIL NO.			REVISED	DETAIL NO.
321	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	STANDARD WATER METER VAULT		321

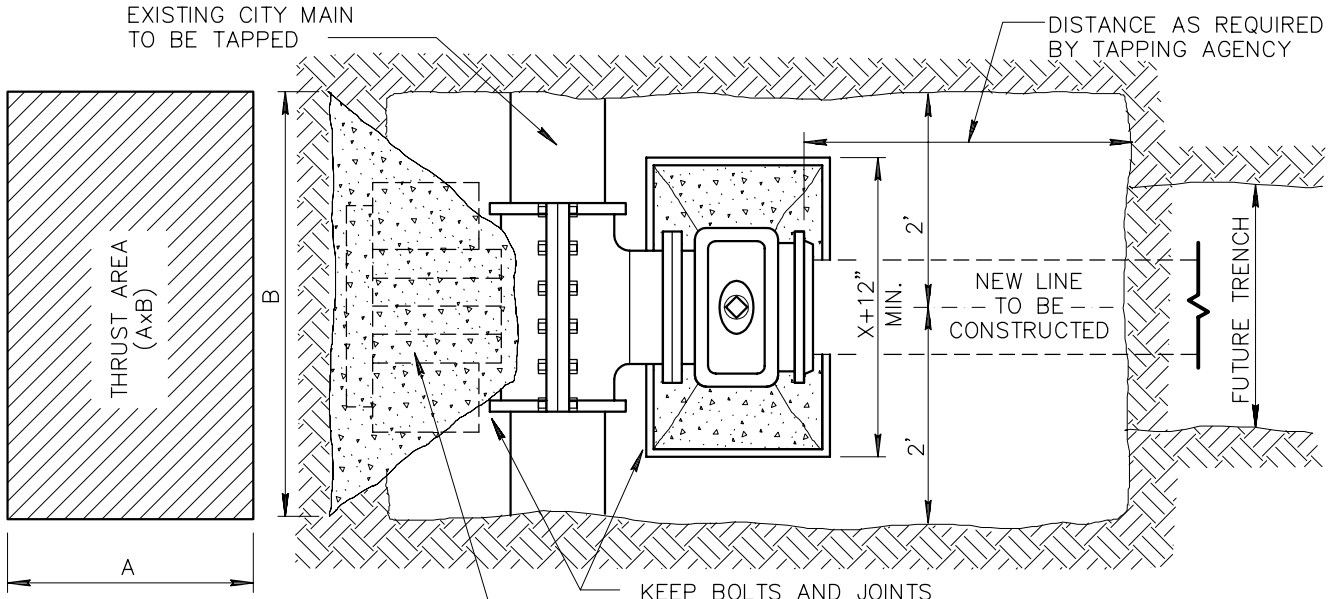

PLAN

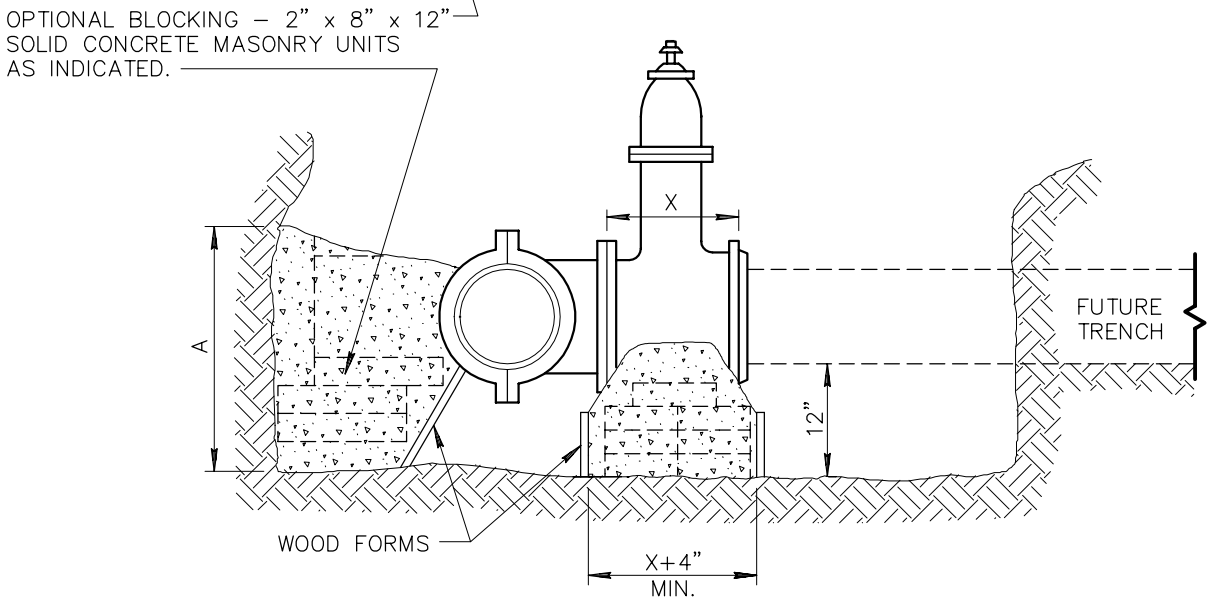

ELEVATION

NOTES:

1. TAPPING SLEEVE TO BE PLACED A MINIMUM OF 18" FROM ANY BELL COUPLING, VALVE, FITTING OR OTHER OBSTRUCTION
2. CONTRACTOR SHALL EXCAVATE AS SHOWN AND SHALL SET TAPPING SLEEVE AND VALVE AND TIGHTEN ALL BOLTS PRIOR TO THE PRESSURE TEST.
3. ALL TAPPING SLEEVES AND VALVES MUST BE PRESSURE TESTED PRIOR TO BLOCKING OR TAPPING. THE TEST MUST BE WITNESSED AND APPROVED BY THE INSPECTOR.
4. BLOCKS ARE TO EXTEND TO UNDISTURBED GROUND AND BE INSTALLED BEFORE THE TAP IS MADE. ALL FLANGE BOLTS SHALL BE FREE AND CLEAR OF CONCRETE.
5. CONCRETE THRUST BLOCKS SHALL BE CLASS 'B' PER SECT. 725. NORMALLY, CURE TIME FOR CONCRETE IS 24 HOURS BEFORE BACKFILLING.
6. TAPS SHALL BE MADE BY CITY CREWS AT PREVAILING RATES OR BY APPROVED CONTRACTORS WHEN ALLOWED BY AGENCY.
7. THIS DETAIL COVERS TAPPING SLEEVES 4" THROUGH 16" IN SIZE ON DUCTILE IRON, CAST IRON AND ASBESTOS CEMENT PIPE. ANY OTHER SIZE OR TYPE OF PIPE WILL REQUIRE A SEPARATE SUBMITTAL AND APPROVAL BY THE ENGINEER.

SIZE OF PIPE BEING CONNECTED	MINIMUM THRUST AREA REQUIRED EQUALS (AxB) (SQUARE FEET)
4" AND LESS	3
6"	4
8"	6
10"	9
12"	13
16"	23

DETAIL NO.			REVISED	DETAIL NO.
340	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	INSTALLING TAPPING SLEEVES AND VALVES	01-03-2002	340

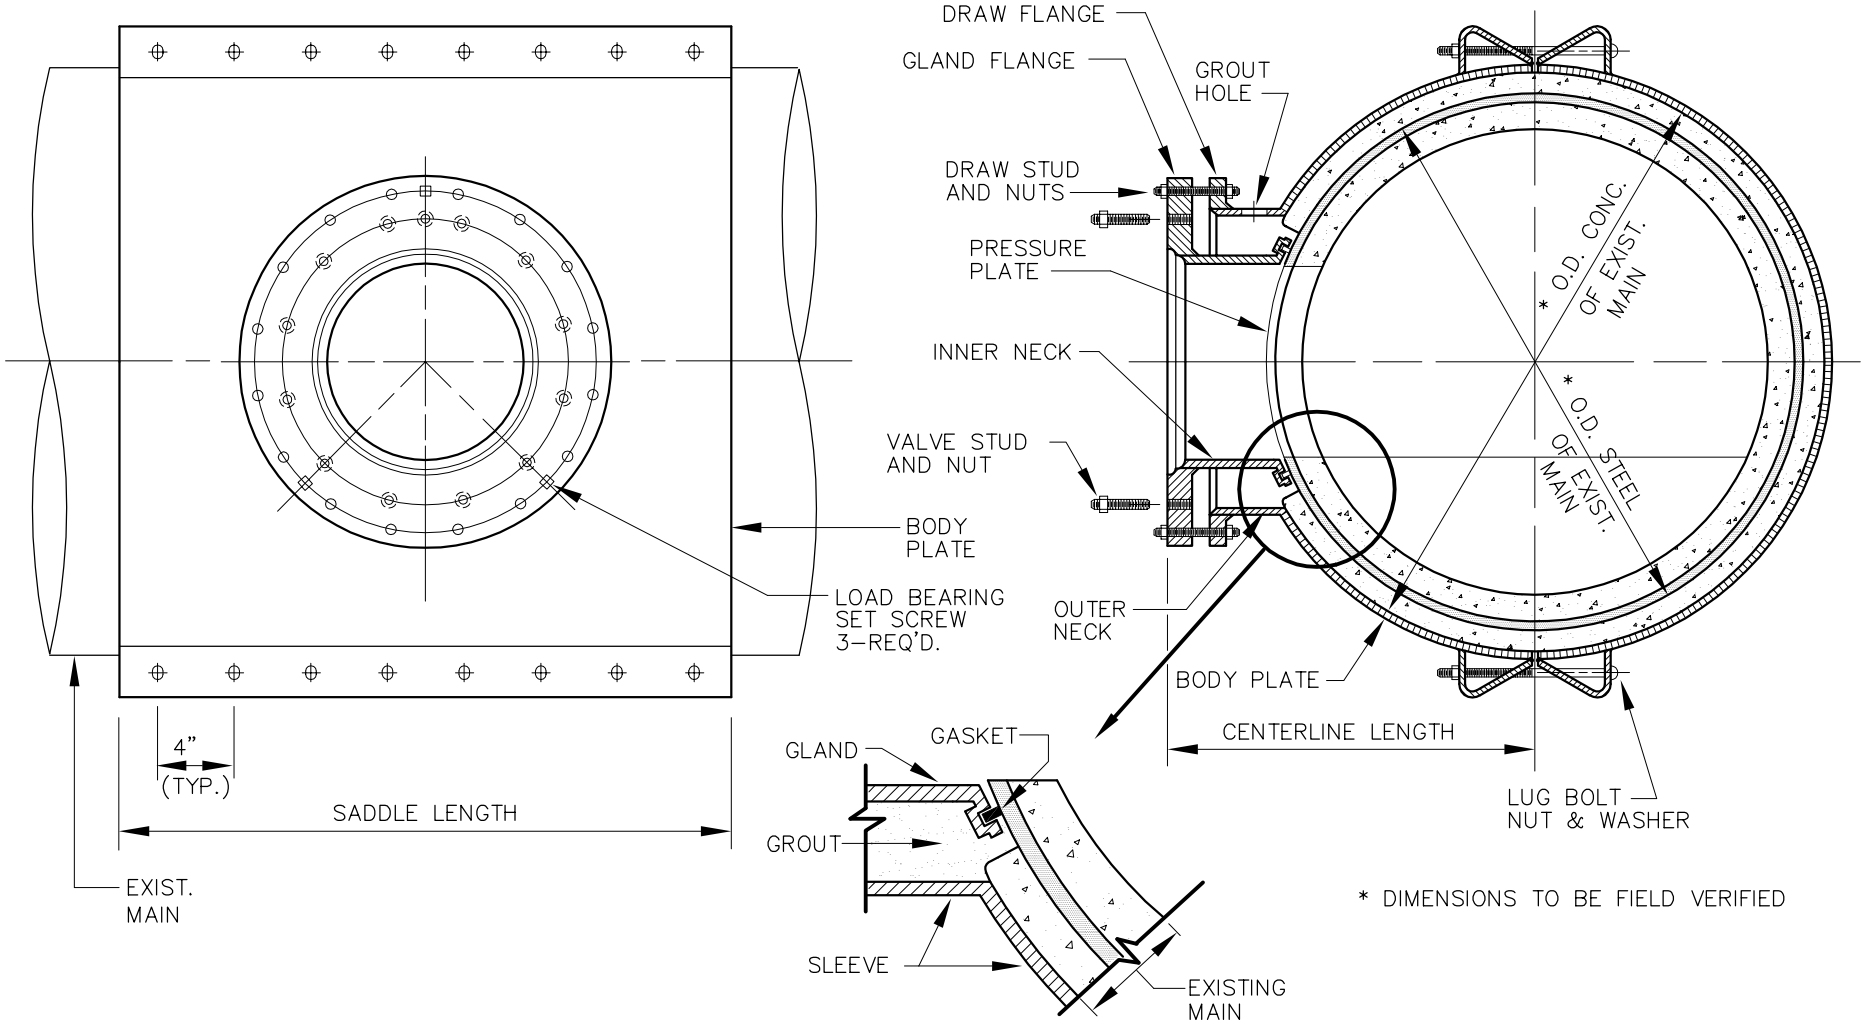

DETAIL NO.			REVISED	DETAIL NO.
342	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CONCRETE PRESSURE PIPE TAPPING SLEEVE		342

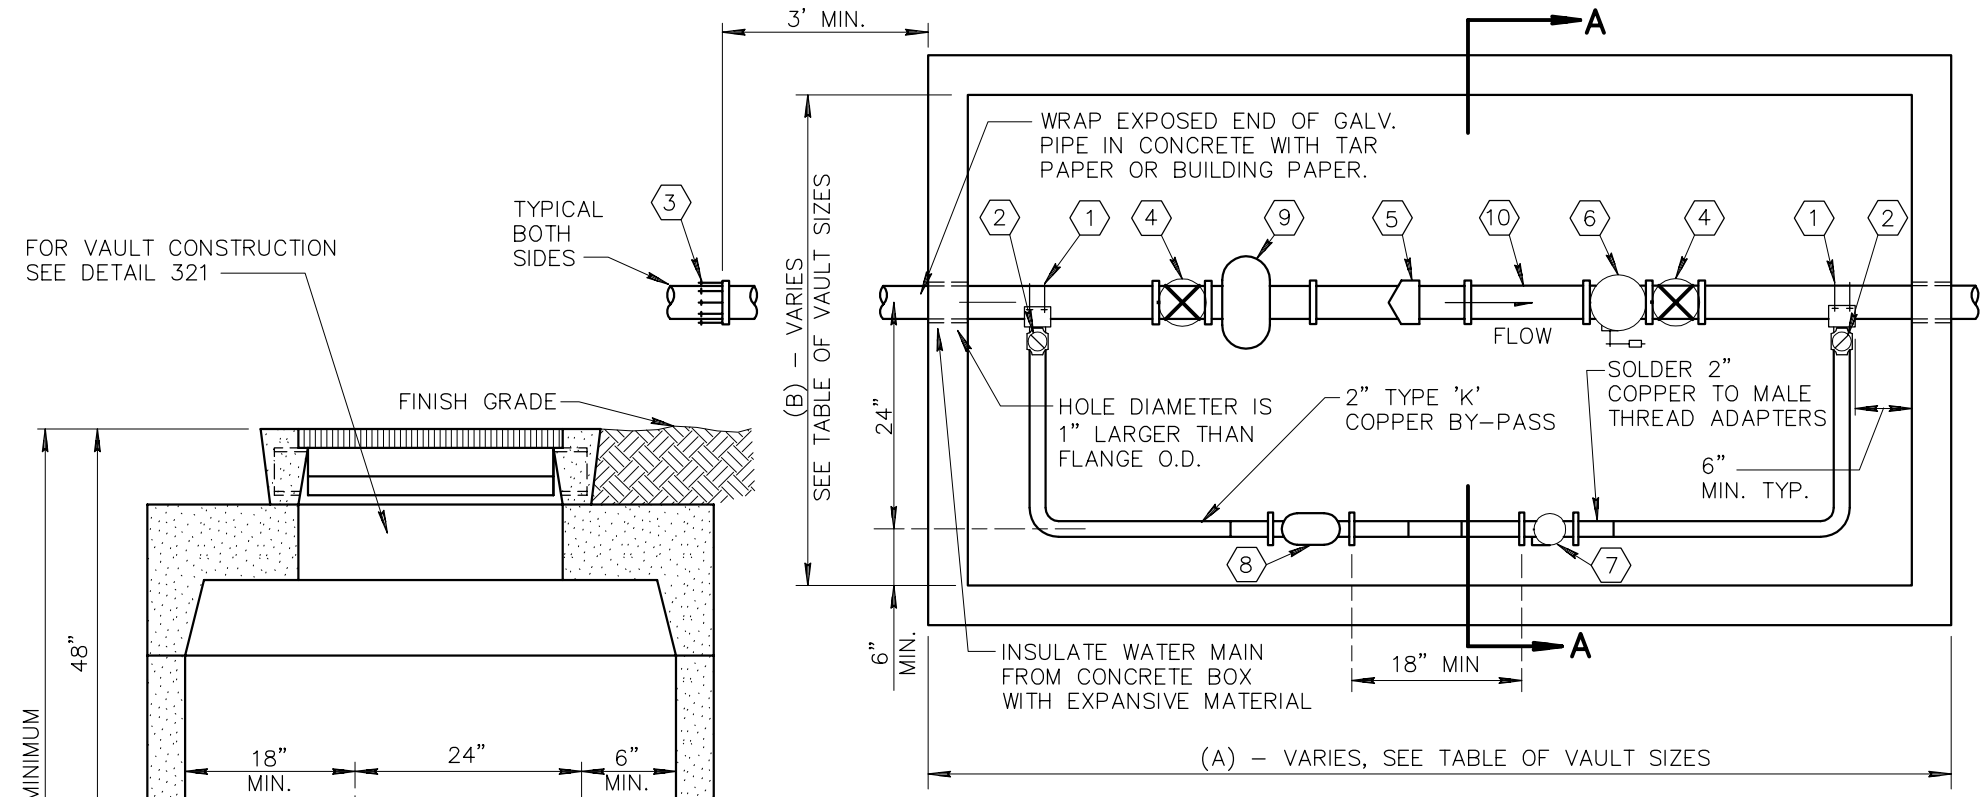

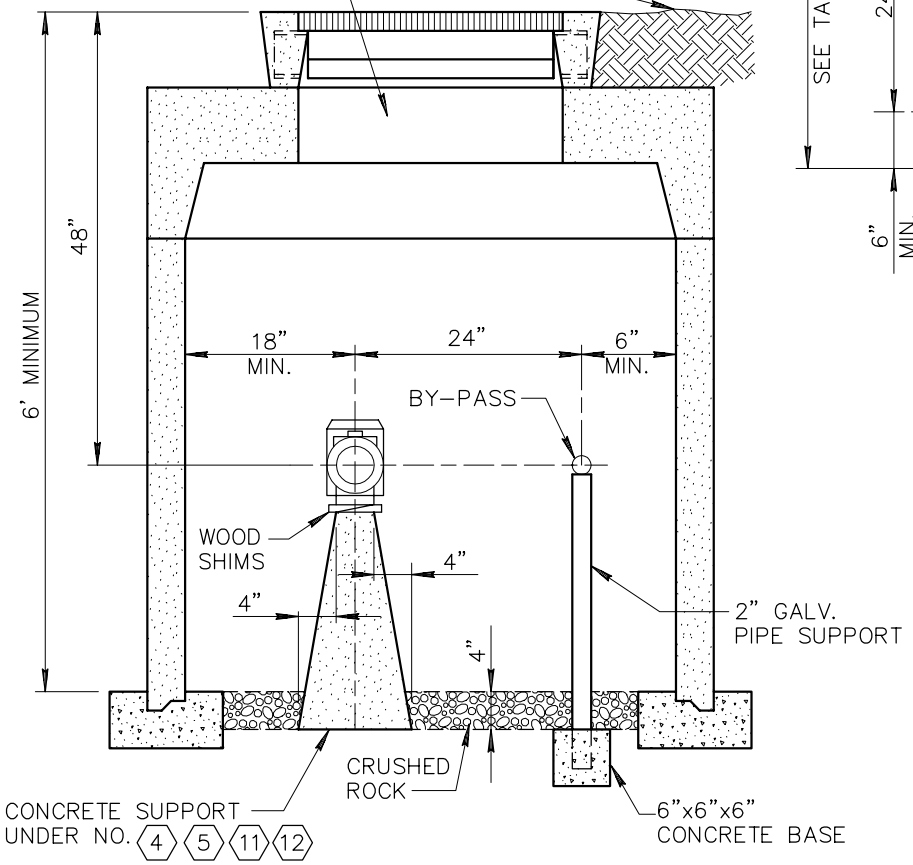

SECTION A–A

VAULT DIMENSION DETAILS			
A.C.P. SIZE	3"	4"	6"
(A)	8'–4"	10'–6"	12'–0"
(B)	4'–4"	5'–0"	5'–0"

NOTE: METER VAULTS MAY BE EITHER CONCRETE MASONRY UNITS OR CAST–IN–PLACE OR PRE–CAST CONCRETE, SEE DETAIL 321 FOR VAULT CONSTRUCTION.

DETAIL NO.			REVISED	DETAIL NO.
345-1	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	3", 4", 6" WATER METER		345-1

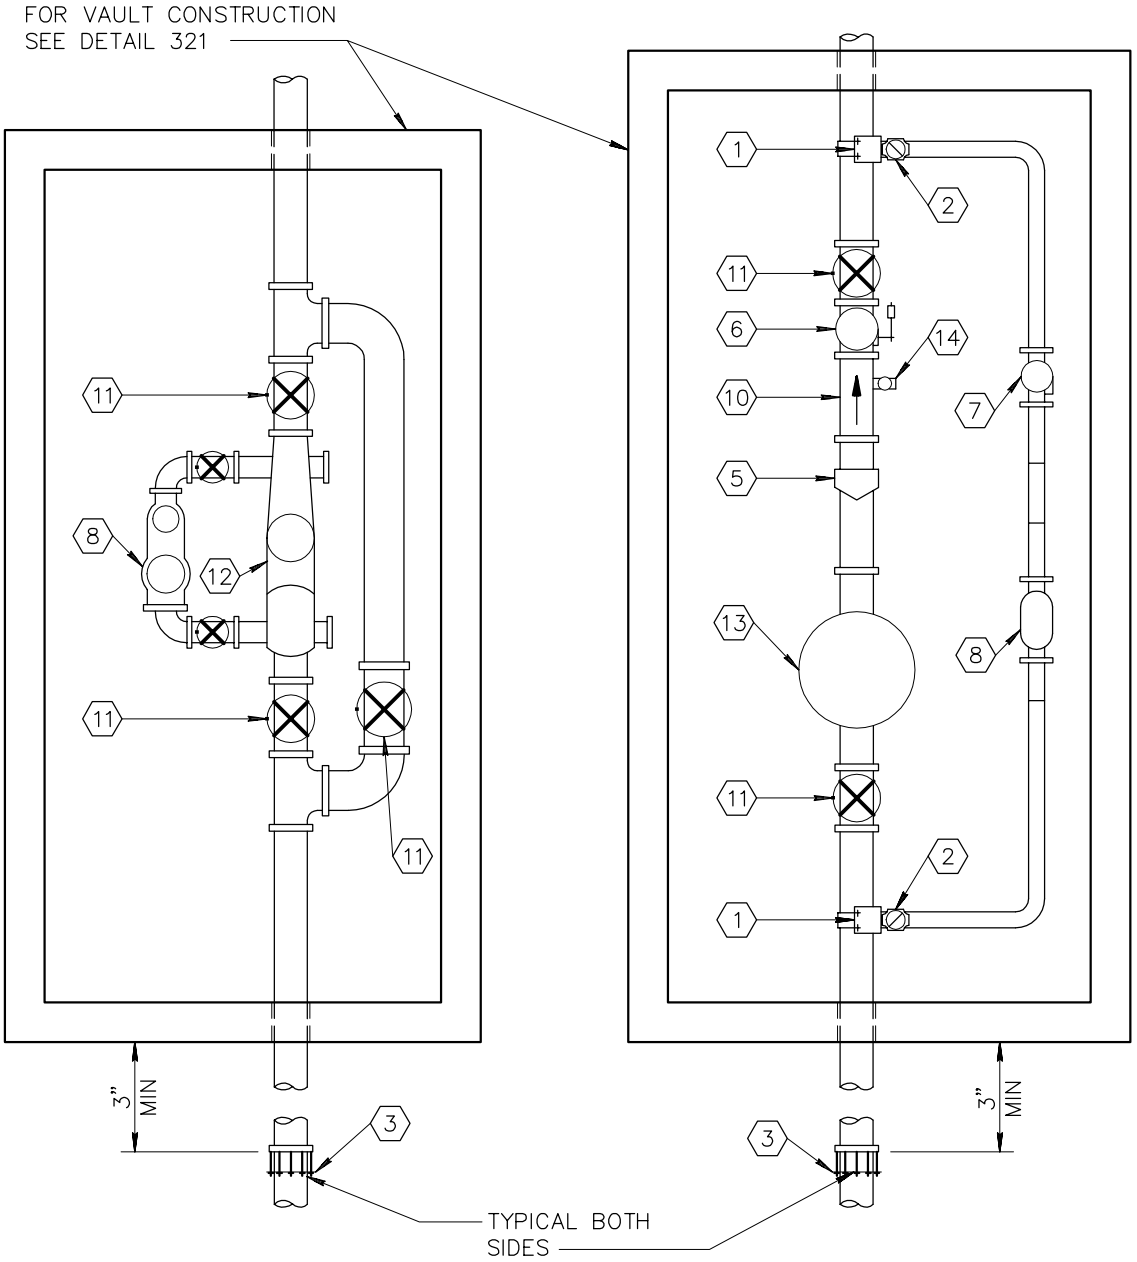

LEGEND

1. DOUBLE STRAP ALL BRONZE SERVICE SADDLES.
2. CORP. STOP, 2" (BALL TYPE).
3. ADAPTER, FLANGED, TO MECH. JOINT FOR A.C.P.
4. GATE VALVE, FLANGED, WITH HAND WHEEL, OPEN LEFT.
5. TURBOMETER: ROCKWELL SERIES 'W' OR HERSEY SERIES 'M.H.R.' OR NEPTUNE TRIDENT TURBINE.
6. FLANGED SWING CHECK VALVE WITH EXTERNAL LEVER AND WEIGHT.
7. 2" BRONZE CHECK VALVE.
8. 2" TURBOMETER: ROCKWELL 'W–160' OR HERSEY 'M.H.R.' OR NEPTUNE TRIDENT TURBINE.
9. STRAINER (3", 4", 6") AVAILABLE FROM METER MANUFACTURER, INSTALL ONLY WHEN 'TURBO' IS USED.
10. FLANGED SPOOL (3 PIPE DIAMETERS IN LENGTH).
11. O.S.&Y. GATE VALVE, FLANGED WITH HAND WHEEL OPEN LEFT, AND RISING STEM.
12. TURBOMETER U.L. APPROVED: ROCKWELL W–5000 DR. OR W–2000 DR. OR HERSEY F.M.–C.T. OR NEPTUNE TURBINE–F.S.–U.L.
13. 6" OR 10" STRAINER, U.L. APPROVED.
14. 2" THREADED OUTLET AND GATE VALVE.

NOTES

1. FOR LARGER METERS, SPECIAL VAULT DESIGN IS REQUIRED.
2. USE OF REMOTE READING DEVICE AT OPTION OF UTILTIY.
3. CERTAIN AGENCIES AND/OR UTILITIES PREFER TO CONSTRUCT VAULT, CONTACT AGENCY INVOLVED PRIOR TO VAULT CONSTRUCTION.

DETAIL NO.			REVISED	DETAIL NO.
345-2	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	4", 6" WATER METER WITH ON-SITE FIRE HYDRANTS		345-2

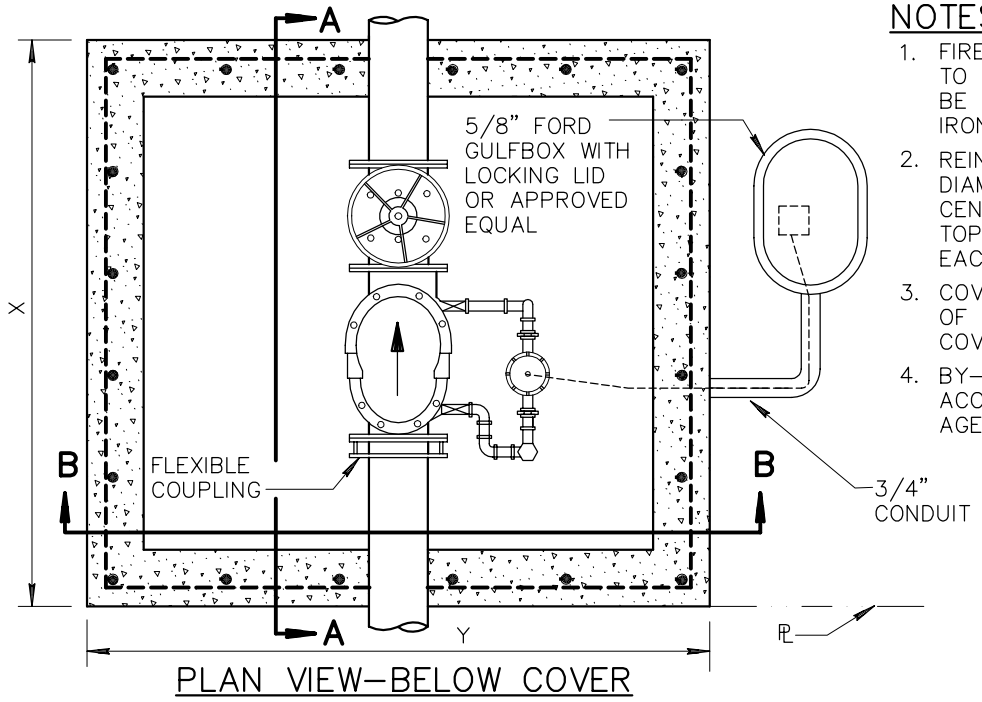

PLAN VIEW–BELOW COVER

NOTES:

1. FIRELINE FROM CITY MAIN TO PROPERTY LINE SHALL BE CONSTRUCTED OF CAST IRON PIPE.
2. REINFORCING TO BE 1/2" DIAMETER REBAR ON 6" CENTERS EACH WAY ON TOP AND 12" CENTERS EACH WAY ON THE SIDES.
3. COVERS TO CONSIST OF TWO METER BOX COVERS DET. 314.
4. BY–PASS METER TO BE ACCORDING TO GOVERNING AGENCY.
5. CHECK VALVE TO BE GLOBE MODEL "A" GRINNEL, HERSEY MODEL D.C., VIKING MODEL "A" OR APPROVED EQUAL.
6. VAULT SHALL BE CONSTRUCTED IN OWNERS PROPERTY AGAINST THE FRONT PROPERTY LINE OR ANOTHER APPROVED LOCATION. WALLS AND FENCES SHALL NOT OBSTRUCT ACCESS.
7. CITY CONTROL VALVE TO BE REQUIRED AT MAIN.
8. PARTS OF PIPE TO BE EMBEDDED IN CONC. SHALL BE WRAPPED WITH 30 LB ASPHALT ROOFING FELT.
9. REMOTE READING DEVICE SHALL BE OF SELF GENERATING ELECTRICAL TYPE. HYDRAULIC OR MECHANICAL DRIVE REGISTERS WILL NOT BE ACCEPTABLE.
10. CONCRETE TO BE CLASS 'B' PER SECT. 725.

DIA. OF PIPE	X	Y	Z	BY–PASS METER SIZE	A
4"	60"	66"	49"	5/8" x 3/4"	30"
6"	66"	72"	49"	5/8" x 3/4"	30"
8"	72"	72"	58"	1"	36"
10"	78"	72"	69"	1–1/2"	36"

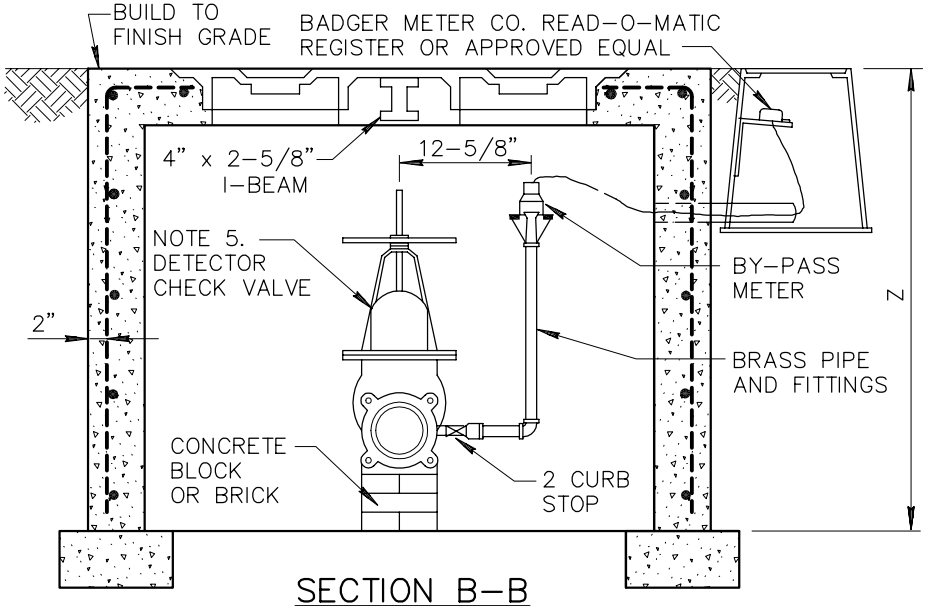

SECTION B–B

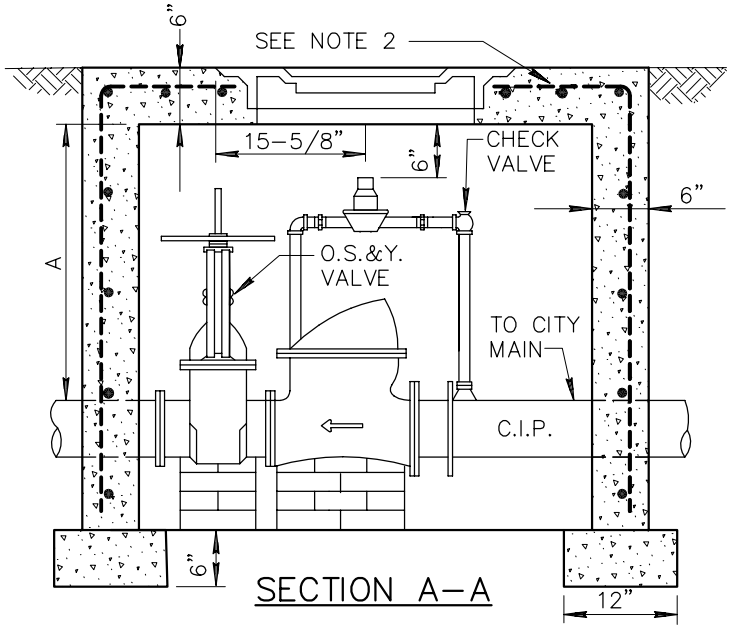

SECTION A–A

DETAIL NO.			REVISED	DETAIL NO.
346	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	FIRE LINE DETECTOR CHECK VAULT		346

NOTES:

1. JOINTS BETWEEN THE VALVE AND THE MAIN SHALL BE FLANGED TYPE. JOINTS BETWEEN THE VALVE AND HYDRANT SHALL BE RESTRAINT OR MECHANICAL TYPE.
2. 90° BEND NOT REQUIRED IF SUFFICIENT ROOM FOR PERPENDICULAR INSTALLATION.
3. FOR CONCRETE THRUST BLOCKS, SEE DETAIL 380.
4. A FLANGE JOINT BY MECHANICAL JOINT VALVE MAY BE USED AS THE TRANSITION BETWEEN THE JOINT TYPES.
5. SEE DETAIL 362 FOR LOCATION OF HYDRANT.
6. FINISH GRADE SHALL BE GROUND LEVEL, SIDEWALK, ADJACENT SIDEWALK, PAVEMENT, ADJACENT CURB OR OTHER NEARBY OBSTRUCTION DENYING WRENCH ACCESS TO THE BOTTOM FLANGE BOLTS.
7. IN LIEU OF THRUST BLOCKS, AN APPROVED JOINT RESTRAINT SYSTEM MAY BE USED.

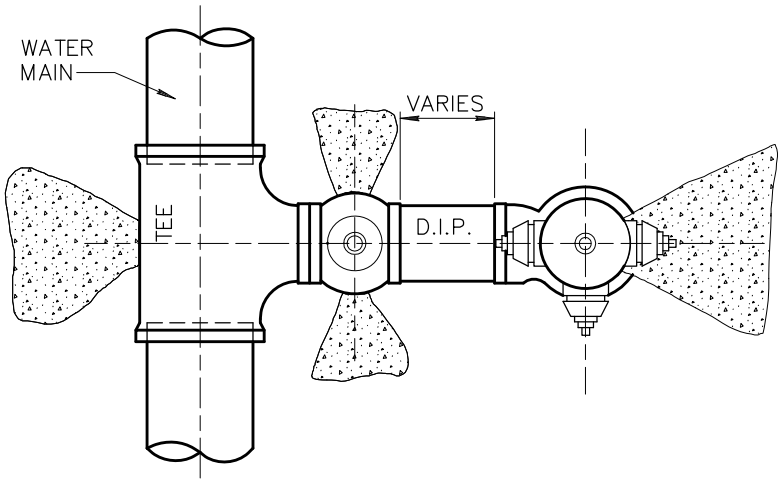

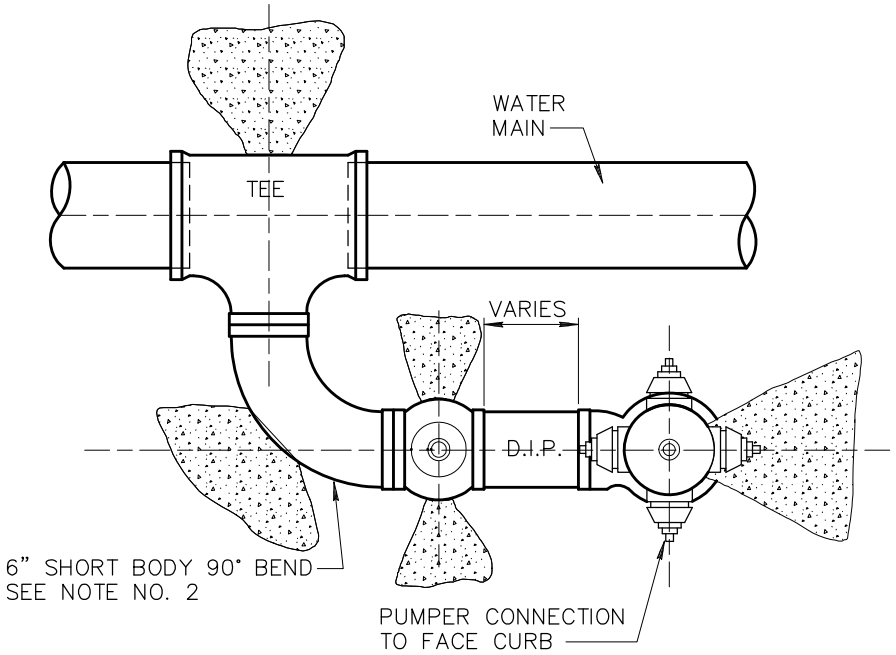

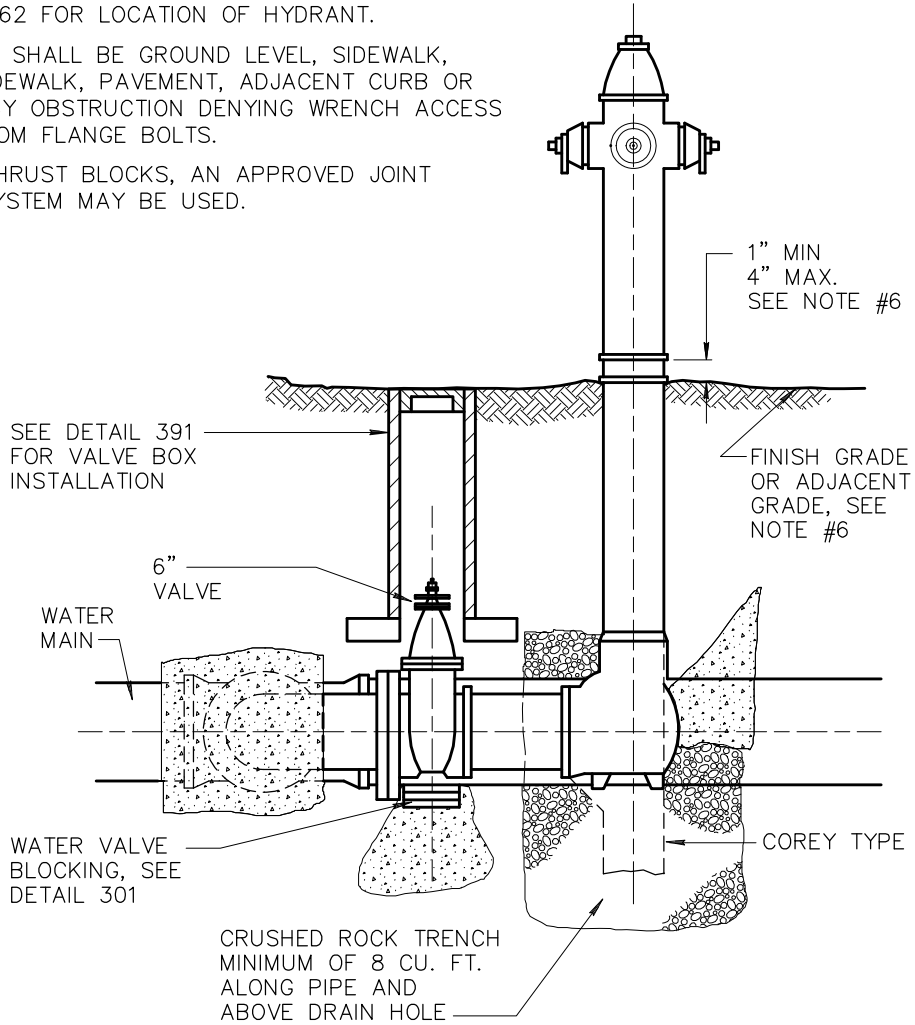

DETAIL NO.			REVISED	DETAIL NO.
360	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	FIRE HYDRANT INSTALLATION	01–01–2008	360

NOTES:

1. OBSTRUCTIONS SUCH AS UTILITY POLES, STREET SIGNS, IRRIGATION BOXES, FENCES, ETC., MUST NOT BE PLACED BETWEEN CURB AND HYDRANT AND WITHIN THE RADIUS FOR FIRE DEPT. ACCESS.
2. DIMENSIONS SHOWN ON CONSTRUCTION DRAWINGS SUPERSEDE LOCATIONS SHOWN HERE.
3. ON LOCATIONS IN MIDBLOCK, THE FIRE HYDRANT WILL BE ALIGNED WITH A PROPERTY LINE.

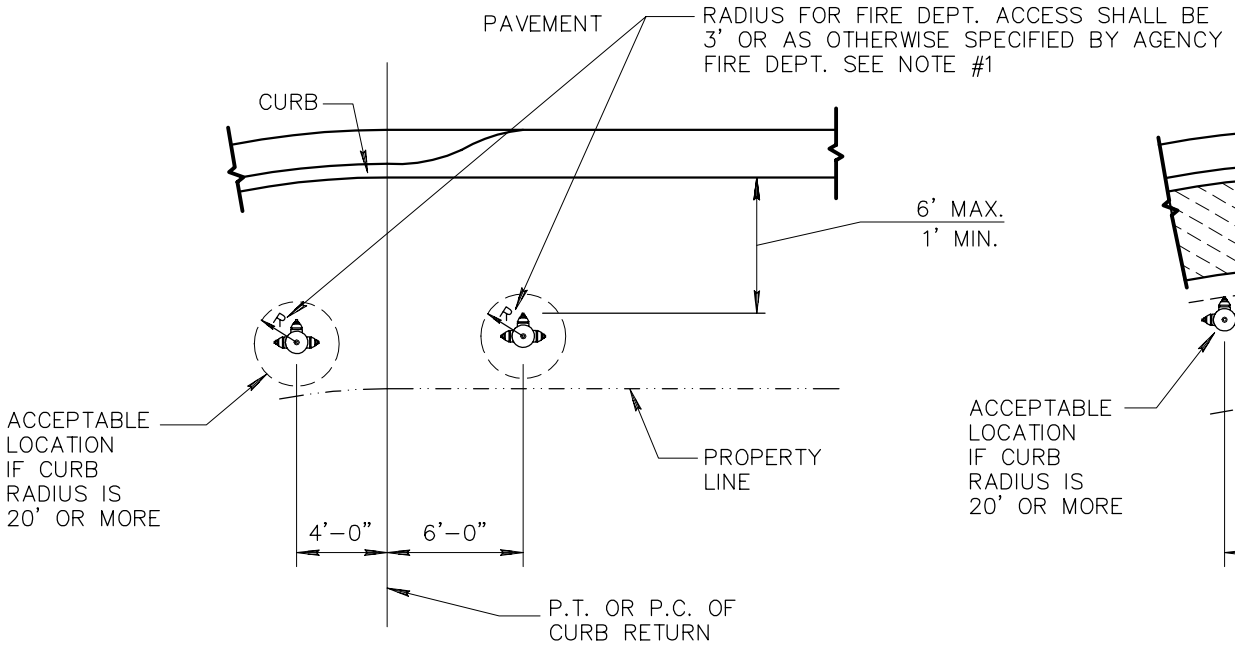

PARKWAY AREA OR NO SIDEWALK

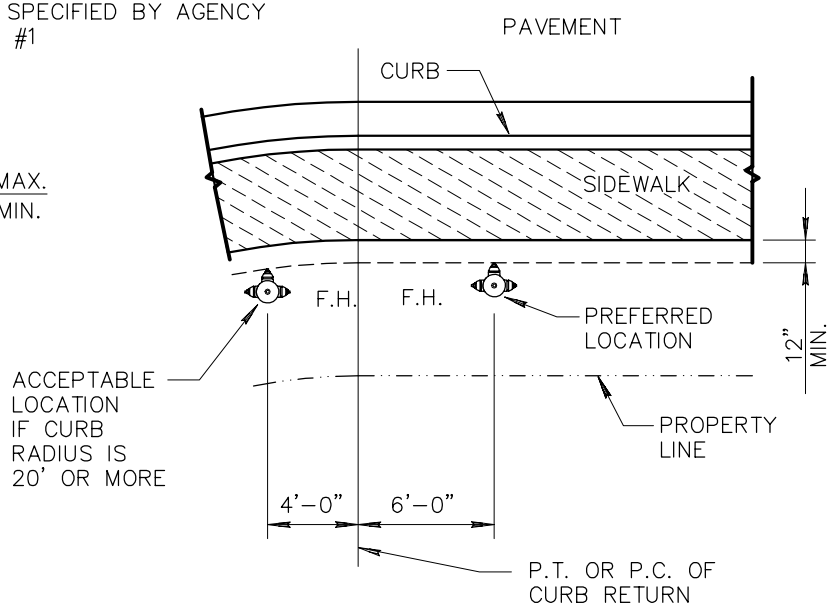

AREA WITH SIDEWALK

DETAIL NO.				REVISED	DETAIL NO.
362	MARICOPA ASSOCIATION of GOVERNMENTS	STANDARD DETAIL ENGLISH	LOCATIONS FOR NEW FIRE HYDRANTS		362

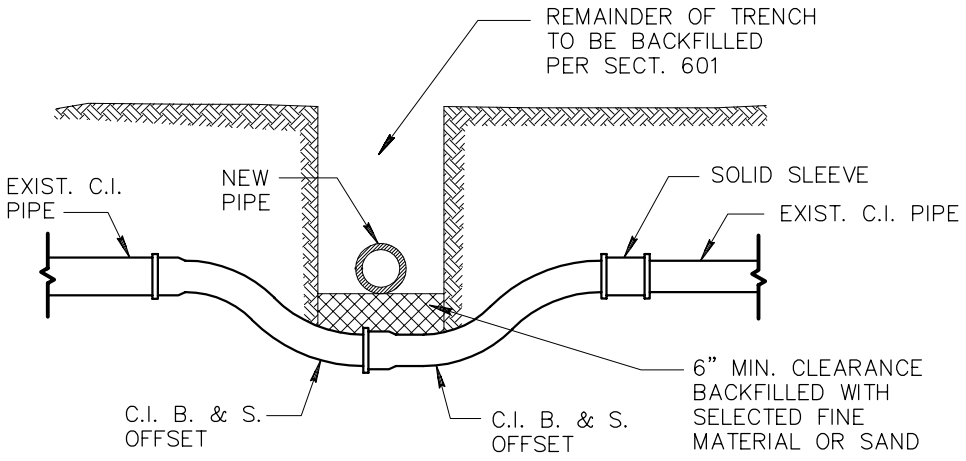

CAST IRON

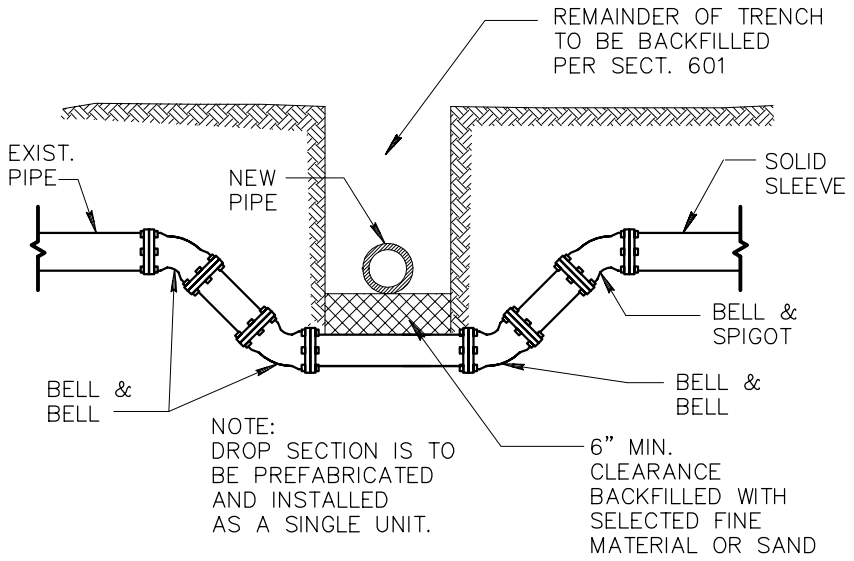

CAST IRON MECHANICAL JOINT

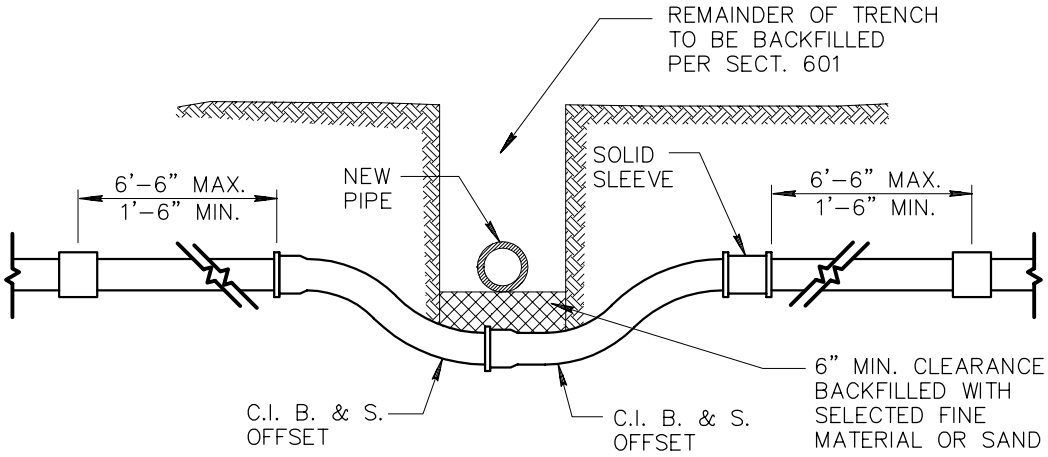

ASBESTOS CEMENT

NOTES:

1. THIS DETAIL COVERS MOVING OF WATER MAINS 2" TO 12" ONLY.
2. THRUST BLOCKING AS PER DET. 380 & 381.
3. IF OFFSET IS TO GO OVER OBSTRUCTION, JOINT RESTRAINTS MUST BE USED.
4. PIPE IS TO BE CAST IRON OR DUCTILE IRON.

DETAIL NO.			REVISED	DETAIL NO.
370	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	VERTICAL REALIGNMENT OF WATER MAINS		370

TYPICAL LOCATIONS OF THRUST BLOCKS

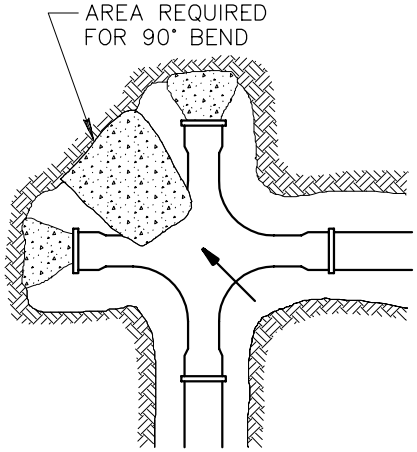

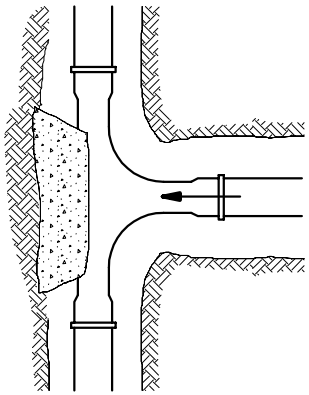

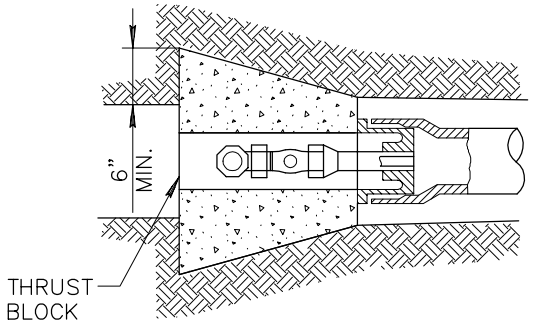

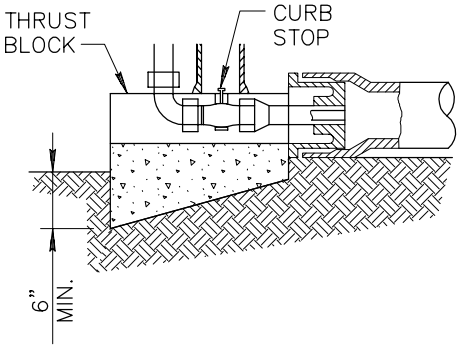

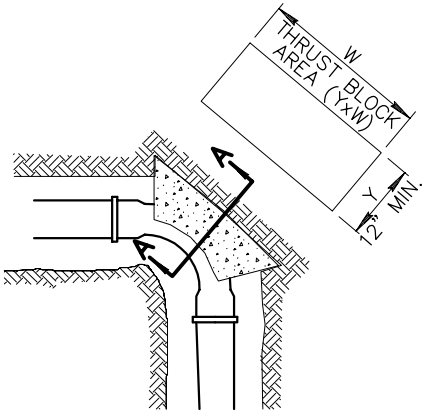

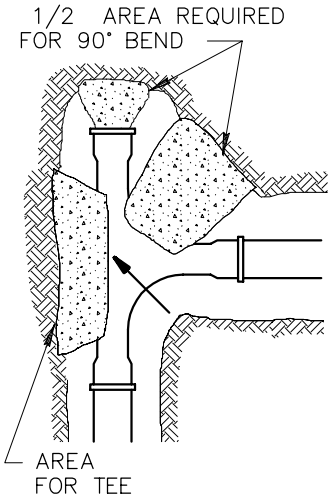

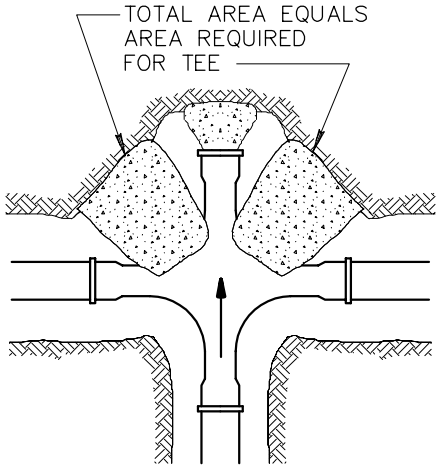



SECTION A–A

NOTES:

1. TABLE IS BASED ON 200 P.S.I. TEST PRESSURE AND 3,000 LBS/SQ FT. SOIL. IF CONDITIONS ARE FOUND TO INDICATE SOIL BEARING IS LESS, THE AREAS SHALL BE INCREASED ACCORDINGLY.
2. AREAS FOR PIPES LARGER THAN 16" SHALL BE CALCULATED FOR EACH PROJECT.
3. FORM ALL NON–BEARING VERTICAL SURFACES.
4. THRUST BLOCKS ARE TO EXTEND TO UNDISTURBED GROUND. CONCRETE TO BE CLASS 'C', SECT. 725.

MINIMUM THRUST BLOCK AREA REQUIRED (YxW) (SQ. FT.)		
PIPE SIZE	WATER PIPE	
	TEE, DEAD END, 90° BEND	45° & 22 1/2° BENDS
4" OR LESS	3	3
6"	4	3
8"	6	3
10"	10	5
12"	14	7
16"	24	12

DETAIL NO.			REVISED	DETAIL NO.
380	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	THRUST BLOCKS FOR WATER LINES		380

PIPE SIZE	MIN BAR SIZE	"A"–DIMENSION HOOK	MIN. * BLOCK DIM.
6"	#6	6"	3' x 3' x 3'
8"	#6	9"	4' x 4' x 2.5'
12"	#8	9"	4' x 4' x 5'

* FOR 125 P.S.I. WORKING PRESSURE.

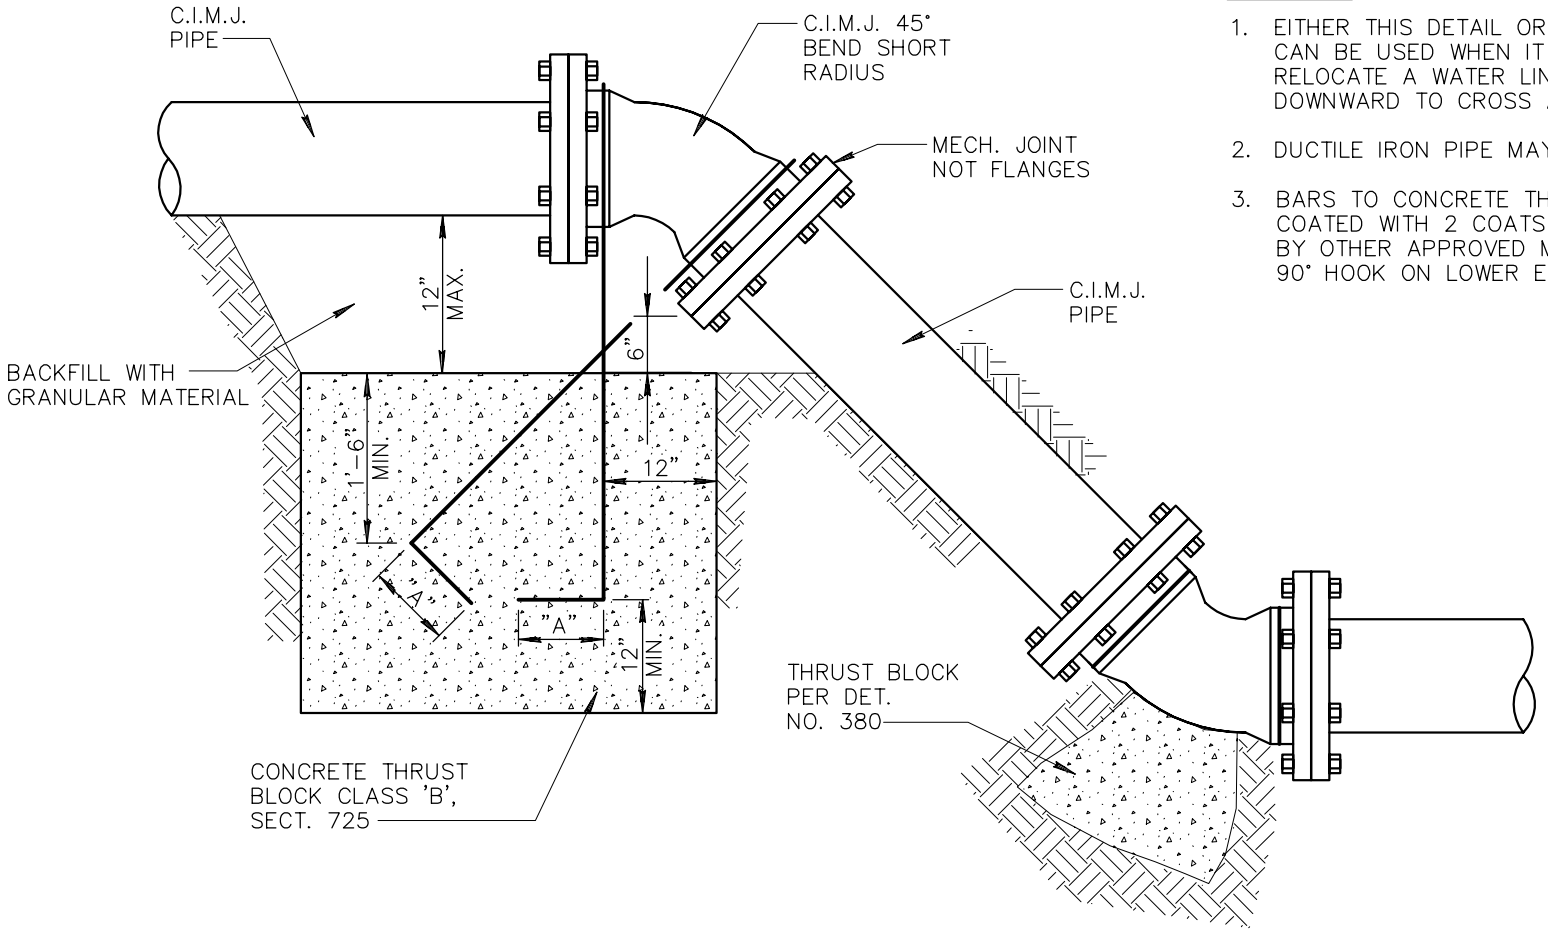

NOTES:

1. EITHER THIS DETAIL OR RESTRAINT RODS CAN BE USED WHEN IT IS ALLOWED TO RELOCATE A WATER LINE UPWARD OR DOWNWARD TO CROSS A CONFLICT.
2. DUCTILE IRON PIPE MAY BE USED.
3. BARS TO CONCRETE THRUST BLOCK TO BE COATED WITH 2 COATS COAL TAR, EPOXY OR BY OTHER APPROVED METHOD. BARS TO HAVE 90° HOOK ON LOWER END, AS PER TABLE.

DETAIL NO.			REVISED	DETAIL NO.
381	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	ANCHOR BLOCKS FOR VERTICAL BENDS		381

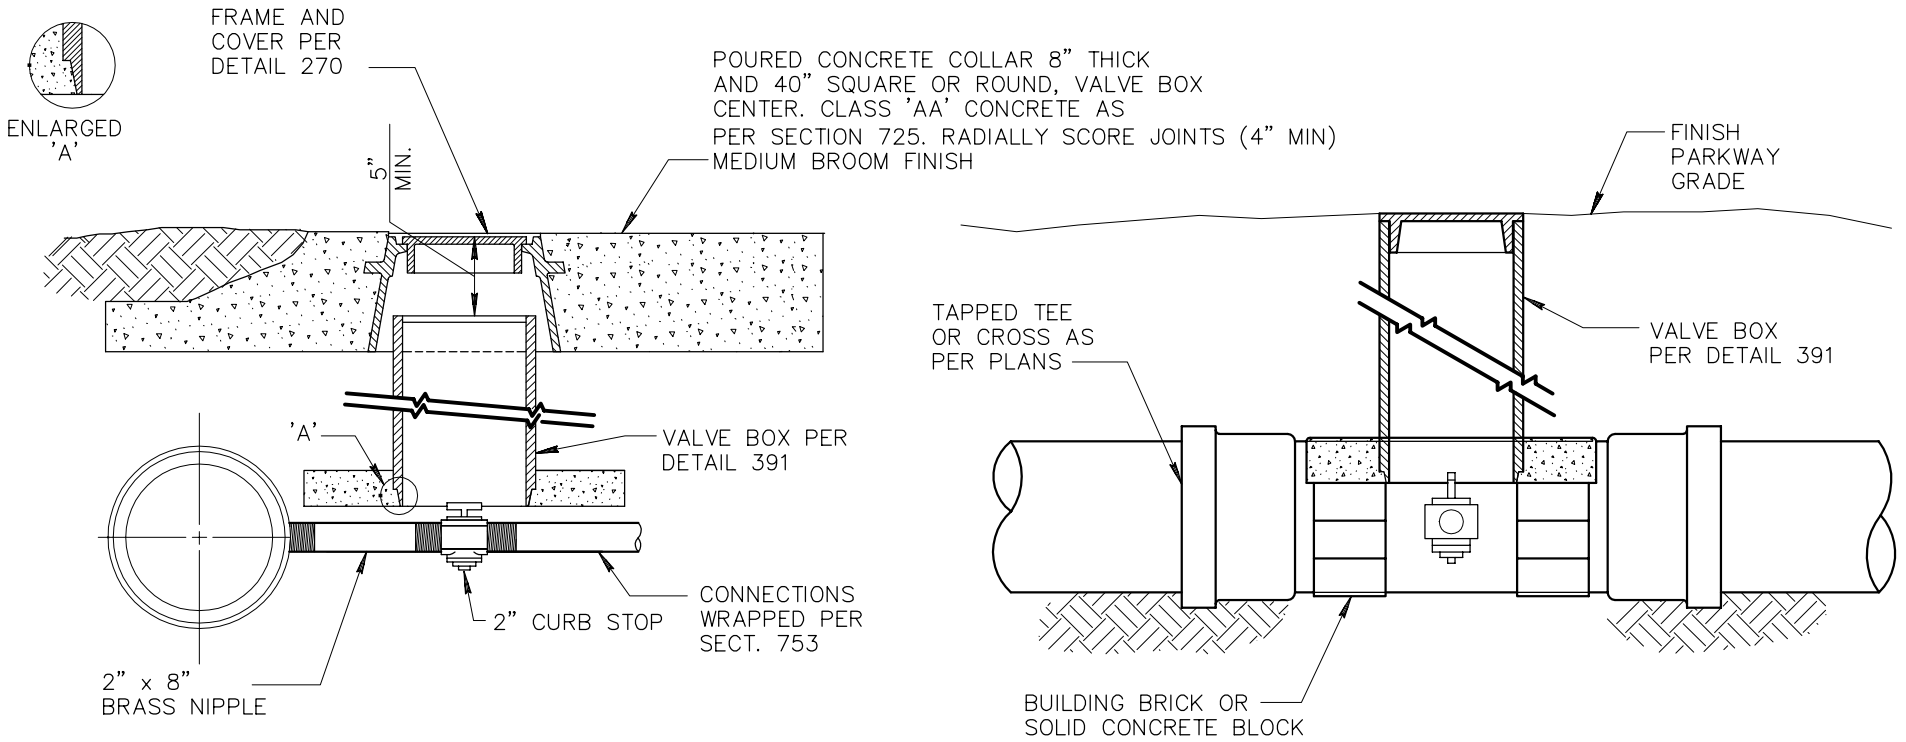

TYPE 'A'

TYPE 'B'

NOTES:

1. CURB STOP TO BE MUELLER ORISEAL (H–10283), FORD BALL VALVE B11–777, HAYES BULLETIN 400, J. JONES (J–1900) OR APPROVED EQUAL.
2. REDUCER MAY BE USED WHEN CONNECTING TO SMALLER GALVANIZED PIPE.
3. THIS DETAIL IS TO BE USED WHEN CONNECTING EXISTING GALVANIZED PIPE TO ASBESTOS CEMENT PIPE OR CAST IRON PIPE.

NOTE:

1. VALVE BOX TO BE SUPPORTED ON BRICKS TO PREVENT VERTICAL LOADS FROM BEING TRANSMITTED TO THE SMALL PIPE.

DETAIL NO.			REVISED	DETAIL NO.
389	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**CURB STOP WITH VALVE BOX AND COVER**	01-01-2001	389

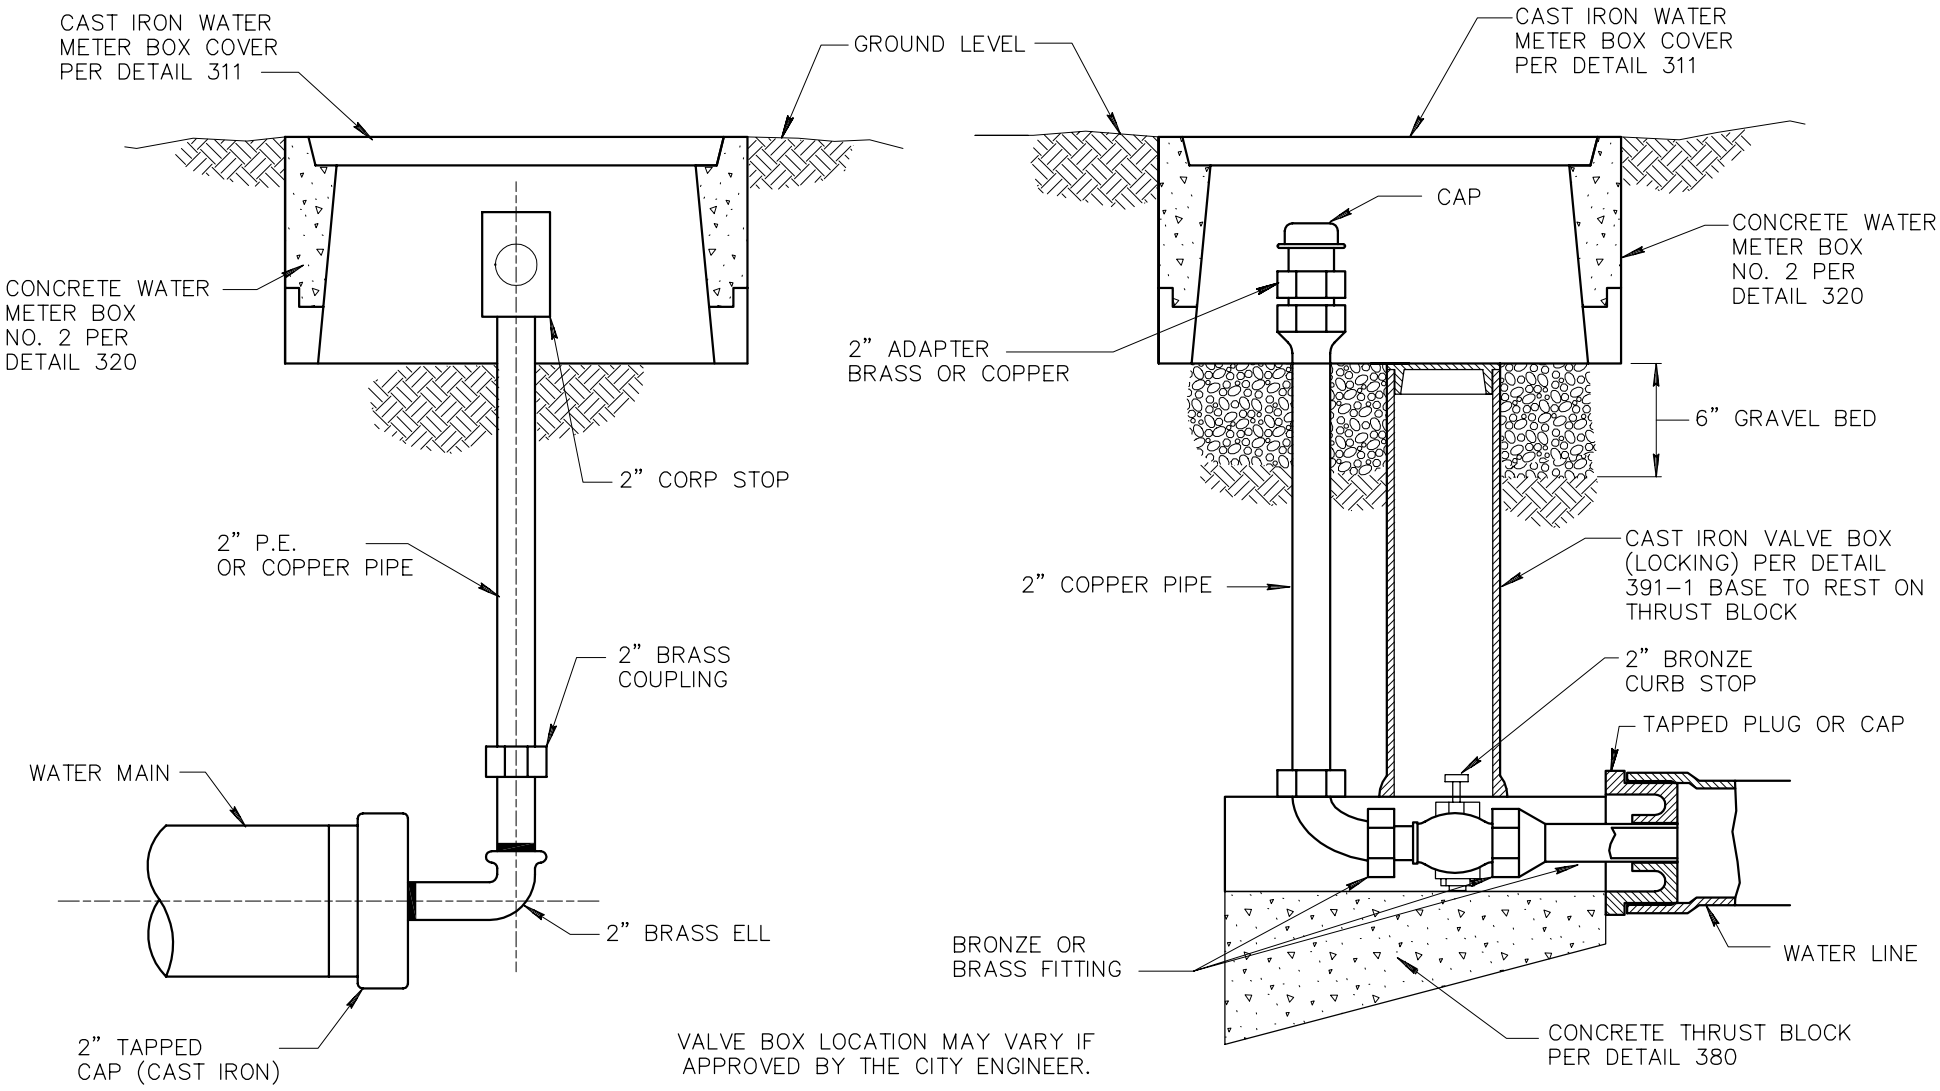

VALVE BOX LOCATION MAY VARY IF APPROVED BY THE CITY ENGINEER.

DETAIL NO.			REVISED	DETAIL NO.
390	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CURB STOP WITH FLUSHING PIPE		390

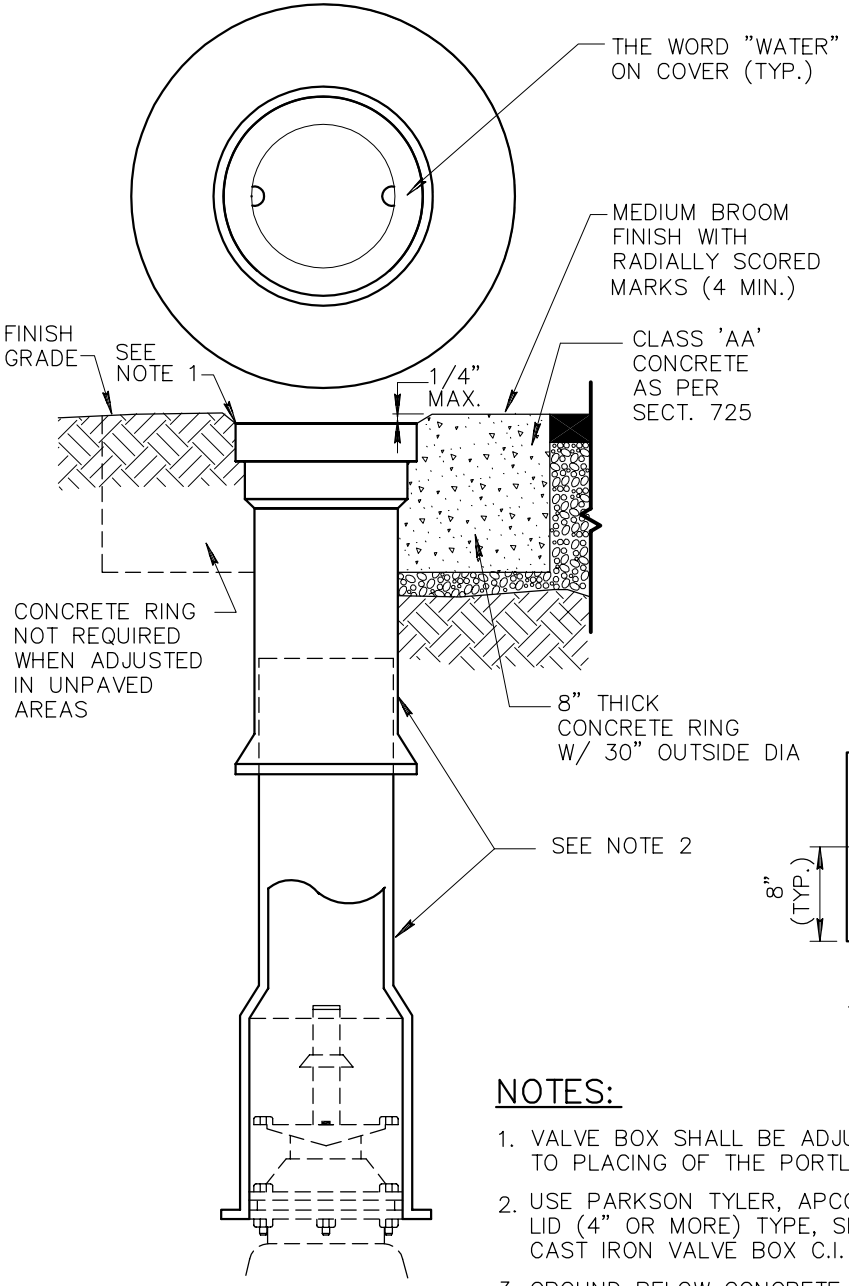

TYPE 'C'



VIEW A–A

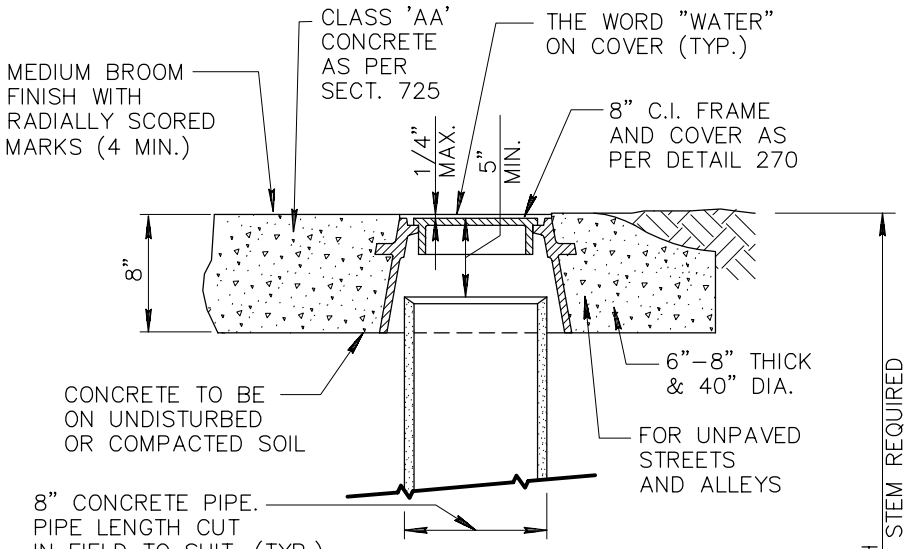

TYPE 'A'

(TO BE USED IN AREAS SUBJECT TO VEHICULAR TRAFFIC.)

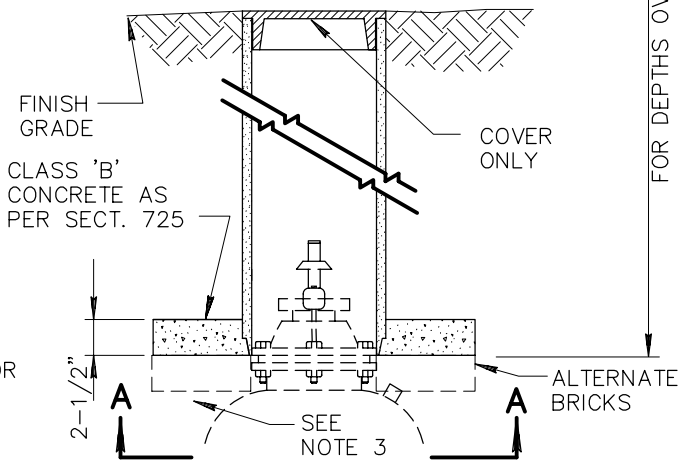

TYPE 'B'

(NOT SUBJECT TO VEHICULAR TRAFFIC)

NOTES:

1. VALVE BOX SHALL BE ADJUSTED TO THE FINISHED GRADE PRIOR TO PLACING OF THE PORTLAND CEMENT CONCRETE SURFACE.
2. USE PARKSON TYLER, APCO OR EQUAL DEEP SKIRTED LID (4" OR MORE) TYPE, SLIDING ADJUSTABLE CAST IRON VALVE BOX C.I. MIN. T.S. 30,000 P.S.I.
3. GROUND BELOW CONCRETE PAD OR 3 BRICKS TO BE COMPACTED 95% OF MAX. DENSITY.

DETAIL NO.			REVISED	DETAIL NO.
391-1	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	VALVE BOX INSTALLATION AND GRADE ADJUSTMENT	01-01-2001	391-1

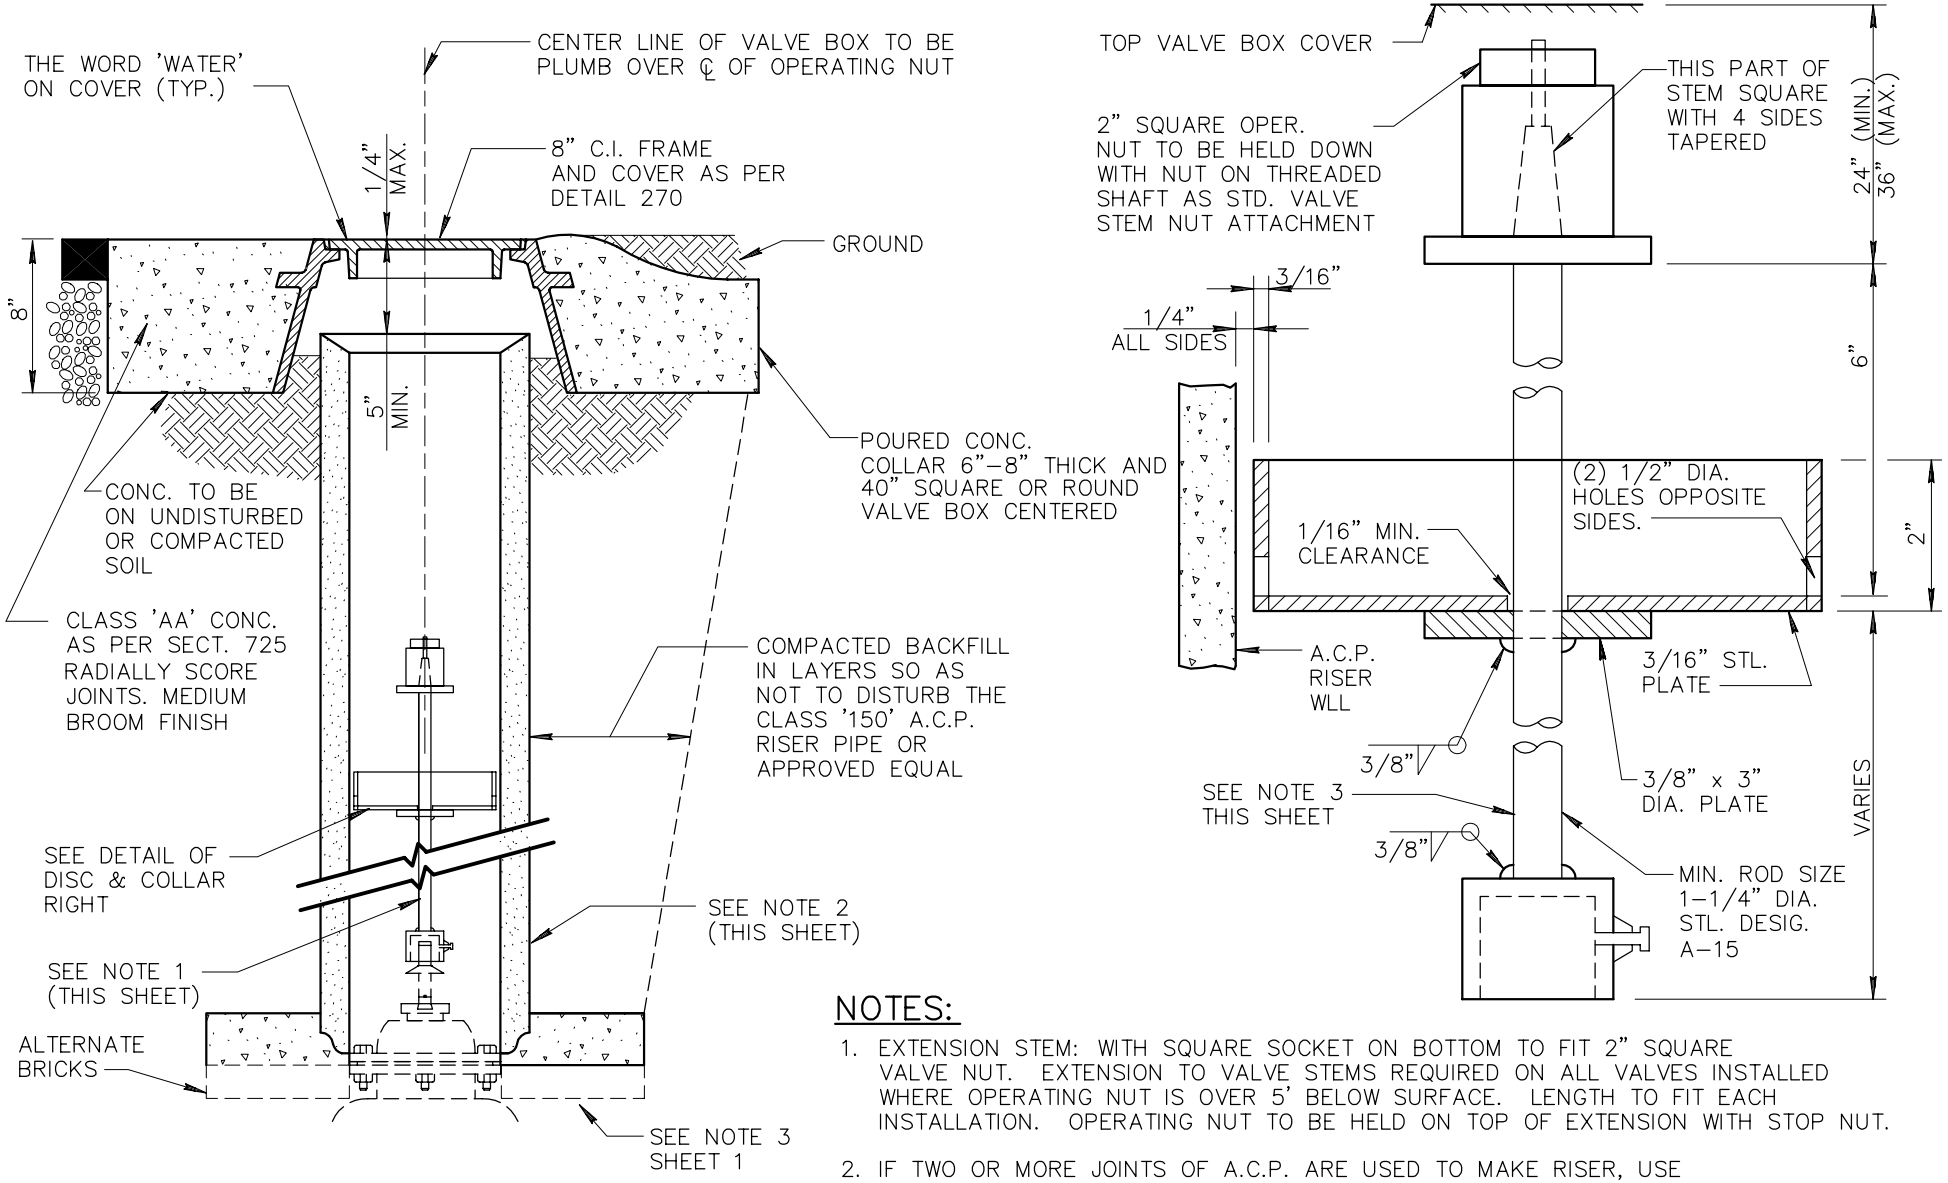

NOTES:

1. EXTENSION STEM: WITH SQUARE SOCKET ON BOTTOM TO FIT 2" SQUARE VALVE NUT. EXTENSION TO VALVE STEMS REQUIRED ON ALL VALVES INSTALLED WHERE OPERATING NUT IS OVER 5' BELOW SURFACE. LENGTH TO FIT EACH INSTALLATION. OPERATING NUT TO BE HELD ON TOP OF EXTENSION WITH STOP NUT.
2. IF TWO OR MORE JOINTS OF A.C.P. ARE USED TO MAKE RISER, USE STANDARD A.C. PIPE RUBBER GASKET COUPLING TO JOIN PIPE. WHERE RISER LENGTH EXCEEDS 10' USE 12" A.C. PIPE.
3. STEM PAINTING: ALL STEEL TO HAVE PRIME COAT OF PAINT NO. 1–D AND ONE HEAVY APPLICATION (FINISH COAT) OF PAINT NO. 9 AS PER SECT. 790.

DETAIL NO.			REVISED	DETAIL NO.
391-2	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**VALVE BOX INSTALLATION AND GRADE ADJUSTMENT**	01-01-2001	391-2

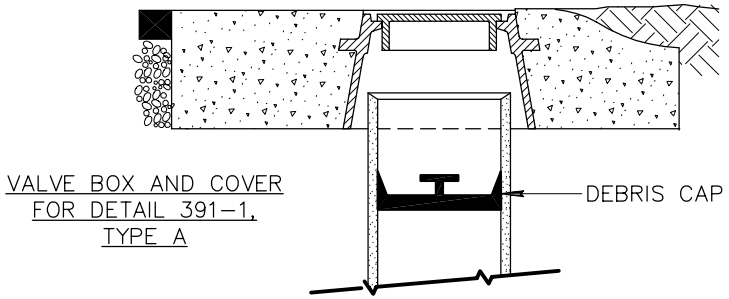

TYPE 'A'

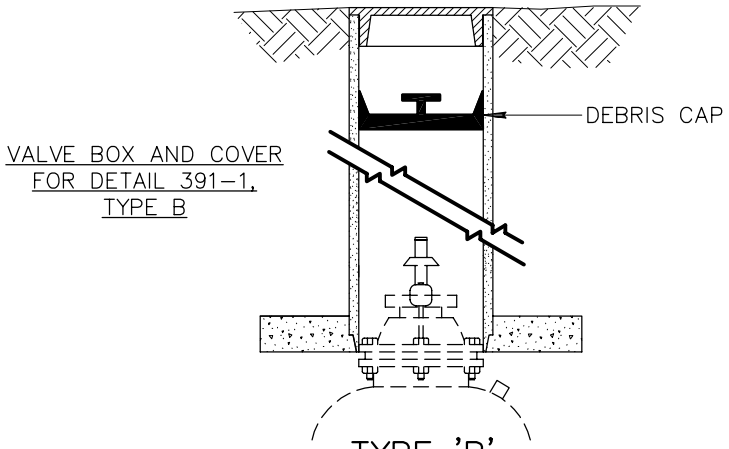

TYPE 'B'

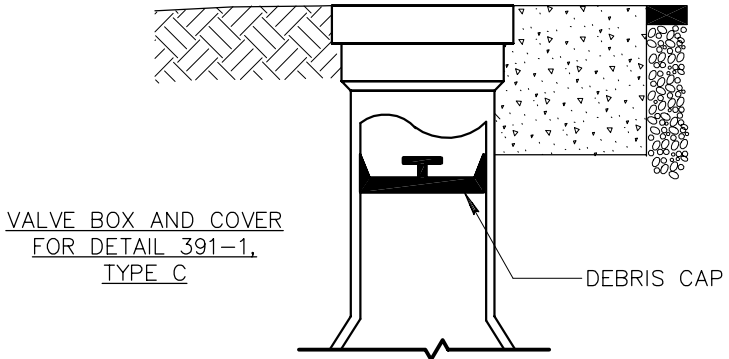

TYPE 'C'

NOTES:

1. THE DEBRIS CAP SHALL BE DESIGNED AND INSTALLED TO PREVENT DEBRIS SUCH AS DIRT, DUST SAND, ETC., FROM PASSING AROUND THE CAP AND DOWN INTO THE VALVE HOUSING. THE CAP SHALL BE HELD IN PLACE BY A MECHANISM WHICH WILL NOT DAMAGE THE VALVE HOUSING. ONCE INSTALLED THE CAP MUST WITHSTAND, WITHOUT SLIPAGE, A MINIMUM VERTICAL FORCE OF 50 POUNDS AT A LOADING RATE OF 1 INCH/MINUTE.
2. THE CAP SHALL BE MANUFACTURED OF CORROSIVE RESISTANT MATERIALS.
3. DEBRIS CAP SHALL BE INSTALLED AS CLOSE UNDER THE CAST IRON COVER WITHOUT INTERFERING WITH COVER OPERATION.
4. THE CAP SHALL BE CAPABLE OF SECURELY HOLDING A STANDARD LOCATING COIL, "SCOTCH MARK" 4 DISK MARKER BY 3M OR EQUAL.
5. THE CAP SHALL BE CONSTRUCTED TO ALLOW THE DEVICE TO BE SECURED BY A LOCK. THE LOCK (PAD, BARREL, ETC.) SHALL BE SUPPLIED BY THE AGENCY.
6. THE HANDLE AND/OR BODY OF THE CAP SHALL BE INTEGRALLY COLORED IF REQUIRED BY THE AGENCY. IF REQUIRED, THE COLOR SHALL CONFORM TO THE ONE CALL LOCATING SERVICE (BLUE STAKE) COLORS (ARS 40–360.21).
7. THE CAP SHALL BE INSTALLED IN ALL VALVE HOUSINGS AS REQUIRED BY THE CONTRACT DOCUMENTS OR BY THE AGENCY'S POLICIES.
8. THE DEBRIS CAP SHALL BE MANUFACTURED BY SW SERVICES, INC. PHOENIX, ARIZONA OR EQUAL.

DETAIL NO.			REVISED	DETAIL NO.
392	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	DEBRIS CAP INSTALLATION	01-01-2001	392

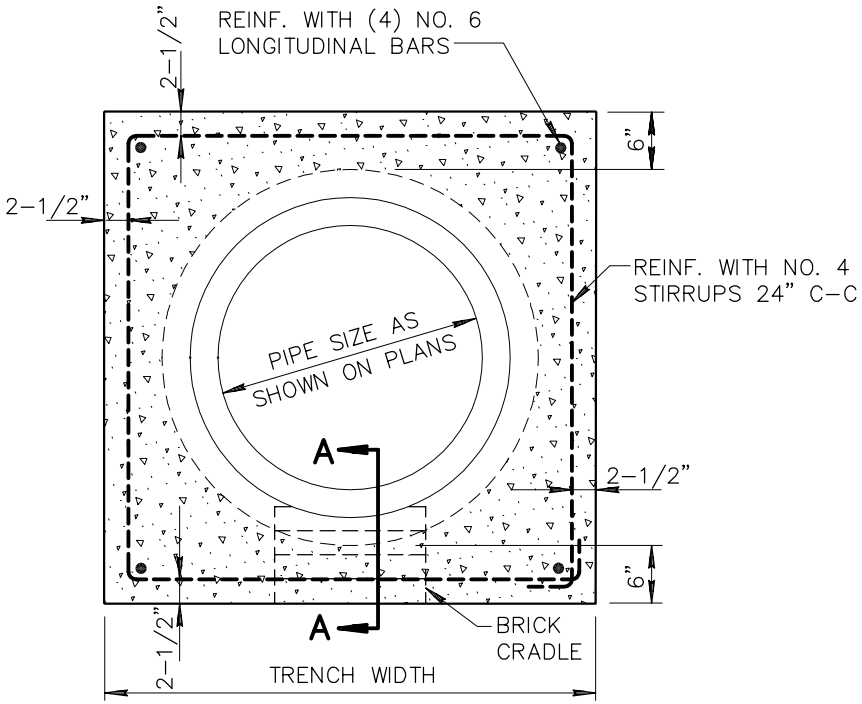

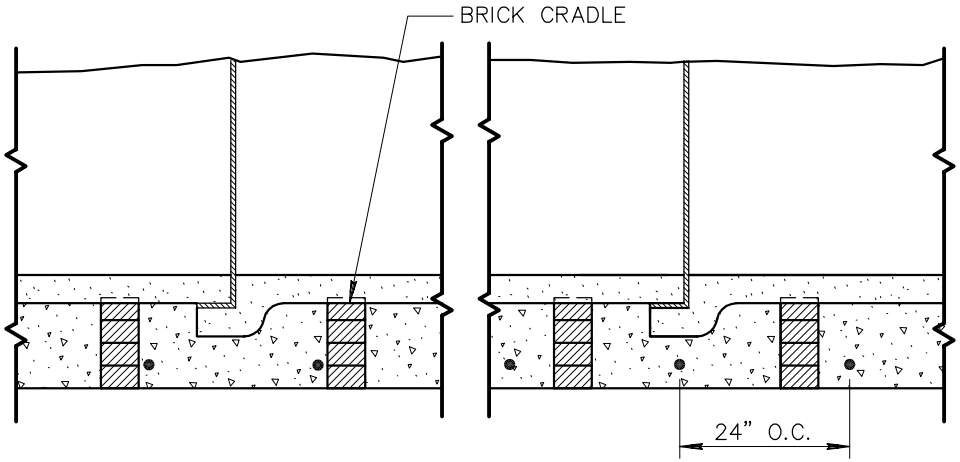

SECTION A-A

NOTES:

1. LAY PIPE TO LINE AND GRADE ON BRICK CRADLE.
2. PLACE CLASS 'C' CONCRETE PER SECT. 725 & 505, IN SUCH A MANNER AS NOT TO FLOAT THE PIPE.

DETAIL NO.			REVISED	DETAIL NO.
402	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	ENCASED PIPE FOR CANAL CROSSINGS		402

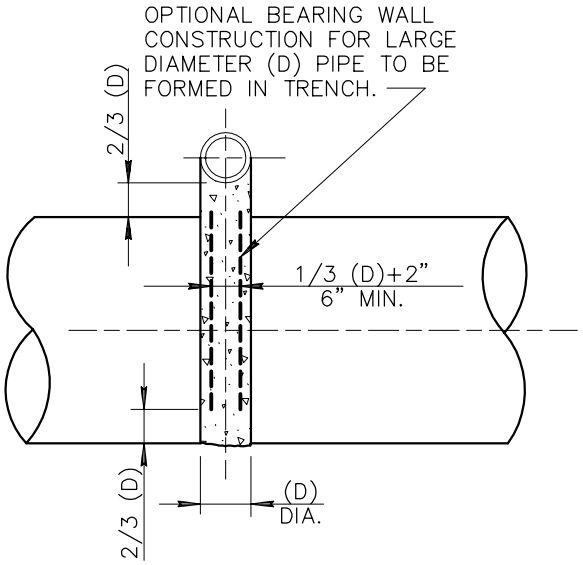

SECTION A–A

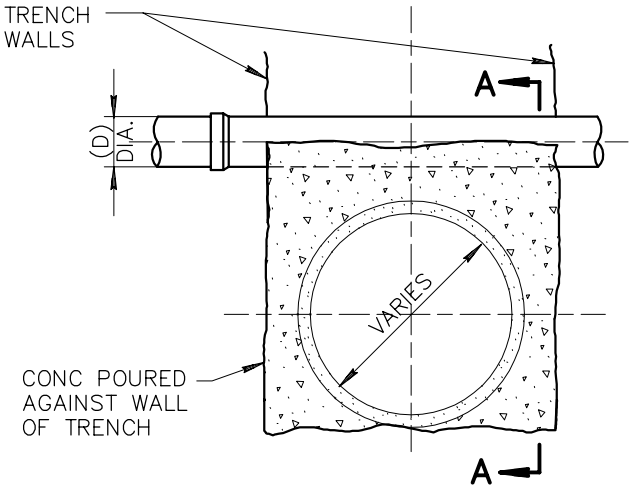

PIPE CONDUIT

TYPE 'A'

NOTES:

1. TYPE 'A' PIPE SUPPORT MAY BE USED FOR ANY TYPE CROSSING CONDITION.
2. TYPE 'C' PIPE SUPPORT MAY BE USED FOR CROSSING PIPES WITH A BELL DIAMETER OF 18" OR LESS IF SUFFICIENT CLEARANCE OVER STORM SEWER IS AVAILABLE AND TOTAL SPAN IS LESS THAN 34'
3. INTERMEDIATE PIPE SUPPORT SHALL BE USED IN CONJUNCTION WITH TYPE 'C' PIPE SUPPORT IF TOTAL SPAN EXCEEDS MAX. 'W' IN TABLE.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR FURNISHING ALL SUPPORTS BOTH PERMANENT AND TEMPORARY. TEMPORARY SUPPORTS SHALL NOT BE A SEPARATE PAY ITEM.
5. PERMANENT PIPE SUPPORTS MAY BE DECREASED FROM PLAN QUANTITIES OR EXTENDED TO INCLUDE SOME LISTED BELOW AS TEMPORARY SUPPORTS IF CONDITIONS WARRANT THESE CHANGES AT THE TIME OF CONSTRUCTION. DECISION SHALL BE MADE BY THE ENGINEER.
6. WHEN TYPE 'A' PIPE SUPPORT IS USED AND WHENEVER SO DIRECTED BY THE ENGINEER, THE CONTRACTOR SHALL PIERCE THE WALL WITH SUITABLE OPENINGS TO PREVENT UNEQUAL PRESSURE RESULTING FROM FLOODING OF THE BACKFILL. THE VOLUME OF THE PIERCED OPENING SHALL NOT EXCEED 1/2 THE VOLUME OF THE SUPPORTING WALL.
7. USE TYPE 'B' PIPE SUPPORT INSTEAD OF TYPE 'C' WHEN CLEARANCE IS LESS THAN 'Y' IN TABLE, BETWEEN PIPES.
8. CLASS 'A' CONCRETE AS PER SECT. 725 UNLESS OTHERWISE NOTED.



SECTION B–B

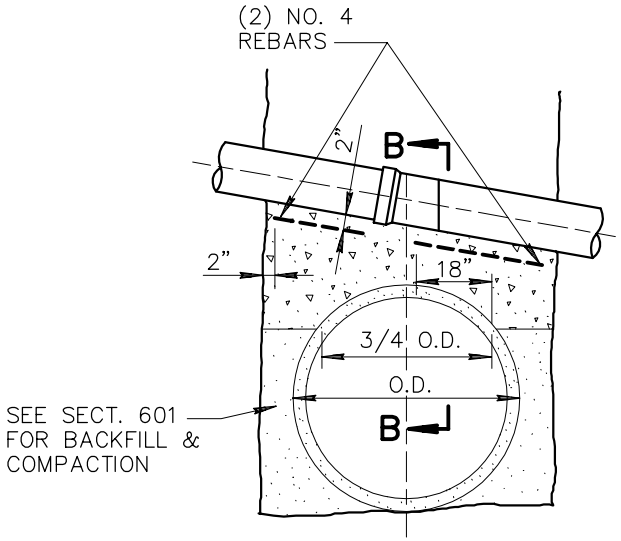

PIPE CONDUIT

TYPE 'B'

SCHEDULE OF REQUIRED SUPPORTS

PERMANENT	TEMPORARY
SEWER LINES	CAST IRON PIPE CONC. IRRIG. PIPE
OTHER UTILITIES AS NOTED ON THE PLANS OR AS REQUIRED BY THE ENGINEER AT TIME OF CONSTRUCTION.	BURIED TELCO. GAS PIPES CONC. STORM DRAIN CONC. BOX CULVERT TRAFFIC CONTROL CONDUIT WATER & SEWER LINES

DETAIL NO.			REVISED	DETAIL NO.
403-1	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	PIPE SUPPORT ACROSS TRENCHES		403-1

TABLE				
'W'	DEPTH OF COVER ON SUPPORTS			
	0' TO 8'		8' TO 16'	
	BAR NO.	Y	BAR NO.	Y
TO 6'	5	8"	6	11"
7'	5	9"	6	12"
8'	5	10"	6	13"
9'	6	11"	6	14"
10'	6	12"	7	15"
11'	6	13"	7	16"
12'	6	14"	7	17"
13'	7	15"	7	19"
14'	7	16"	8	20"
15'	7	17"	8	21"
16'	7	18"		
17'	8	19"		

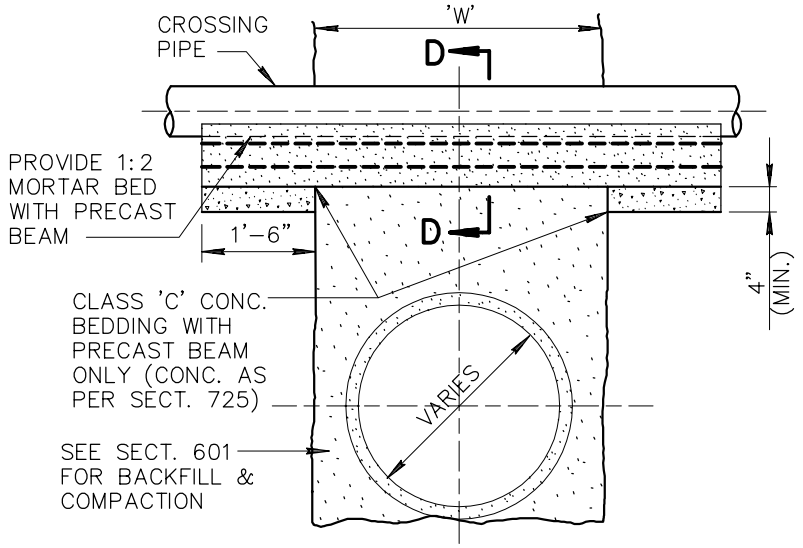

TYPE 'C'

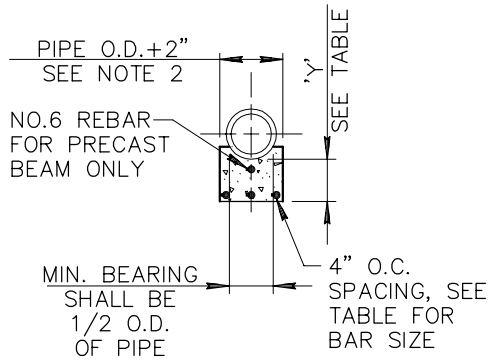

SECTION D–D

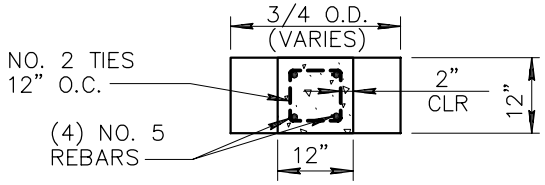

SECTION C–C

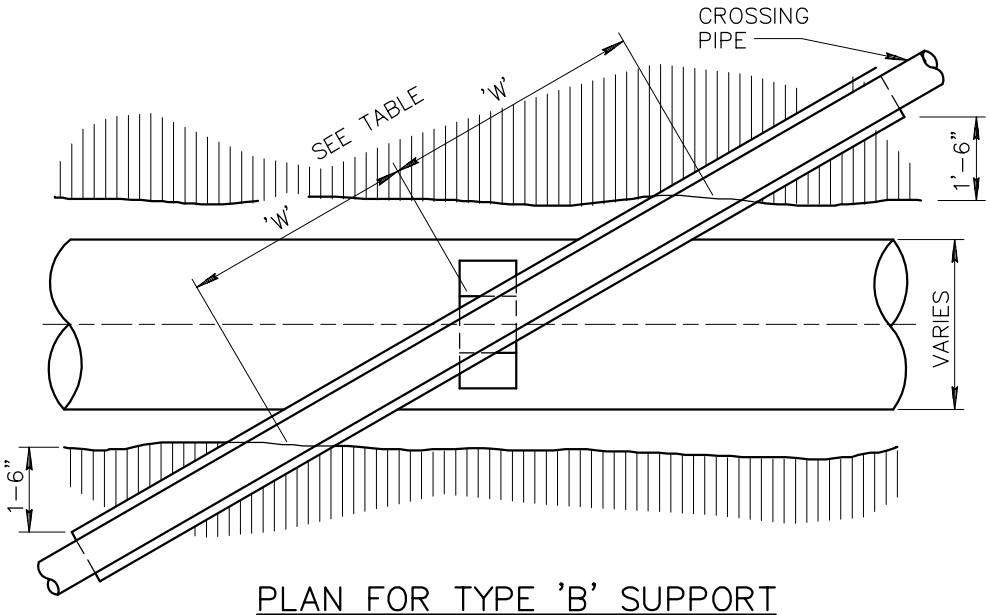

PLAN FOR TYPE 'B' SUPPORT

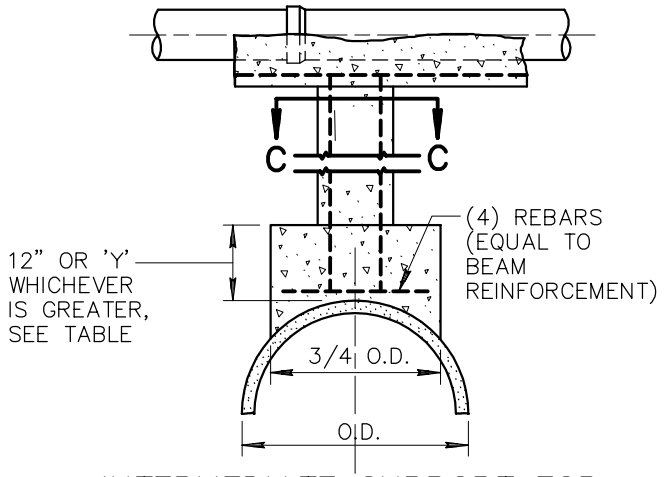

INTERMEDIATE SUPPORT FOR TYPE 'B' CROSSINGS

DETAIL NO.			REVISED	DETAIL NO.
403-2	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	PIPE SUPPORTS ACROSS TRENCHES		403-2

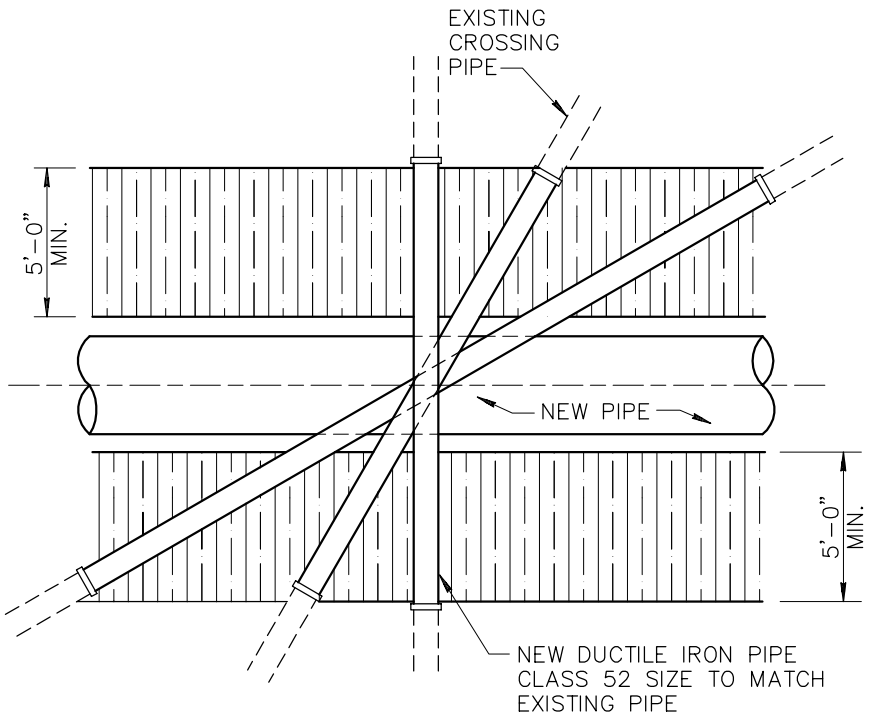

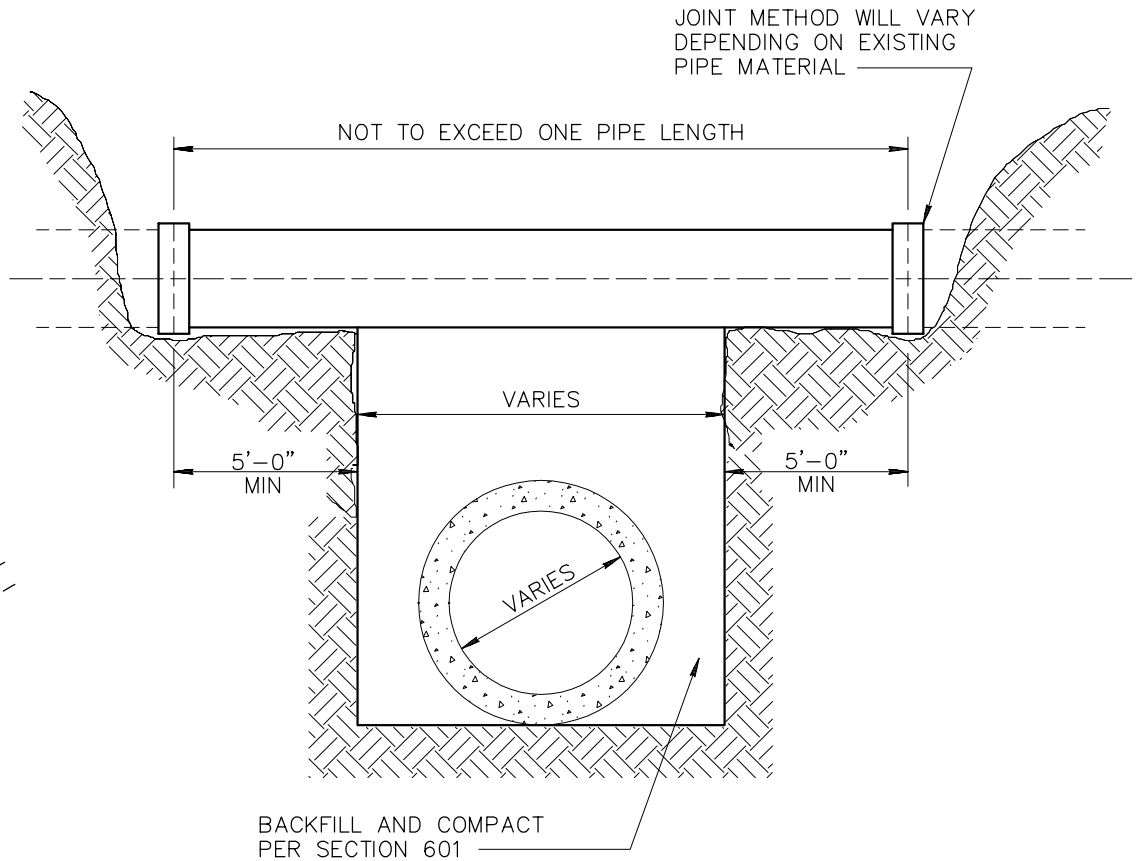

DETAIL NO.			REVISED	DETAIL NO.
403-3	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	ALTERNATE TO PIPE SUPPORT		403-3

WATER LINE EXCLUSION AND EXTRA PROTECTION ZONES*

GRAVITY SANITARY SEWER

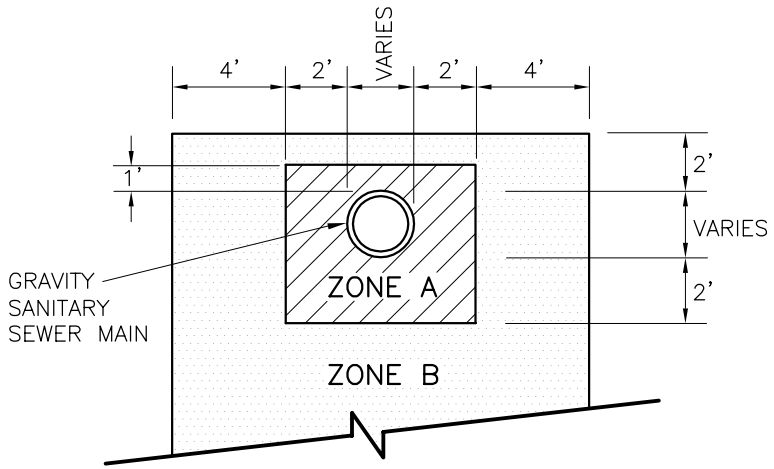

PRESSURIZED SANITARY SEWER

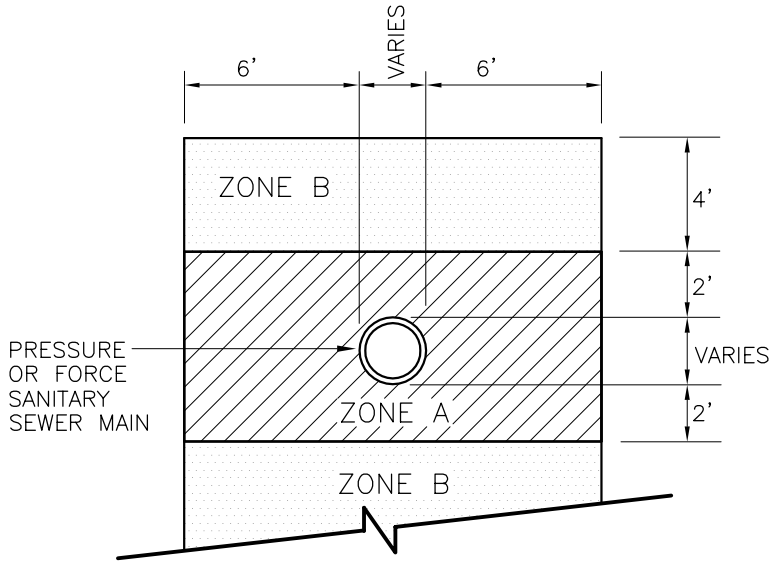

NOTES:

ZONE A: NO WATER LINES ALLOWED/MINIMUM SEPARATION.

ZONE B: EXTRA PROTECTION REQUIRED FOR WATER LINES.

* REFER TO STANDARD 610, WATER LINE CONSTRUCTION.

DETAIL NO.			REVISED	DETAIL NO.
404–1	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	WATER AND SANITARY SEWER SEPARATION/PROTECTION	01–01–2006	404–1

WATER LINE EXTRA PROTECTION

DUCTILE IRON PIPE WITH RESTRAINED OR MECHANICAL JOINTS*

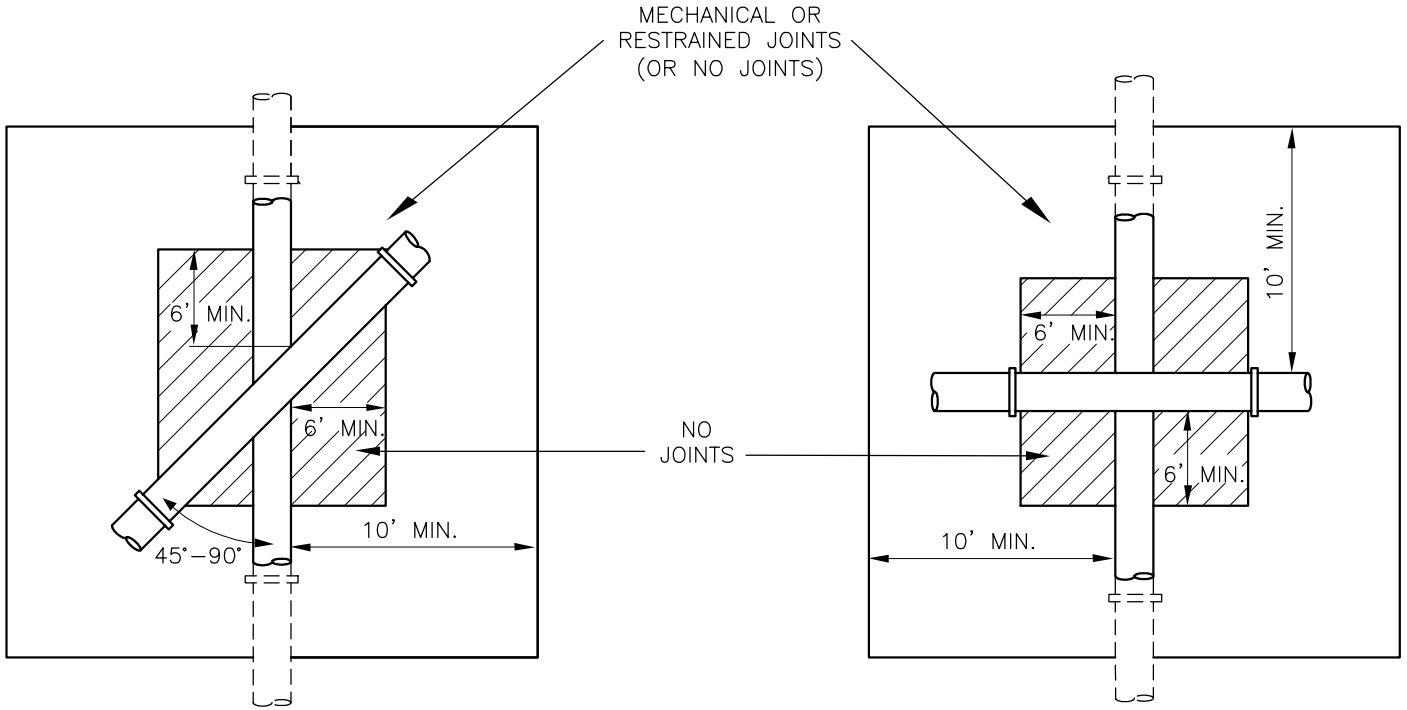

EXTRA PROTECTION DUCTILE IRON PIPE
(GRAVITY OR PRESSURIZED) SEWER LINE

NOTES:

* REFER TO MAG STANDARD SPECIFICATION SECTION 610.

DETAIL NO.			REVISED	DETAIL NO.
404–2	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	WATER AND SANITARY SEWER SEPARATION/PROTECTION	01–01–2006	404–2

ENCASEMENT FOR PIPE CROSSING*

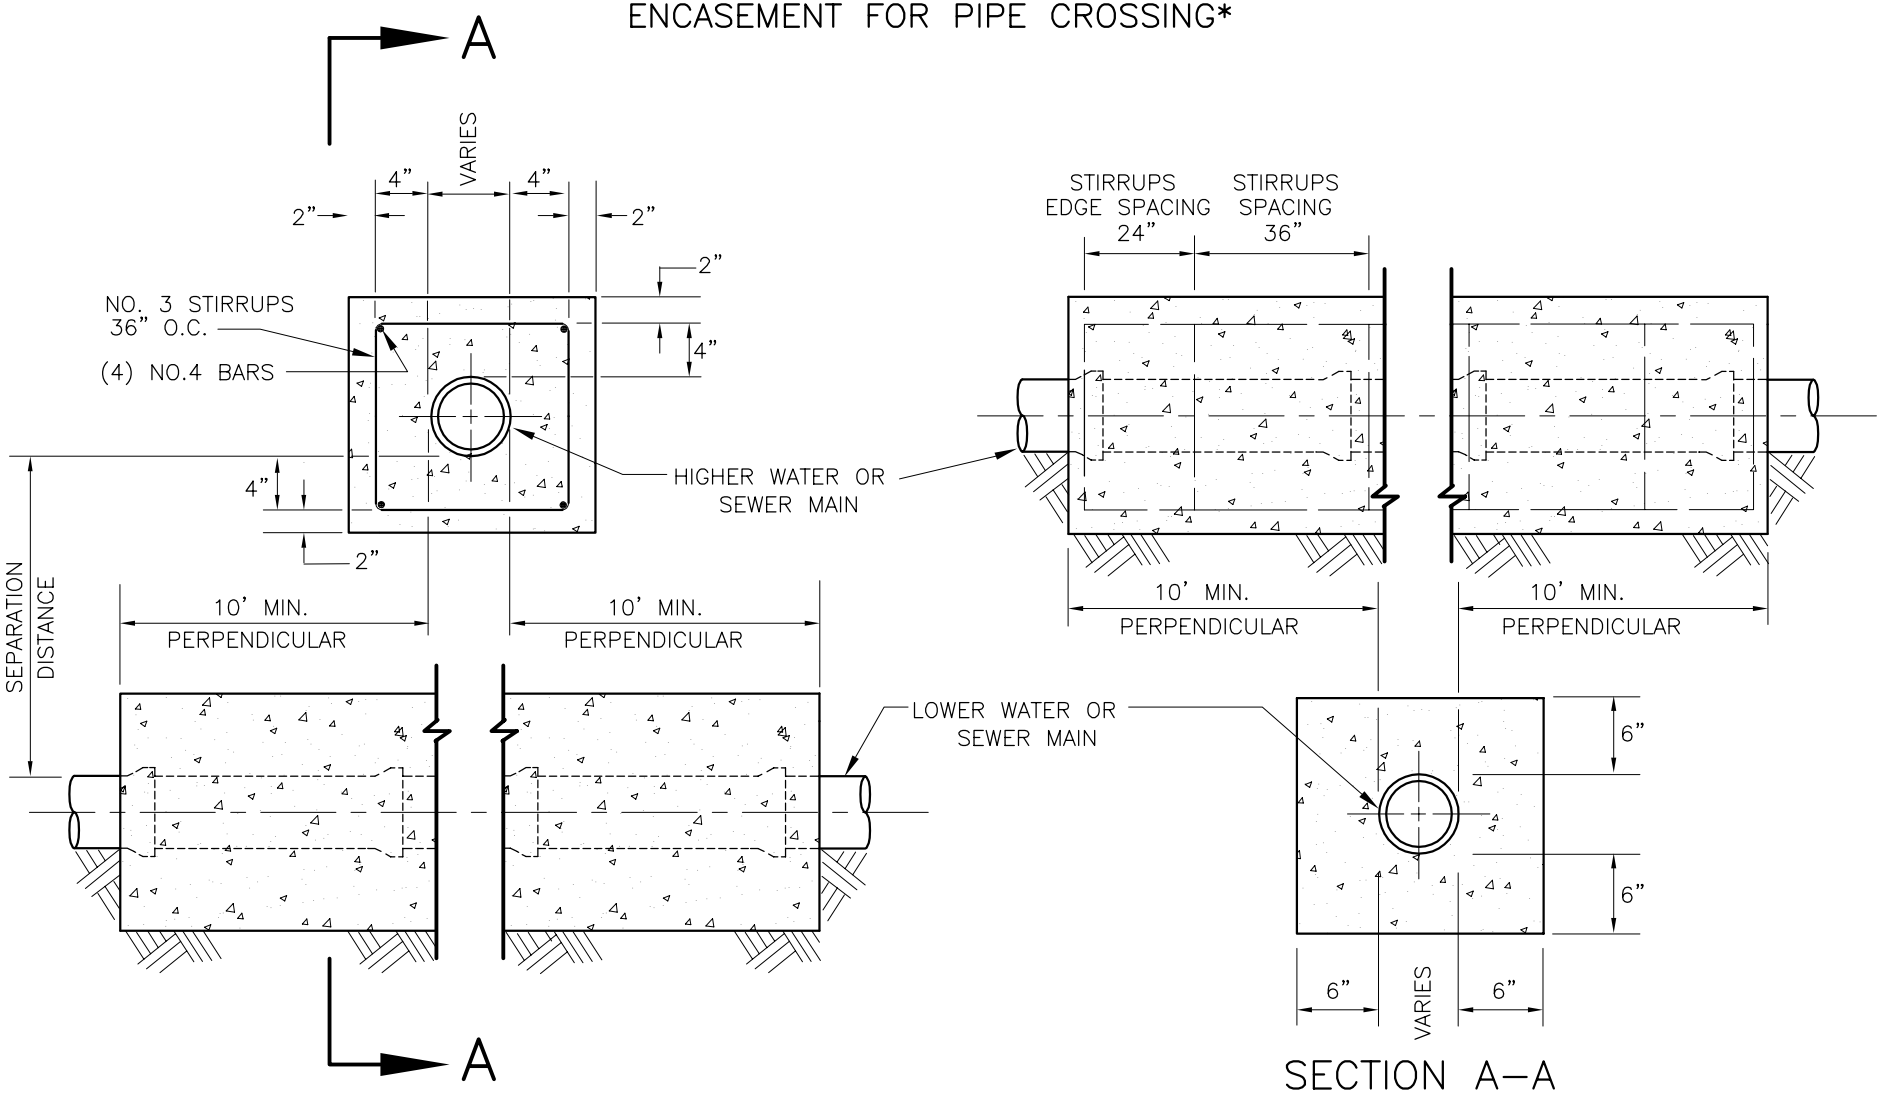

SECTION A–A

NOTES:

1. CLASS 'C' CONCRETE AS PER SECTION 725.

*REFER TO MAG STANDARD SPECIFICATION SECTION 610.

DETAIL NO.			REVISED	DETAIL NO.
404–3	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	WATER AND SANITARY SEWER SEPARATION/PROTECTION	01–01–2006	404–3

This Page Is Reserved for Future Use.

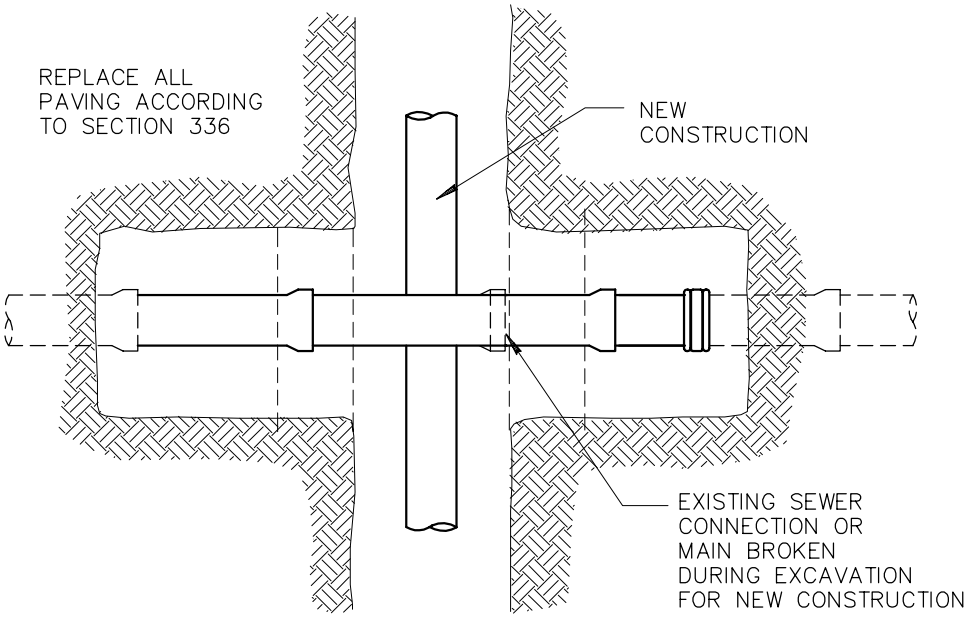

PLAN VIEW OF REPLACEMENT

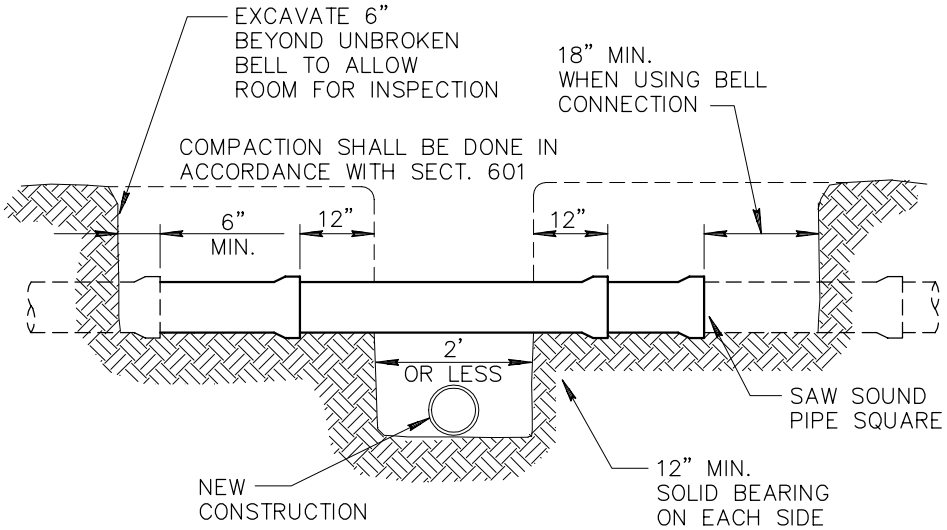

REPLACEMENT WHEN NEW TRENCH
2' WIDE OR LESS

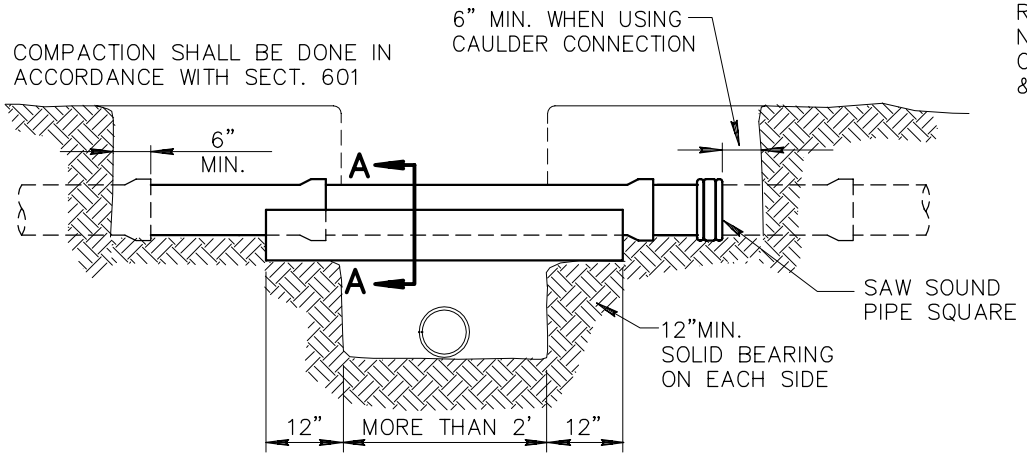

REPLACEMENT WHEN NEW TRENCH
MORE THAN 2' WIDE

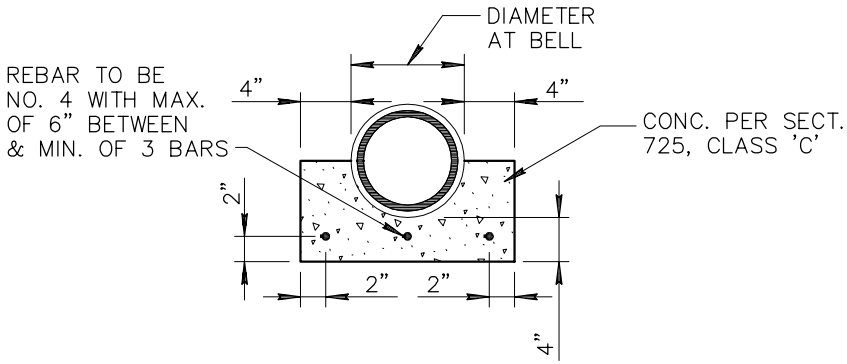

SECTION 'A–A'

NOTES:

1. BROKEN PIPE SHALL BE REPLACED WITH A MINIMUM OF ONE FULL JOINT AND TWO SHORT LENGTHS WITH UNBROKEN BELLS. CONSTRUCTION AND JOINTS TO BE MADE AS PER SECTION 615.

DETAIL NO.			REVISED	DETAIL NO.
405	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	BROKEN SEWER LINE REPLACEMENT		405

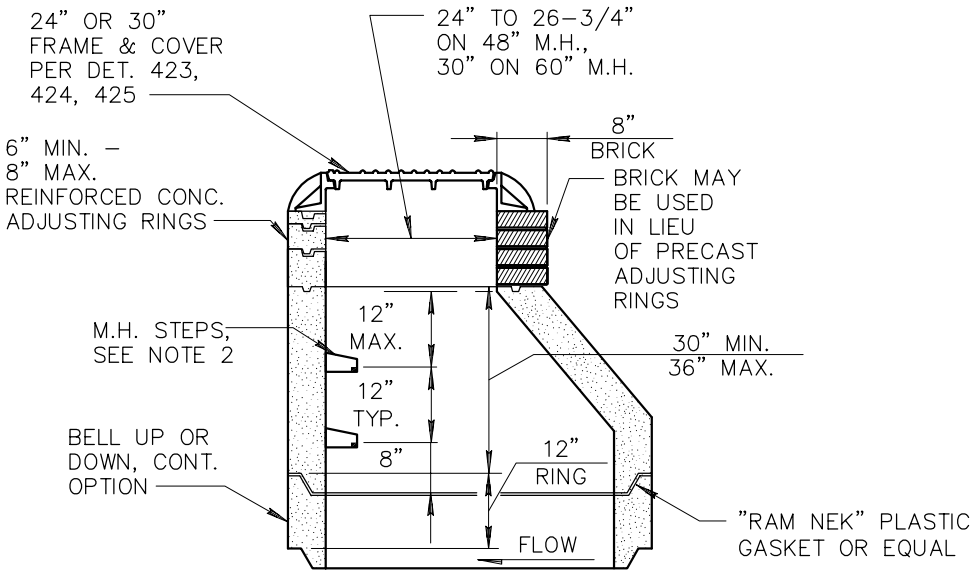

TYPE 'A' TOP

(PRE-CAST ECCENTIC CONICAL TOP M.H.)

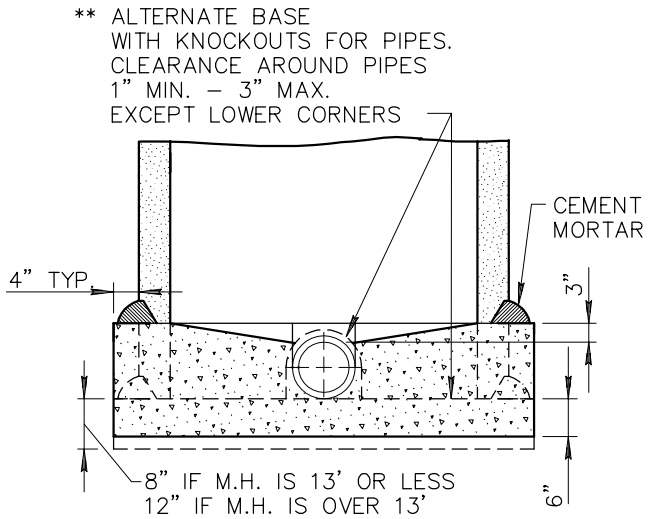

NOTES:

1. PRE-CAST, REINFORCED M.H. SECTIONS SHALL BE MANUFACTURED IN ACCORDANCE WITH A.S.T.M. C-478 EXCEPT AS MODIFIED HEREIN.
2. M.H. STEPS SHALL BE INSTALLED AT SITE OF M.H. SECTION MANUFACTURE. MINIMUM CLEARANCE EACH SIDE OF M.H. LEG SHALL BE 1". STEPS SHALL BE MOUNTED WITH 2 TO 1 SAND/CEMENT DRY PACK MORTAR. (SEE DET. 428 FOR M.H. STEP.)
   STEPS REQUIRED IN 48" DIAMETER MANHOLE.
   STEPS NOT REQUIRED IN 60" DIAMETER MANHOLE.
3. USE LOW ALKALI CEMENT ONLY.

DETAIL NO.			REVISED	DETAIL NO.
420-1	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	PRE-CAST CONCRETE SEWER MANHOLE	01-01-2004	420-1

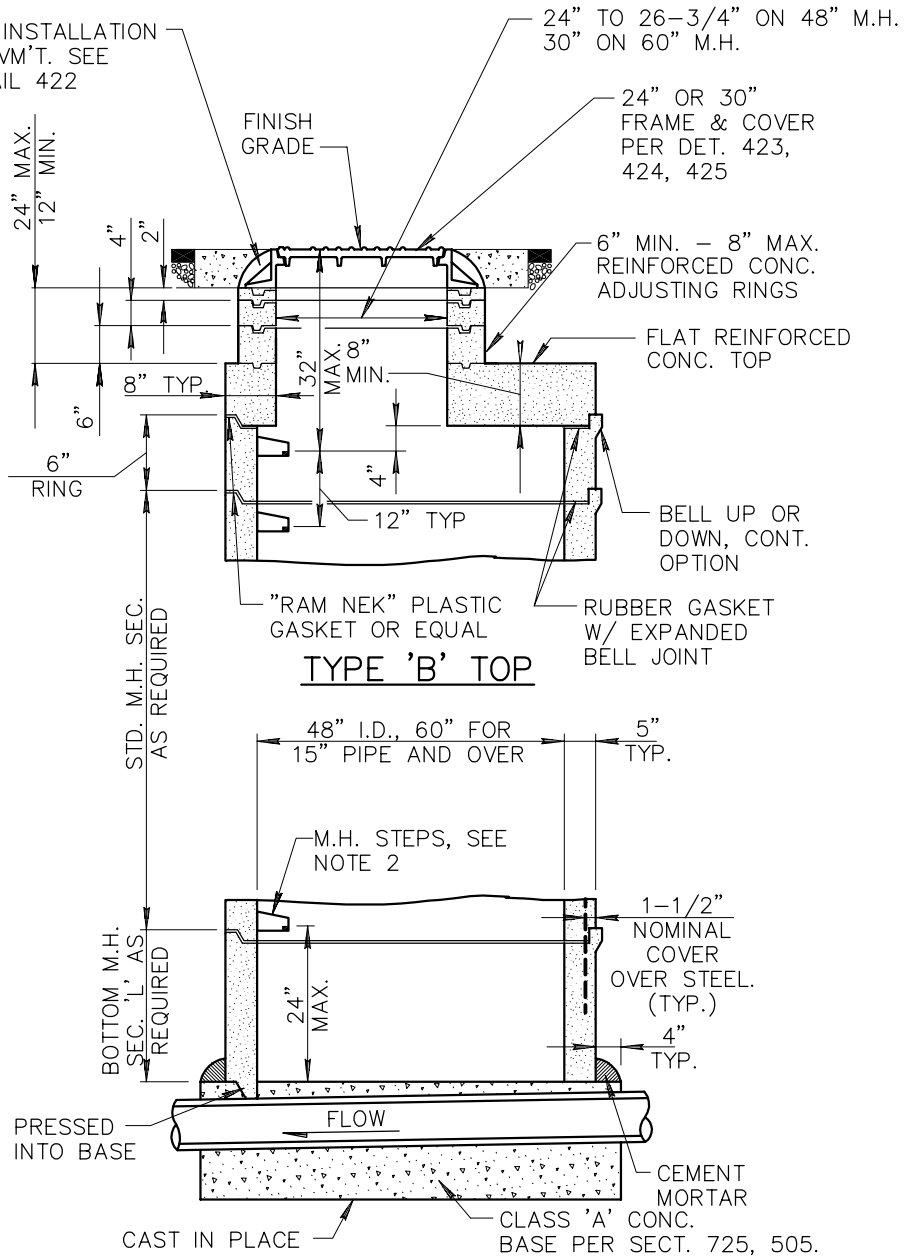

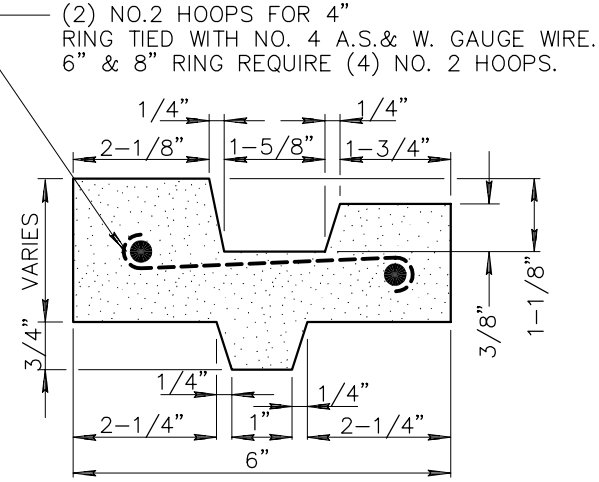

ADJUSTING RING DETAIL

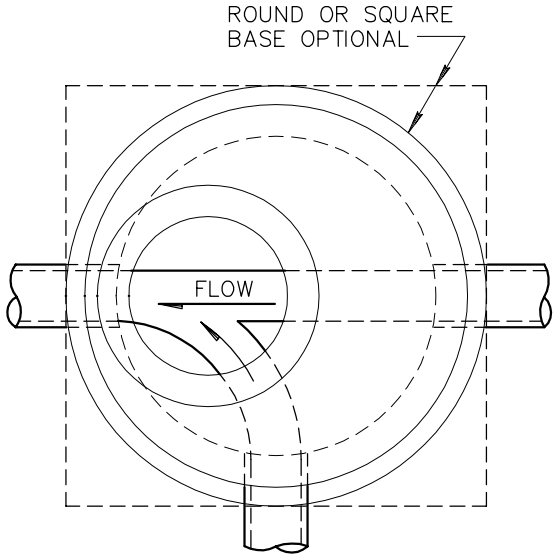

DETAIL NO.				REVISED	DETAIL NO.
420-2	MARICOPA ASSOCIATION of GOVERNMENTS	STANDARD DETAIL ENGLISH	PRE-CAST CONCRETE SEWER MANHOLE	01-01-2001	420-2

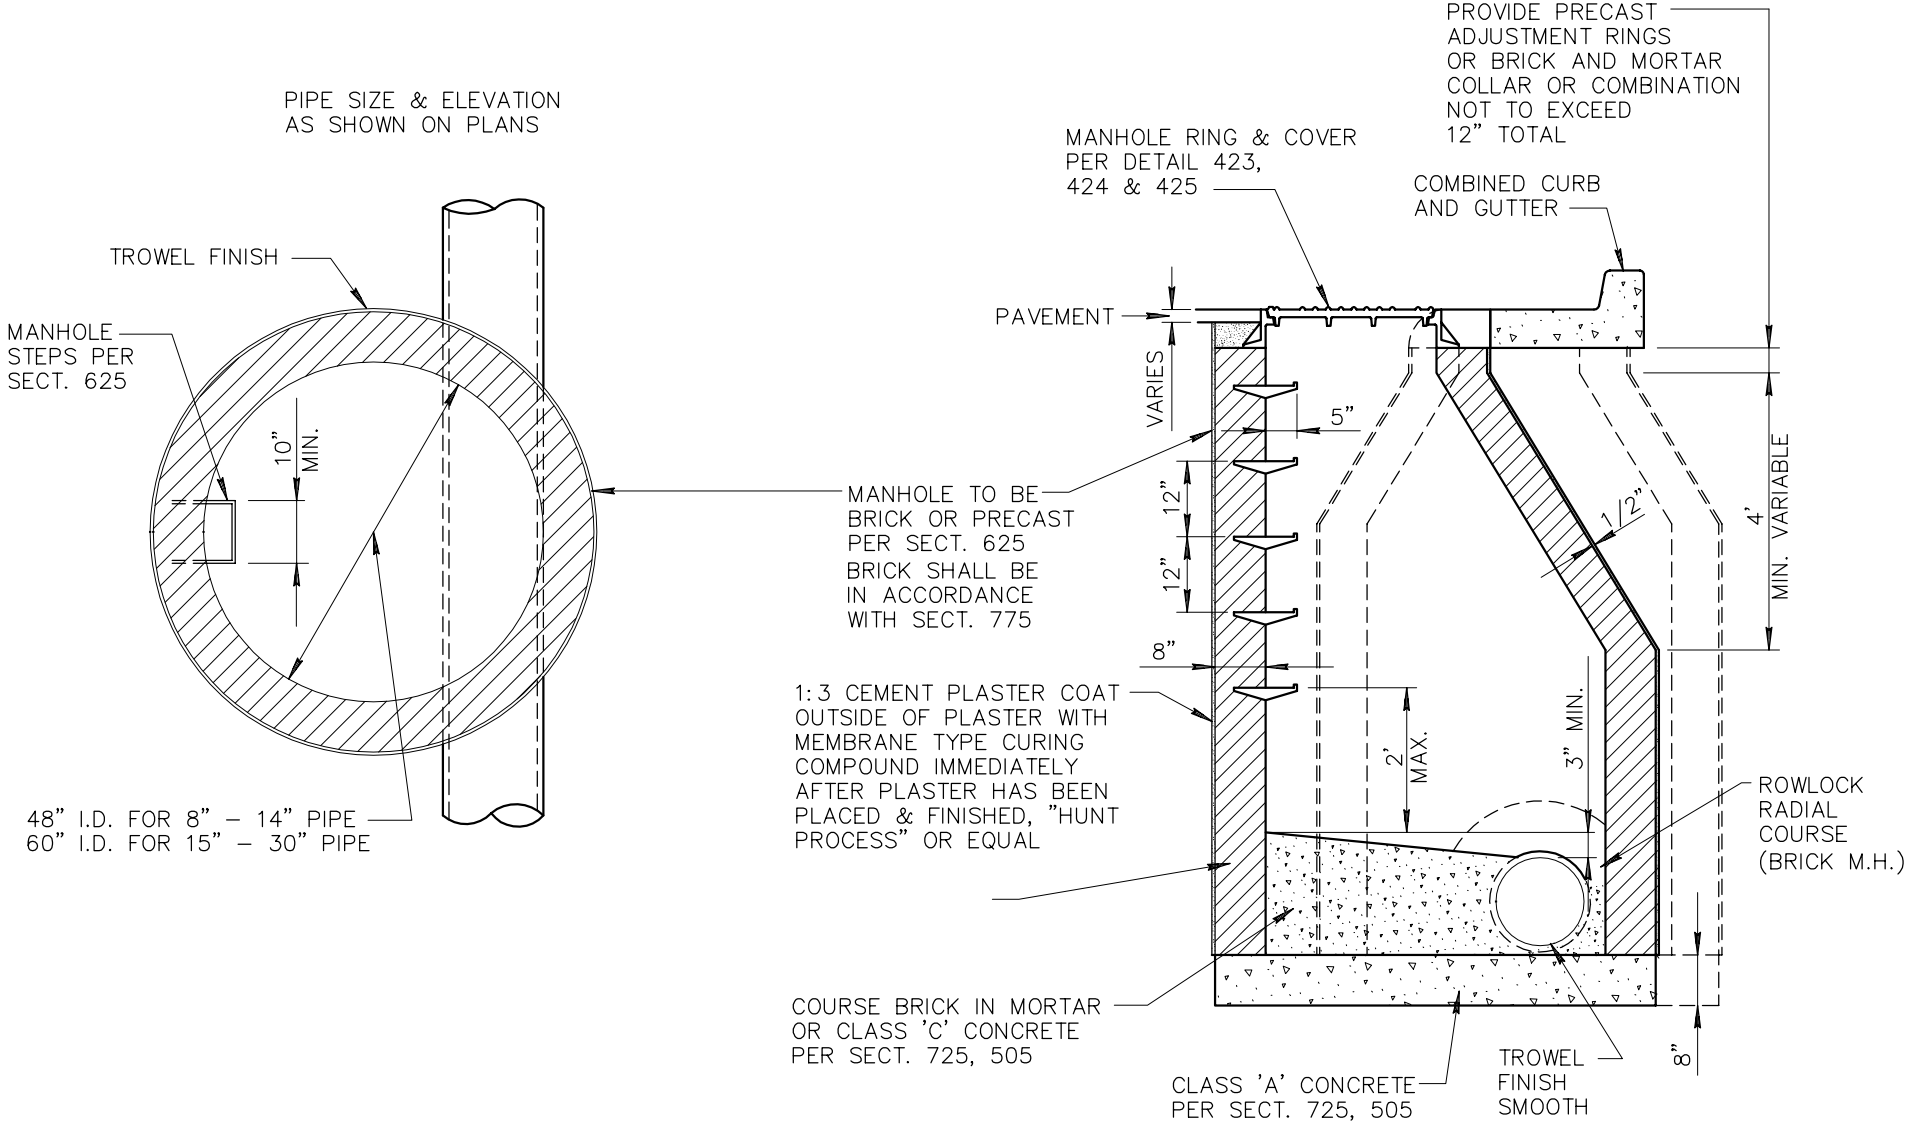

DETAIL NO.			REVISED	DETAIL NO.
421	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**OFFSET MANHOLE 8" TO 30" PIPE**		421

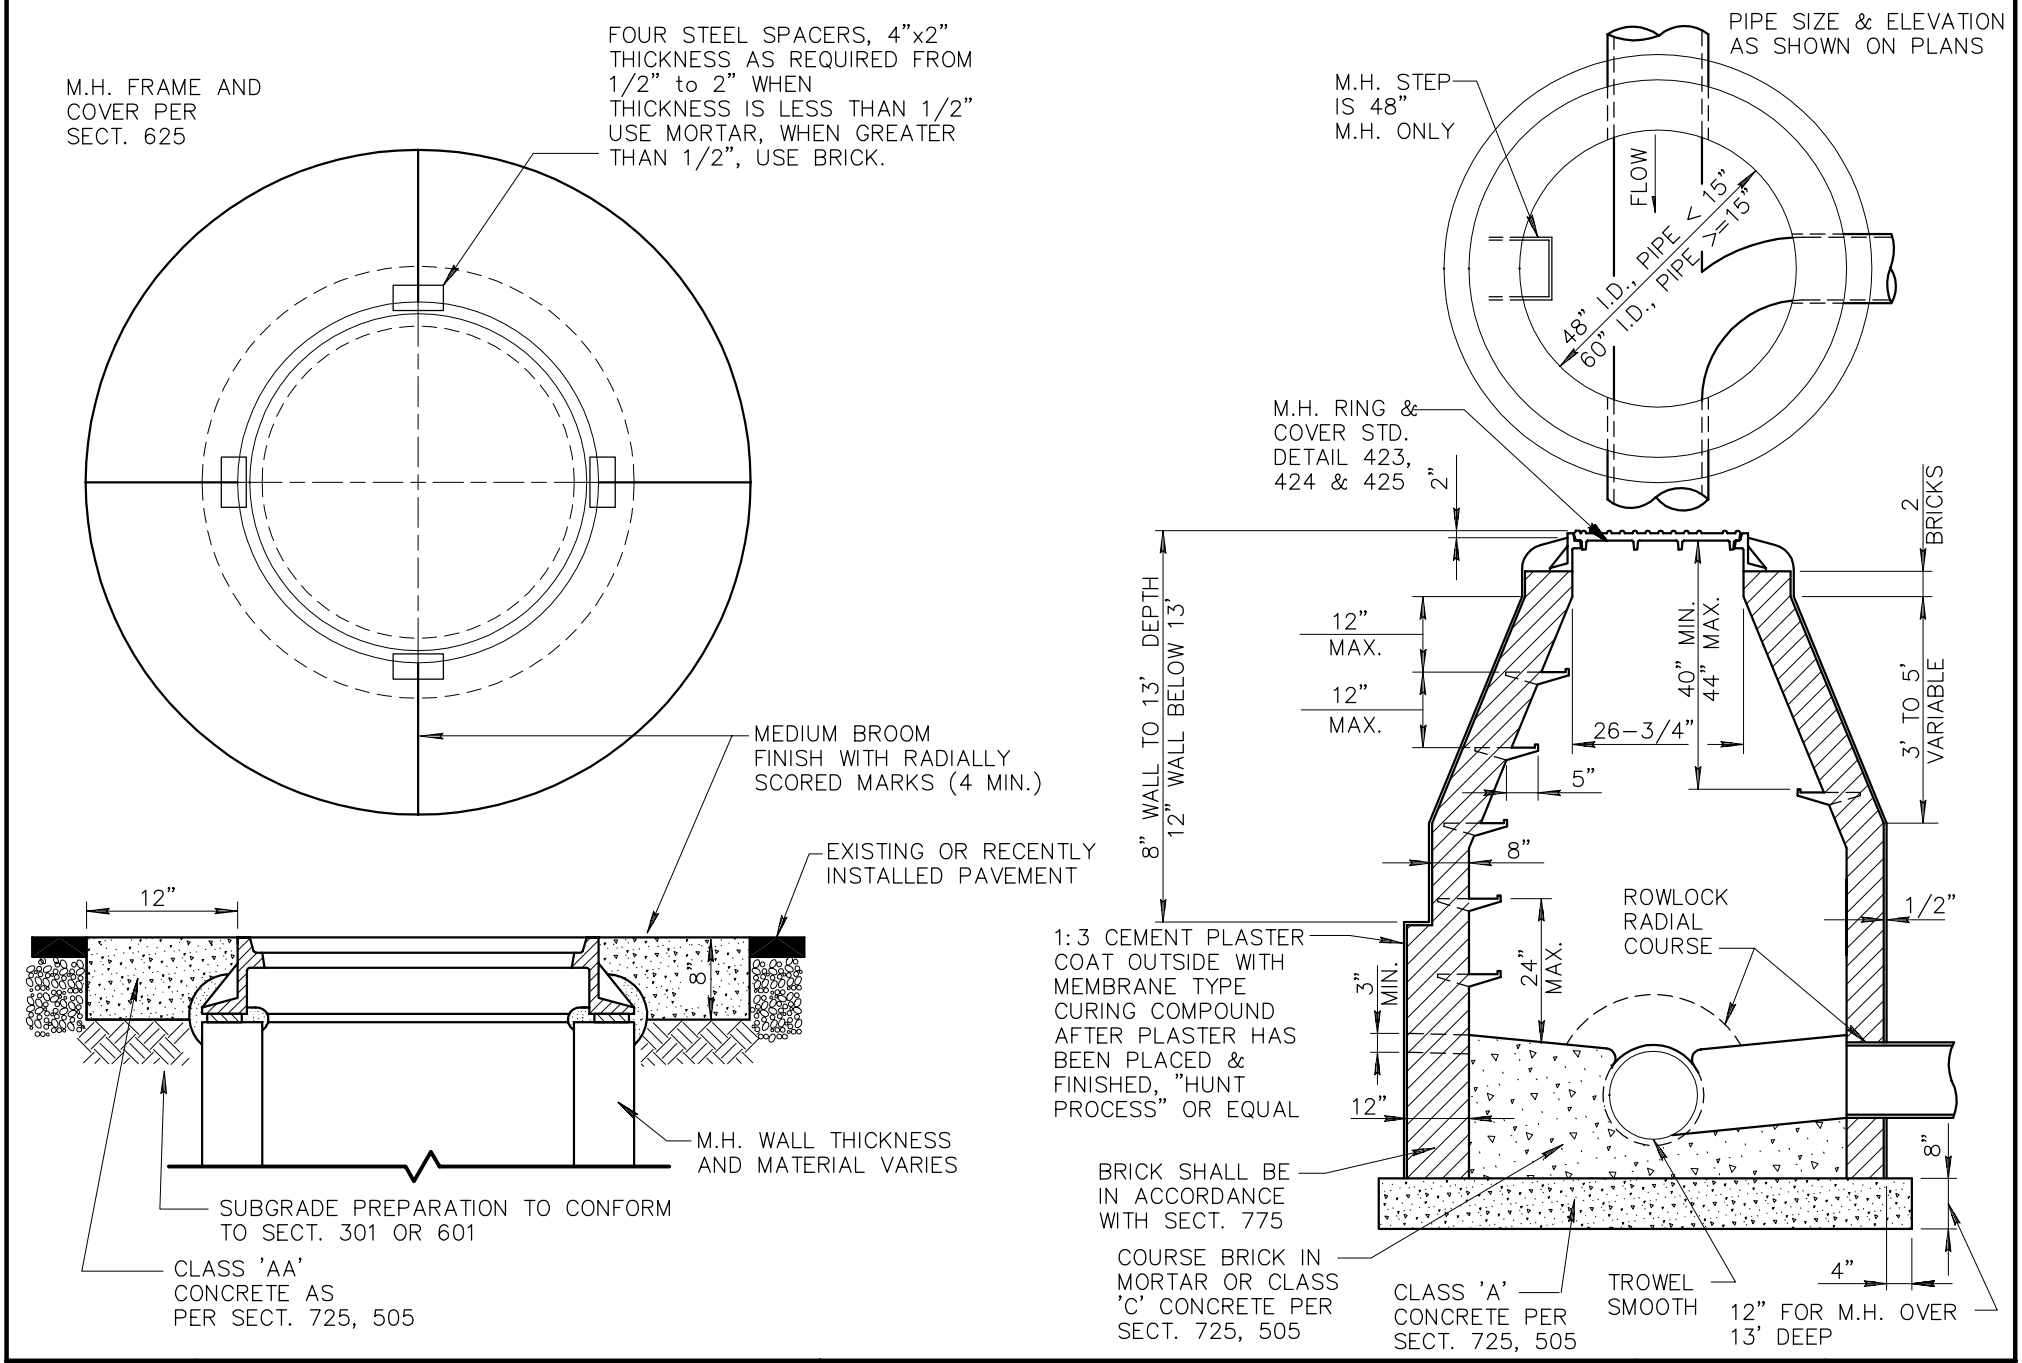

DETAIL NO.				REVISED	DETAIL NO.
422	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	BRICK SEWER MANHOLE AND COVER FRAME ADJUSTMENT		01-01-2001	422

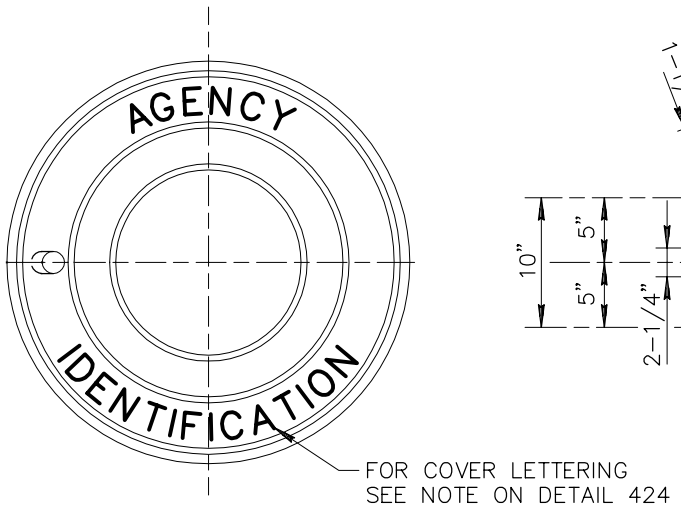

FACE OF COVER
CAST IRON

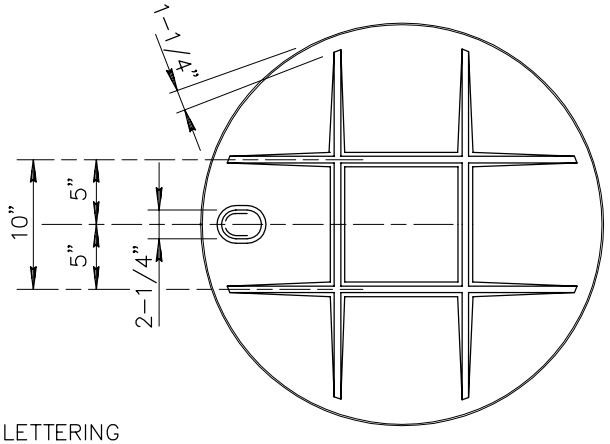

BACK OF COVER

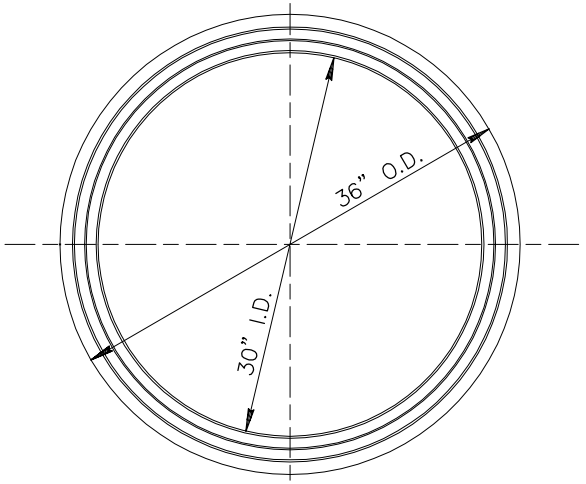

CAST IRON
MANHOLE RING

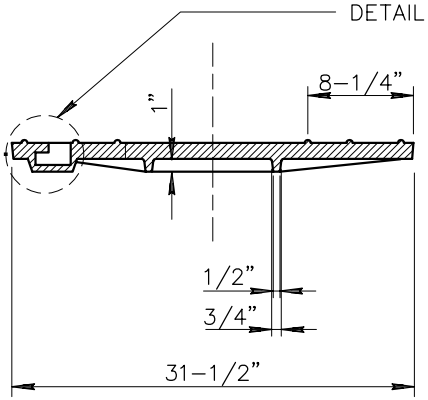

SECTION OF COVER
APPROX. WEIGHT 276 LBS.

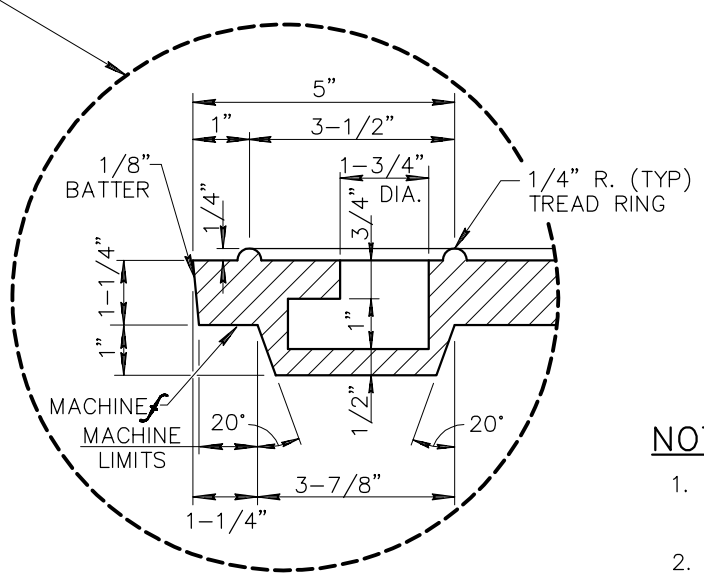

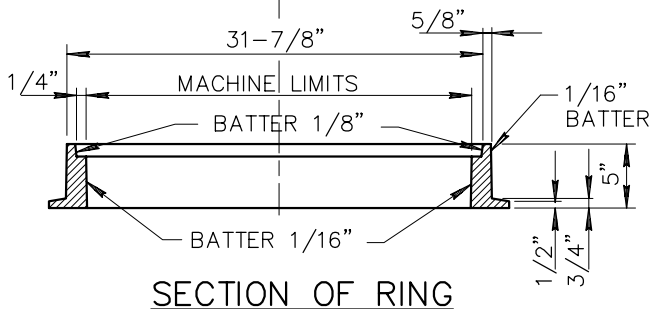

SECTION OF RING
APPROX. WEIGHT 210 LBS.

NOTES:

1. WEIGHT OF CASTING SHALL BE NO MORE THAN 2% LESS THAN THE APPROXIMATE WEIGHT SPECIFIED.
2. CASTINGS SHALL CONFORM TO SECT. 787.

DETAIL NO.			REVISED	DETAIL NO.
423	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	WATER TIGHT 30" MANHOLE FRAME AND COVER		423

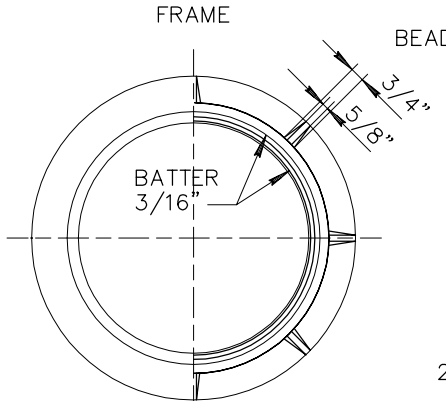

BOTTOM VIEW – TOP VIEW

WT. (CL. 30) – 205 LBS
WT. (CL. 35) – 170 LBS

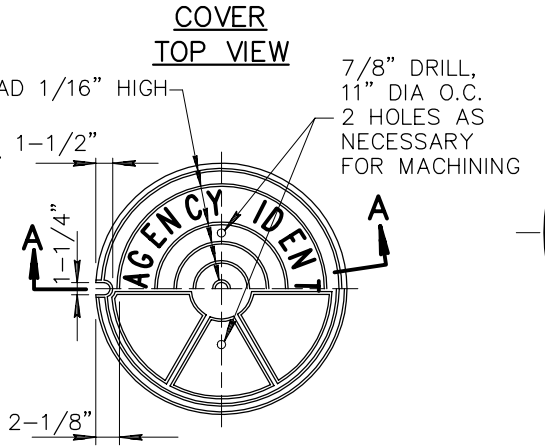

BOTTOM VIEW

WT. (CL. 30) – 200 LBS
WT. (CL. 35) – 180 LBS

24" MANHOLE FRAME AND COVER

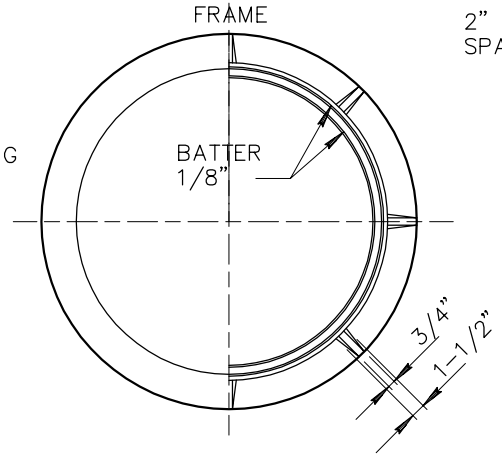

BOTTOM VIEW – TOP VIEW

WT. (CL. 30) – 224 LBS
WT. (CL. 35) – 219 LBS

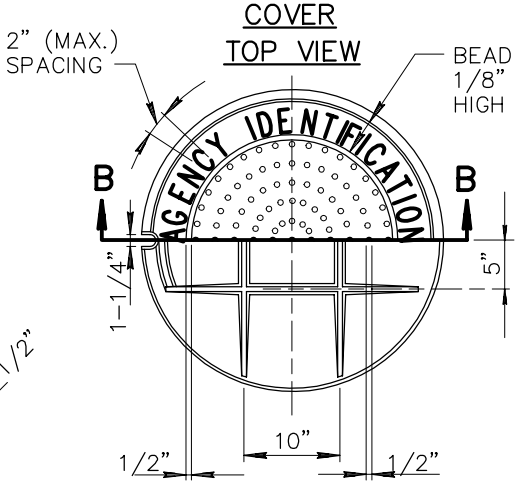

BOTTOM VIEW

WT. (CL. 30) – 324 LBS
WT. (CL. 35) – 207 LBS

30" MANHOLE FRAME AND COVER

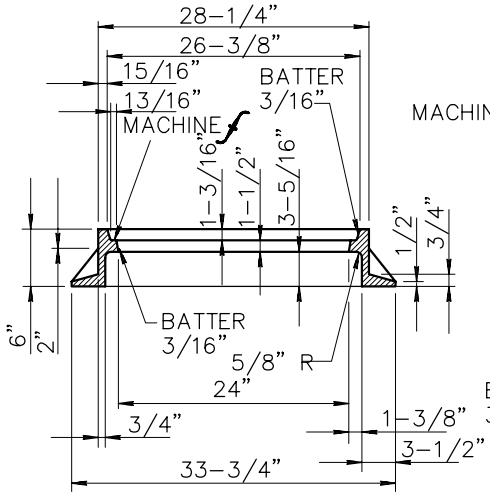

SECTION OF FRAME

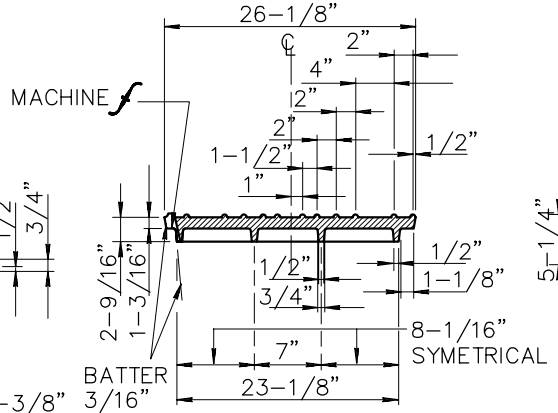

SECTION 'A-A' OF COVER

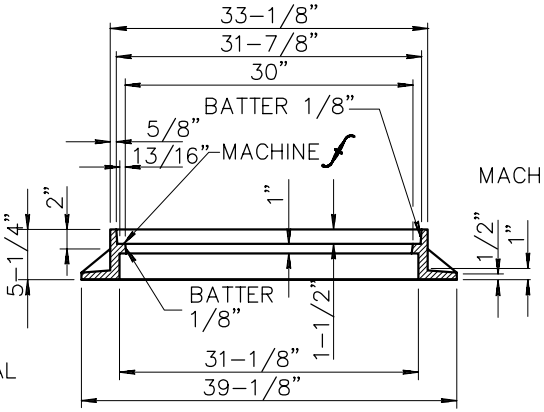

SECTION OF FRAME

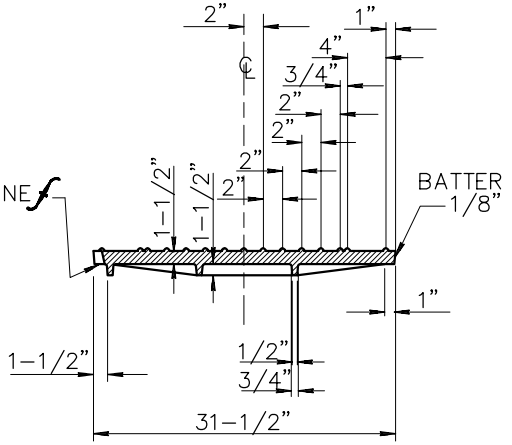

SECTION 'B-B' OF COVER

NOTE:

LETTERING ON MANHOLE COVER TO CONTAIN NAME OF AGENCY AND UTILITY FOR WHICH MANHOLE IS NEEDED, (I.E. "PHOENIX SANITARY SEWER"), OR AS DIRECTED. THE TOTAL WIDTH OF INDIVIDUAL LETTERS TO BE SUCH THAT LETTERS AND WORDS ARE EQUALLY SPACED AND BALANCED TO FORM A COMPLETE CIRCLE WITH SPACERS BEFORE AND AFTER THE WORD IDENTIFYING THE AGENCY INVOLVED. LETTERS TO BE 2" IN HEIGHT AND RAISED 1/8" ABOVE LEVEL OF COVER. TYPE OF LETTERS TO BE SUBMITTED FOR APPROVAL. WEIGHT OF CASTINGS SHALL BE NO MORE THAN 2% LESS THAN THE APPROXIMATE WEIGHT SPECIFIED. CASTINGS SHALL CONFORM TO SECTION 787.

DETAIL NO.			REVISED	DETAIL NO.
424	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	24" AND 30" MANHOLE FRAME AND COVER		424

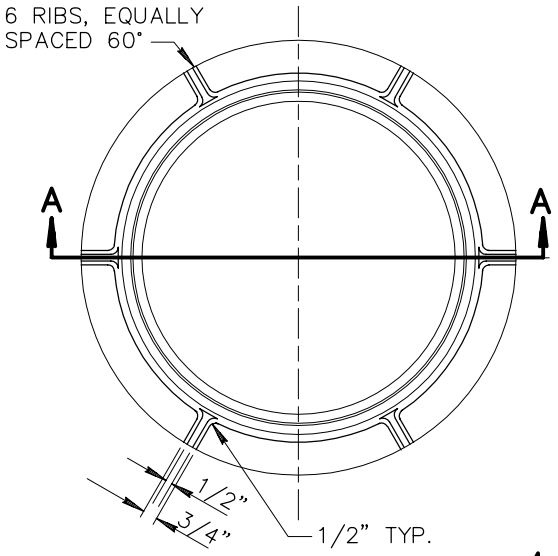

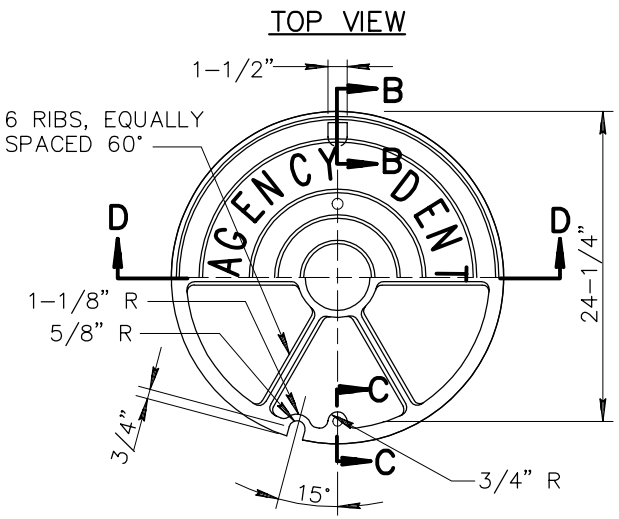

BOTTOM VIEW

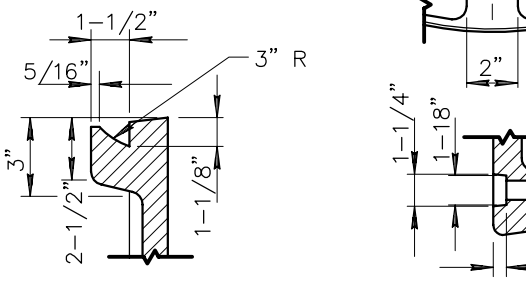

SECTION 'B-B'

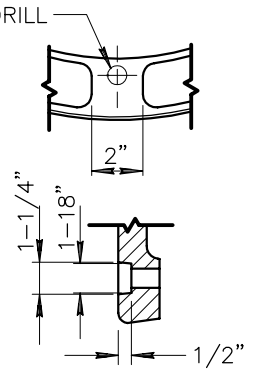

SECTION 'C-C'



SECTION VIEW OF FRAME AND COVER WITH CAM LOCKING DEVICE



SECTION E-E

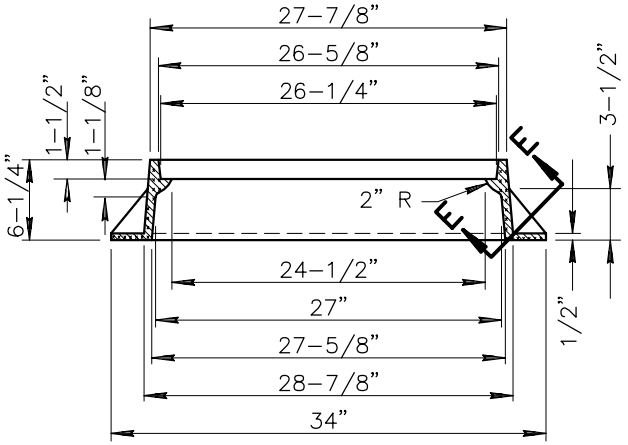

SECTION 'A-A'

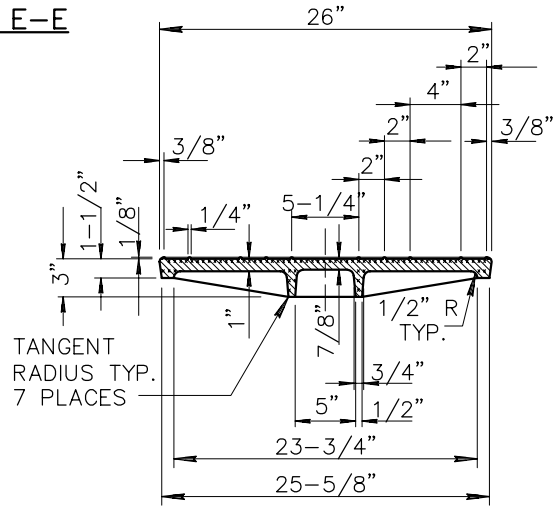

SECTION 'D-D'

NOTES:

1. MATERIAL SHALL CONFORM TO A.S.T.M. STANDARDS
   B 179-65 ALLOY SN122A
   B 179-65 ALLOY CN42A
   B 108-65 ALLOY SC103A
   (ALL 3 ACCEPTABLE)
2. LETTERING ON MANHOLE COVER TO CONTAIN NAME OF AGENCY AND UTILITY FOR WHICH MANHOLE IS NEEDED. (I.E. "PHOENIX SANITARY SEWER"), OR AS DIRECTED. THE TOTAL WIDTH OF INDIVIDUAL LETTERS TO BE SUCH THAT LETTERS AND WORDS ARE EQUALLY SPACED AND BALANCED TO FORM A COMPLETE CIRCLE WITH SPACERS BEFORE AND AFTER THE WORD IDENTIFYING THE AGENCY INVOLVED. LETTERS TO BE 2" RAISED 1/8" ABOVE LEVEL OF COVER. TYPE OF LETTERS TO BE SUBMITTED FOR APPROVAL.
3. WEIGHT OF CASTINGS SHALL BE NO MORE THAN 2% LESS THAN THE APPROXIMATE WEIGHT SPECIFIED.
4. CASTINGS SHALL CONFORM TO SECT. 787.
5. SHALL CONFORM TO SECT. 625.3.1 – (FRAME AND COVER).

DETAIL NO.			REVISED	DETAIL NO.
425	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	24" ALUMINUM MANHOLE FRAME AND COVER		425

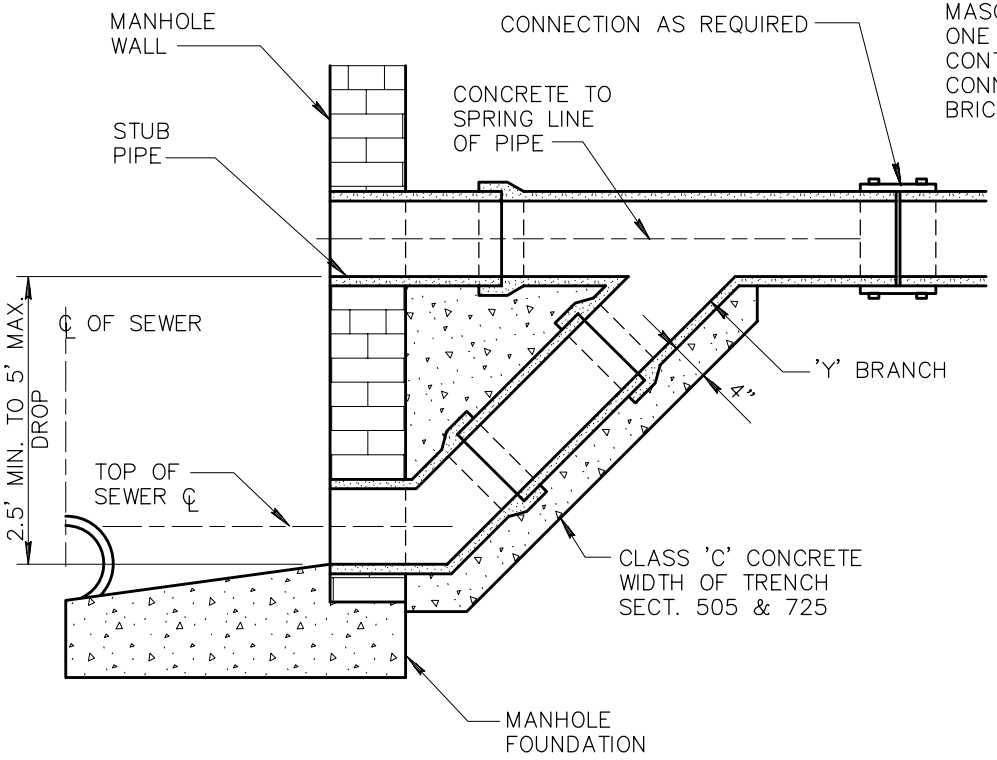

TYPE A
2.5' TO 5' DROP

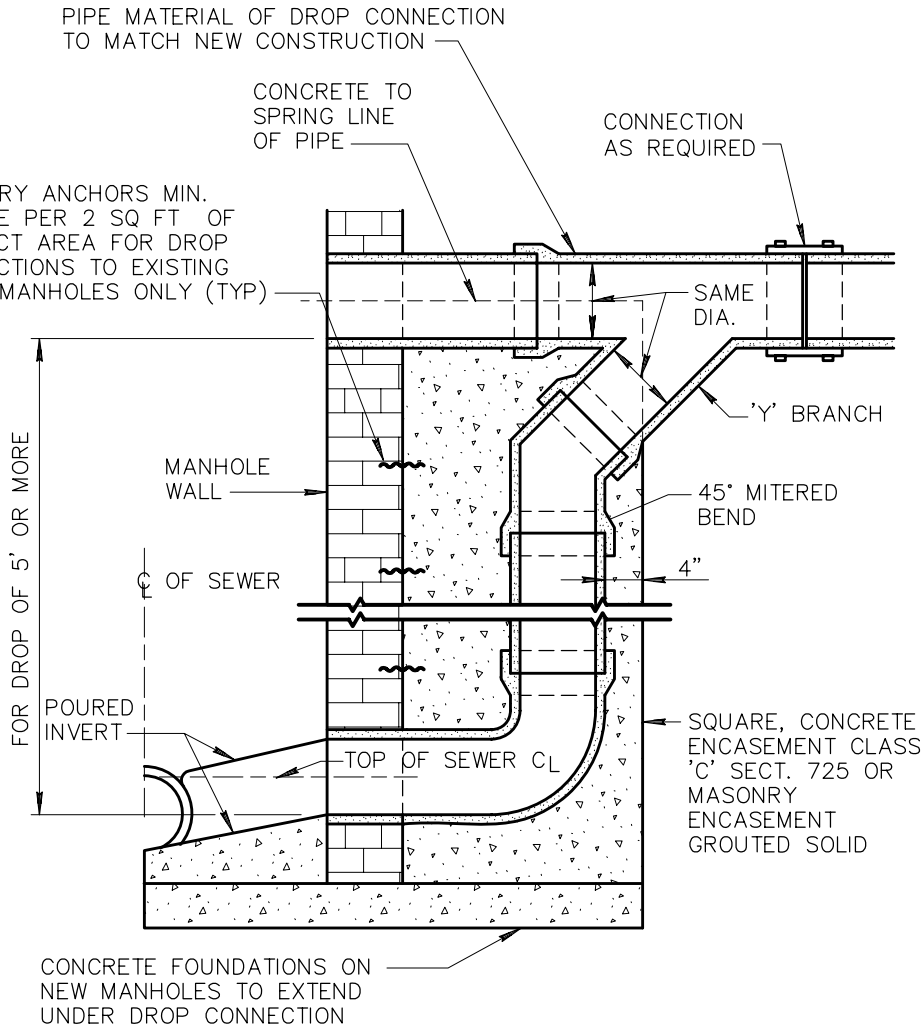

TYPE B
5' OR MORE

DETAIL NO.			REVISED	DETAIL NO.
426	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	DROP SEWER CONNECTIONS	01-01-2007	426

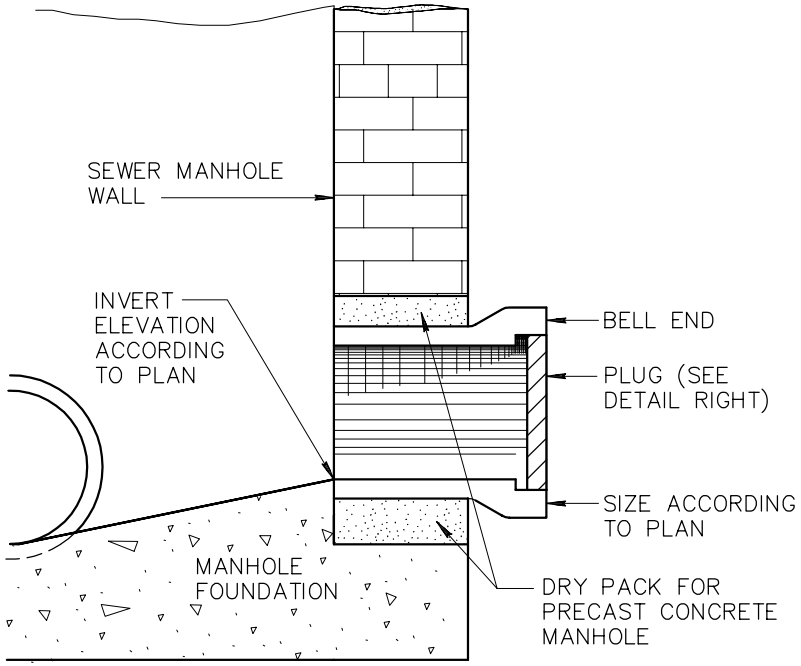

TYPICAL STUB OUT

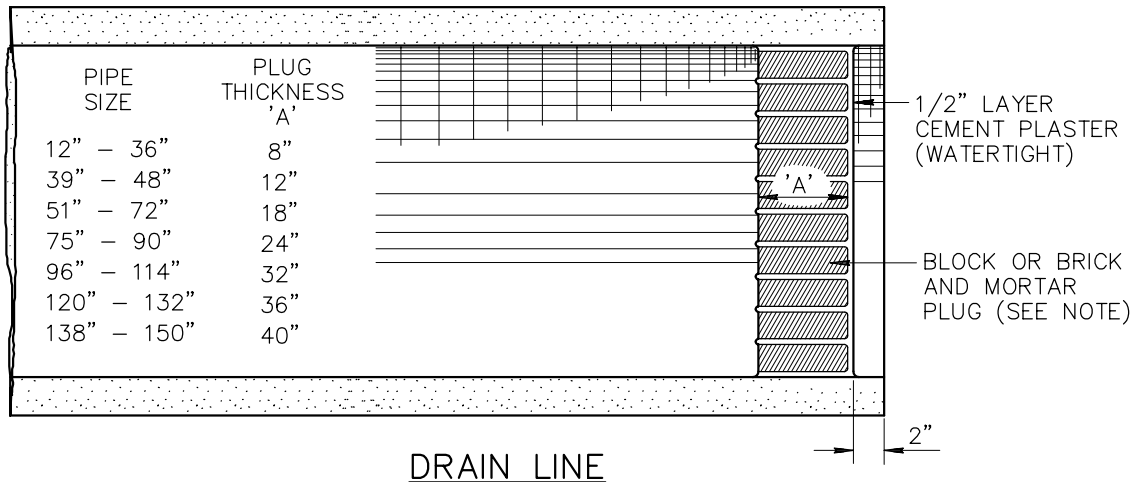

DRAIN LINE

NOTES:

1. NOTE: COMPACT SOIL AT END OF PIPE TO 95% OF MAXIMUM DENSITY.
2. IF DEPTH OF COVER IS LESS THAN 5' OR GREATER THAN 10' INCREASE PLUG THICKNESS A MIN. OF 4".

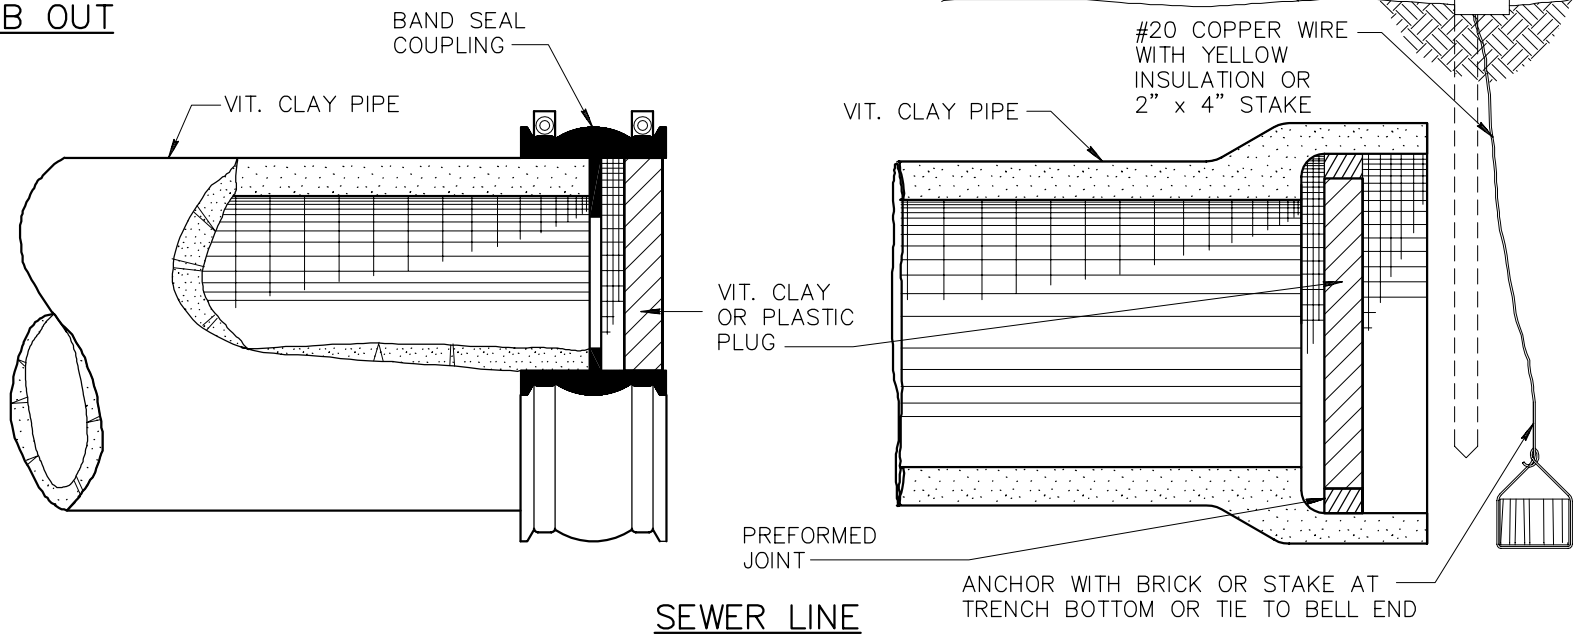

SEWER LINE

DETAIL NO.			REVISED	DETAIL NO.
427	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	STUB OUT AND PLUGS		427

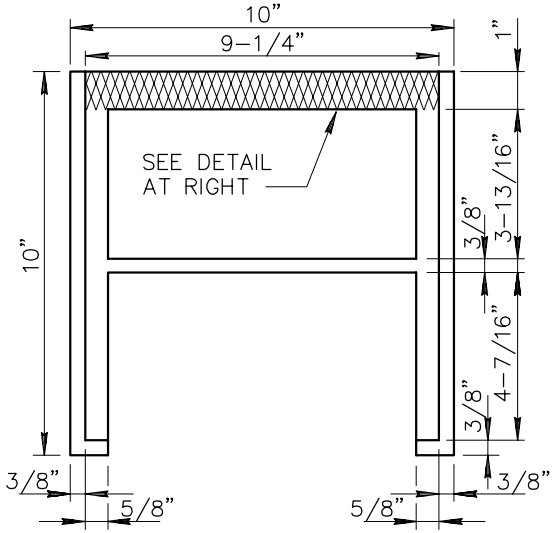

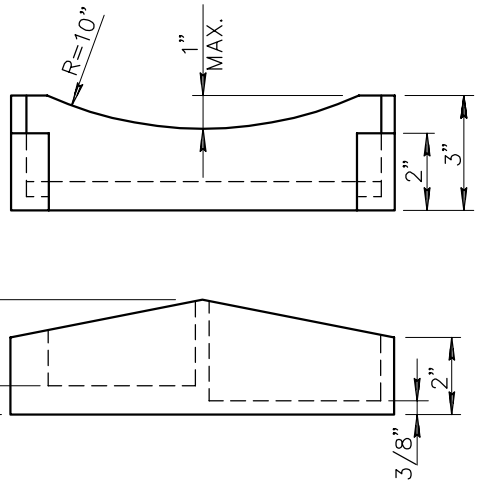

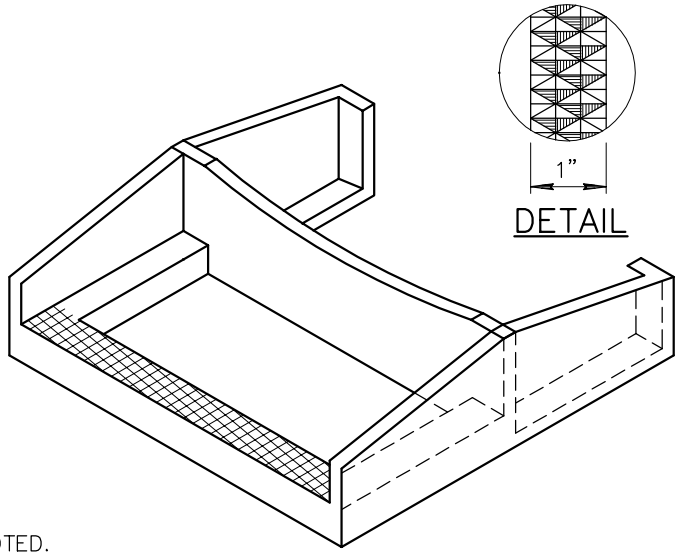

NOTES

1. ALL DIMENSIONS ARE MINIMUM EXCEPT WHERE NOTED.
2. CASTING AS PER SECT. 787.

CAST IRON MANHOLE STEP

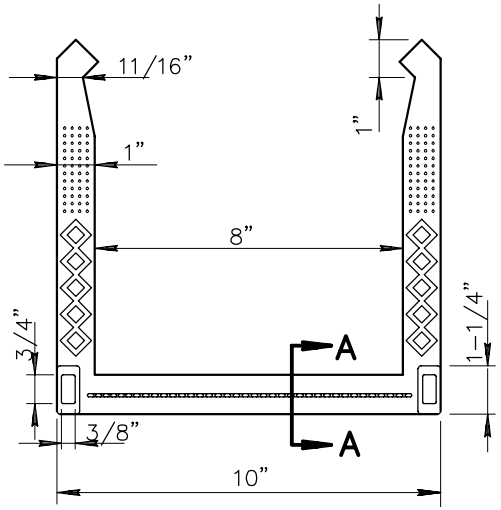

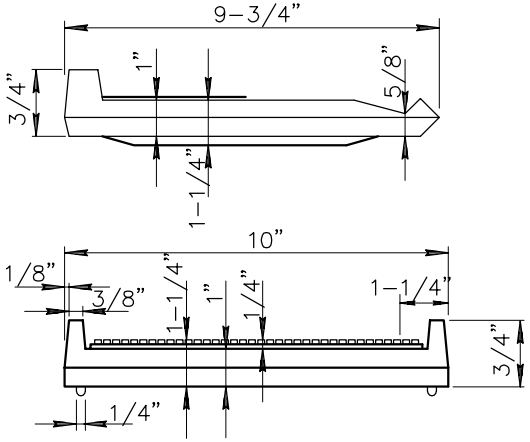



SECTION A-A

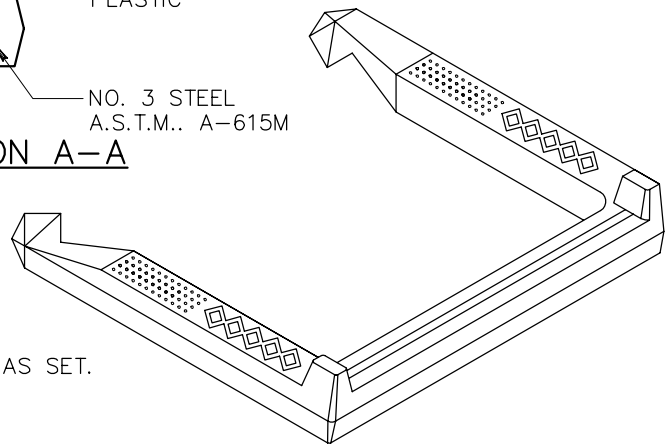

NOTES

1. STEPS SHALL BE PLACED INTO WET CONCRETE WALL DURING MANUFACTURE OR MORTARED INTO HOLES AFTER CONCRETE HAS SET.
2. POLYPROPYLENE MUST MEET REQUIREMENTS OF A.S.T.M. 2146, TYPE II, GRADE 16906.

POLYPROPYLENE MANHOLE STEP

DETAIL NO.			REVISED	DETAIL NO.
428	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	MANHOLE STEPS		428

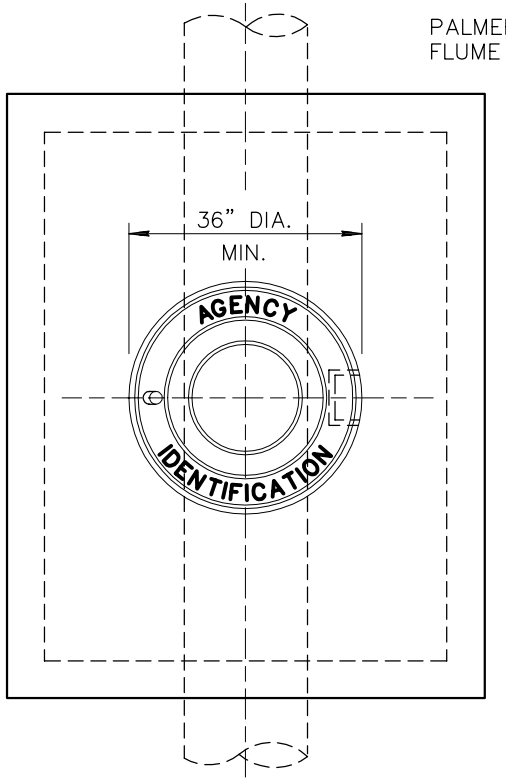

MANHOLE & COVER SLAB

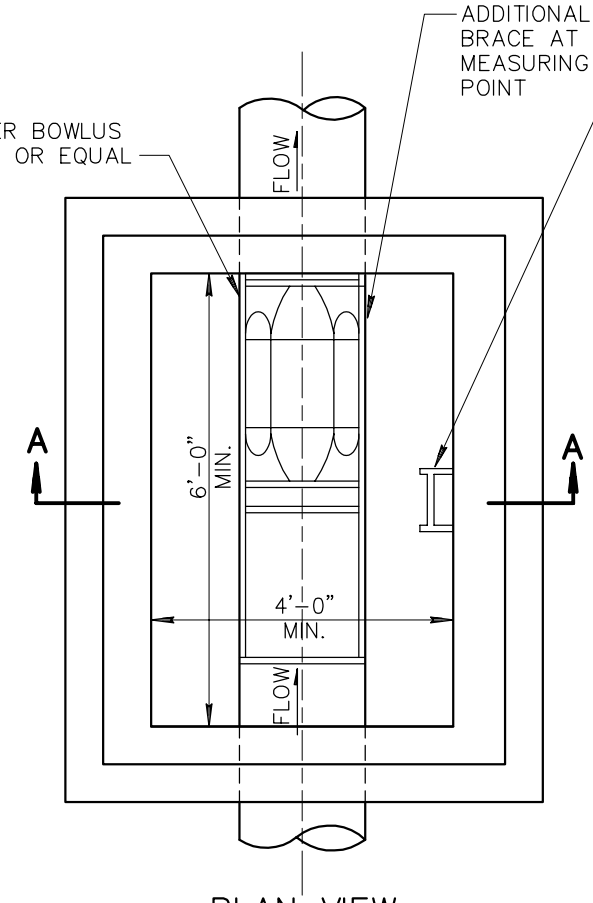

PLAN VIEW

NOTE: WITH COVER REMOVED.

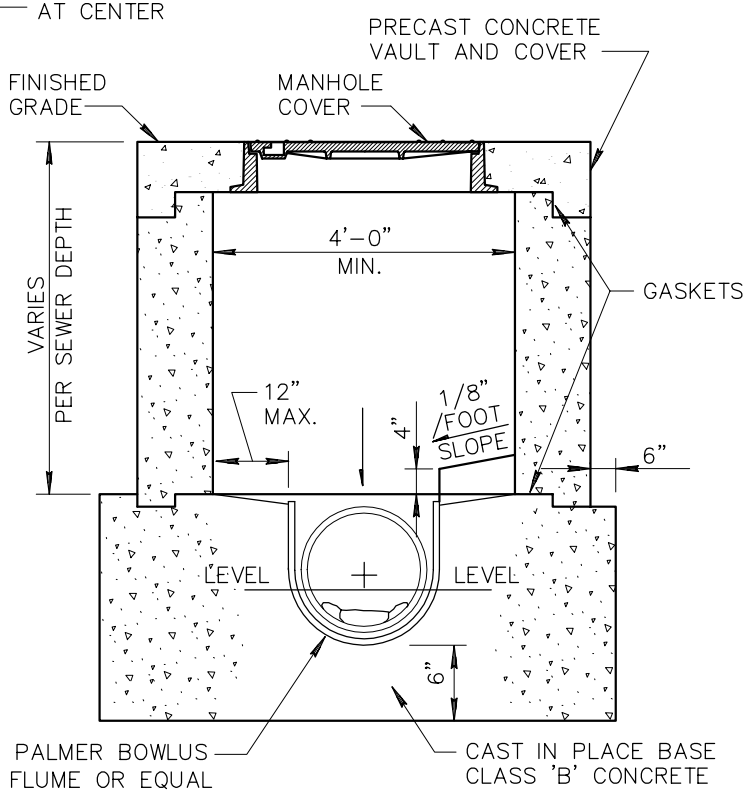

SECTION A-A

NOTE: LADDER NOT SHOWN IN SECTION VIEW.
SECTION SHOWN WITH COVER IN PLACE.

NOTES:

1. THIS CONTROL VAULT WITH MANHOLE AND COVER SHALL BE USED ON 6" AND 8" DIAMETER SEWER WITH FLOWS IN THE RANGE OF 40 TO 340 GPM.
2. VAULT TO BE CONSTRUCTED ON STRAIGHT RUN OF BUILDING SEWER. ACCESSIBLE AND SAFELY LOCATED ON THE OWNERS PROPERTY ADJACENT TO A PUBLIC RIGHT-OF-WAY.
3. THE PALMER BOWLUS FLUME SHALL BE INSTALLED PER THE MANUFACTURERS RECOMMENDATIONS.
4. THE PRE-CAST CONCRETE VAULT SHALL BE RECTANGULAR WITH MINIMUM INSIDE DIMENSIONS OF 4" WIDE AND 6" LONG AND AT A DEPTH OF THE DESIGN OF THE BUILDING SEWER.
5. A SHOP DRAWING SHALL BE SUBMITTED TO THE CONTRACTING AGENCY FOR APPROVAL BEFORE INSTALLATION OF THE VAULT AND THE PALMER BOWLUS FLUME WILL BE ALLOWED.

DETAIL NO.			REVISED	DETAIL NO.
429	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**INDUSTRIAL WASTE CONTROL VAULT WITH MANHOLE**		429

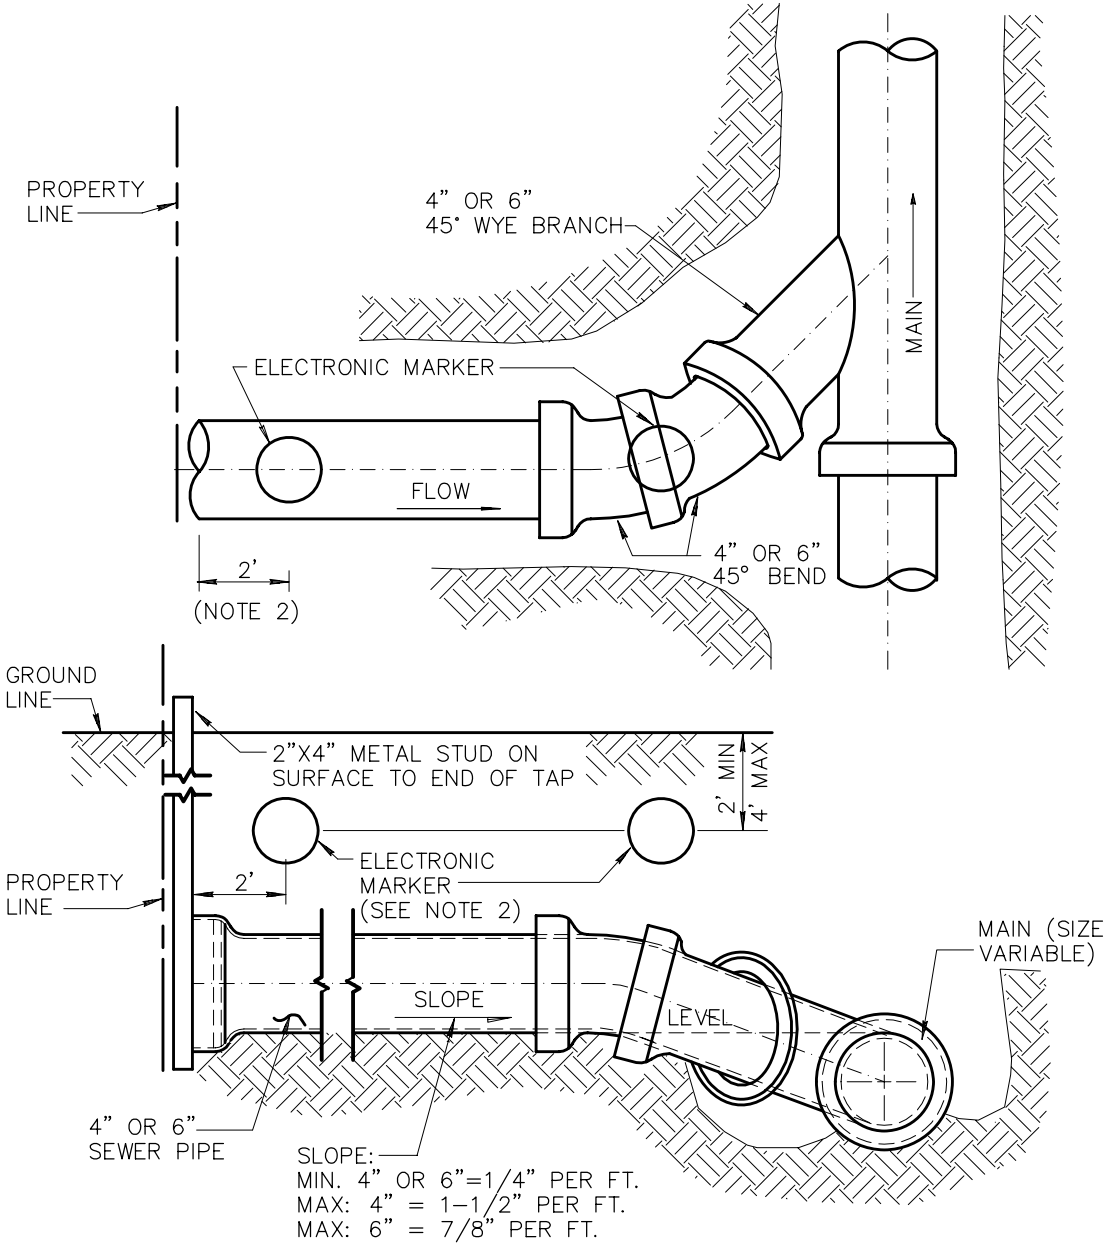

ELECTRONIC MARKER PLACEMENT

NOTES:

1. ELECTRONIC MARKER SHALL BE A 3M MODEL 1424-XR/iD [4" DIAMETER SELF LEVELING MARKER BALL GREEN IN COLOR] OR APPROVED EQUAL OR AS REQUIRED BY THE LOCAL AGENCY.
2. MARKER SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S DIRECTIONS, 2' BACK FROM THE END OF THE SEWER SERVICE STUB AND CINCH TIED TO PIPE OR ABOVE PIPE AS REQUIRED BY LOCAL AGENCY. AN ADDITIONAL MARKER SHALL BE INSTALLED AT EACH SERVICE STUB BEND.
3. ELECTRONIC MARKER SHALL BE RESTORED BY CONTRACTOR IF DISTURBED WHEN PRIVATE SERVICE LINE CONNECTION IS INSTALLED.
4. MARKER SHALL BE USED IN ADDITION TO A 2"x4" METAL STUD.
5. CONSTRUCTION DETAIL APPLIES WHERE CONTRACTOR BUILDS HOUSE CONNECTION. TAP EXTENDS TO PROPERTY LINE IN ALLEYS OR STREETS OR TO EASEMENT LINE.
6. SIZE OF TAP SHALL BE DESIGNATED ON PLANS.
7. CONSTRUCT TAP AT MINIMUM SLOPE IF COVER WILL BE LESS THAN 5' AT PROPERTY LINE.
8. ALL FITTINGS SHALL BE INSTALLED IN ACCORDANCE WITH ASTM D-2321. THE CONTRACTOR MAY VARY FROM THE DRAWING TO USE THE APPROPRIATE WYES, TEE-WYES AND BENDS TO ENSURE NO MISALIGNMENT OF THE PIPE AND FITTINGS. BLOCK OR BRACE FITTINGS JOINTS TO ENSURE ZERO DEGREES ANGULAR JOINT DEFLECTION.
9. END OF TAP TO BE SEALED AND MARKED AS NOTED.

DETAIL NO.			REVISED	DETAIL NO.
440-1	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	**TYPE 'A' – SEWER BUILDING CONNECTION ELECTRONIC BALL MARKERS (STANDARD)**	01-01-2007	440-1

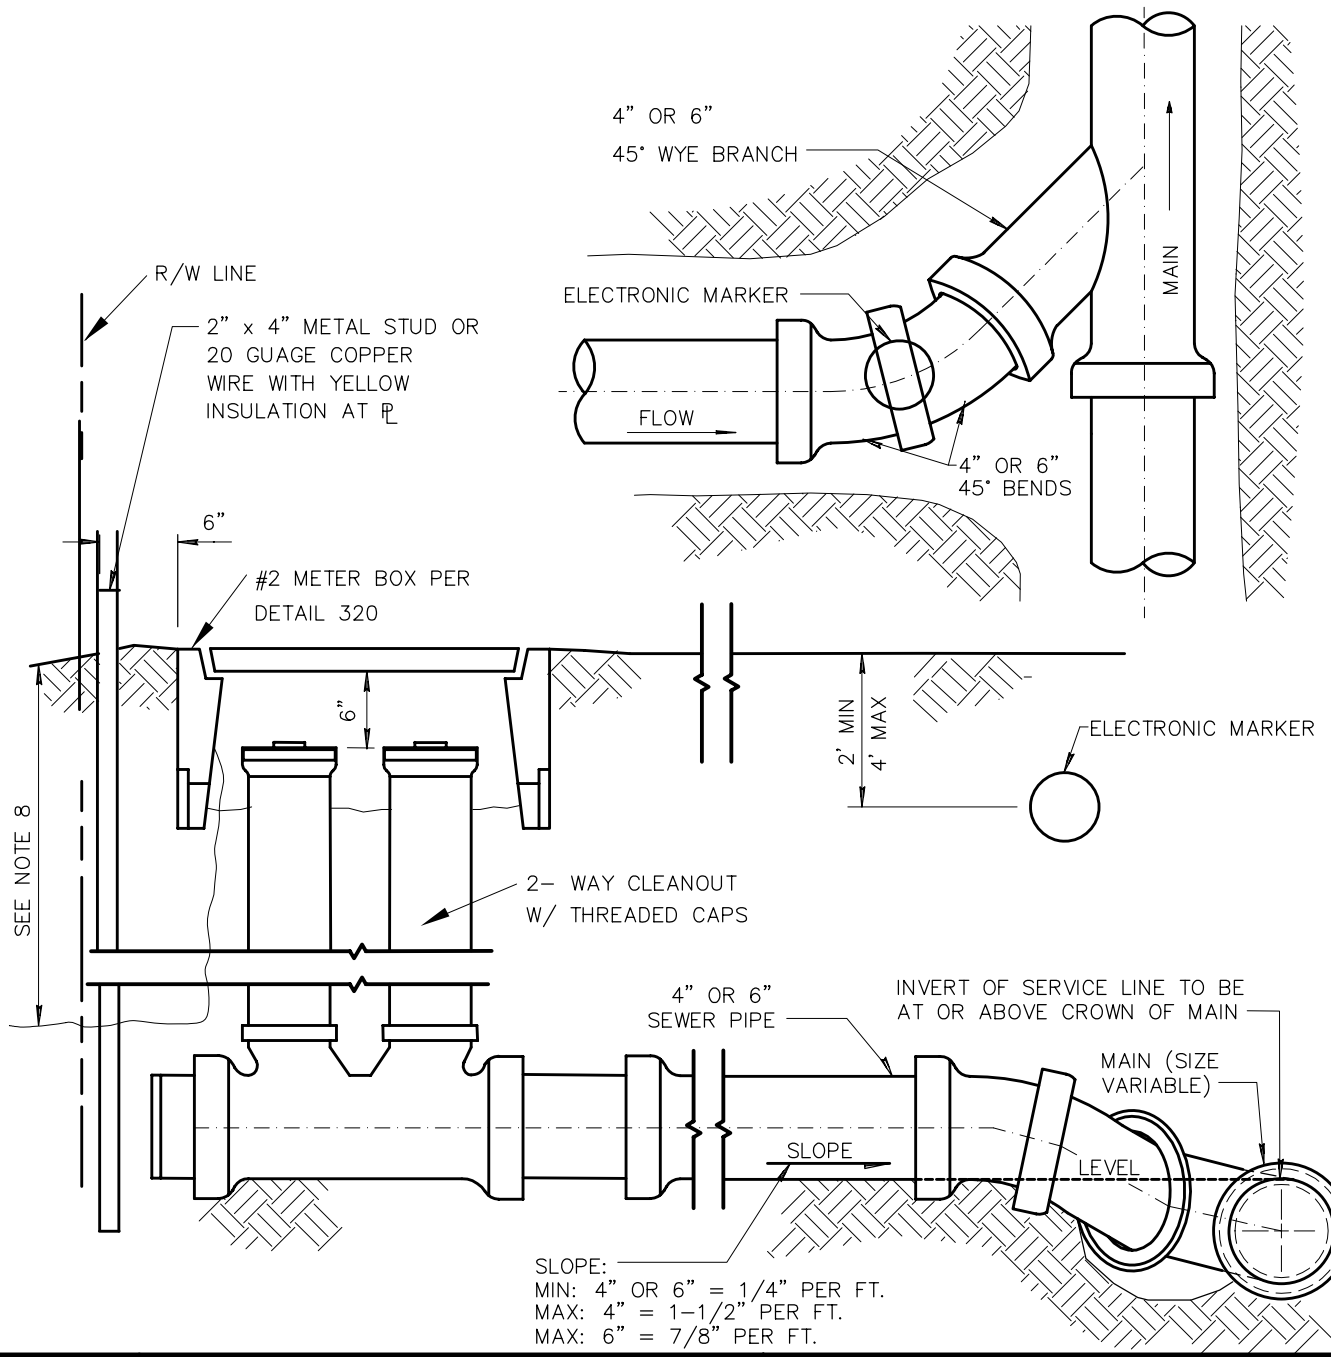

NOTES:

1. CONSTRUCTION DETAIL APPLIES WHERE CONTRACTOR BUILDS HOUSE CONNECTION. TAP EXTENDS TO PROPERTY LINE IN ALLEYS OR STREETS OR TO EASEMENT LINE.
2. SIZE OF TAP SHALL BE DESIGNATED ON PLANS.
3. CONSTRUCT TAP AT MINIMUM SLOPE IF COVER WILL BE LESS THAN 5' AT PROPERTY LINE.
4. IF DEPTH REQUIRES, MINIMUM SLOPE CAN BE REDUCED TO 1/8" PER FOOT PROVIDED STUB IS STAKED TO GRADE.
5. ALL FITTINGS SHALL BE INSTALLED IN ACCORDANCE WITH ASTM D-2321. THE CONTRACTOR MAY VARY FROM THE DRAWING TO USE THE APPROPRIATE WYES, TEE-WYES AND BENDS TO ENSURE NO MISALIGNMENT OF THE PIPE AND FITTINGS. BLOCK OR BRACE FITTING JOINTS TO ENSURE ZERO DEGREES ANGULAR JOINT DEFLECTION.
6. END OF TAP TO BE SEALED AND MARKED AS NOTED.
7. ELECTRONIC MARKER SHALL BE A 3M MODEL 1424-XR/iD [4" DIAMETER SELF LEVELING MARKER BALL GREEN IN COLOR] OR APPROVED EQUAL OR AS REQUIRED BY THE LOCAL AGENCY.
8. # 14 BARE COPPER LOCATOR WIRE ACCESSIBLE AT R/W AND AT PROPERTY OWNER CLEANOUT BOX NO GREATER THAN 4' DEEP.
9. STAMP OR WELD THE LETTER "S" ON LID OF METER BOX.

DETAIL NO.				REVISED	DETAIL NO.
440-2	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	**TYPE 'B' – SEWER BUILDING CONNECTION** **TWO-WAY CLEANOUT AND METER BOX AT R/W** (WHEN SPECIFIED BY LOCAL AGENCY)		01-01-2007	440-2

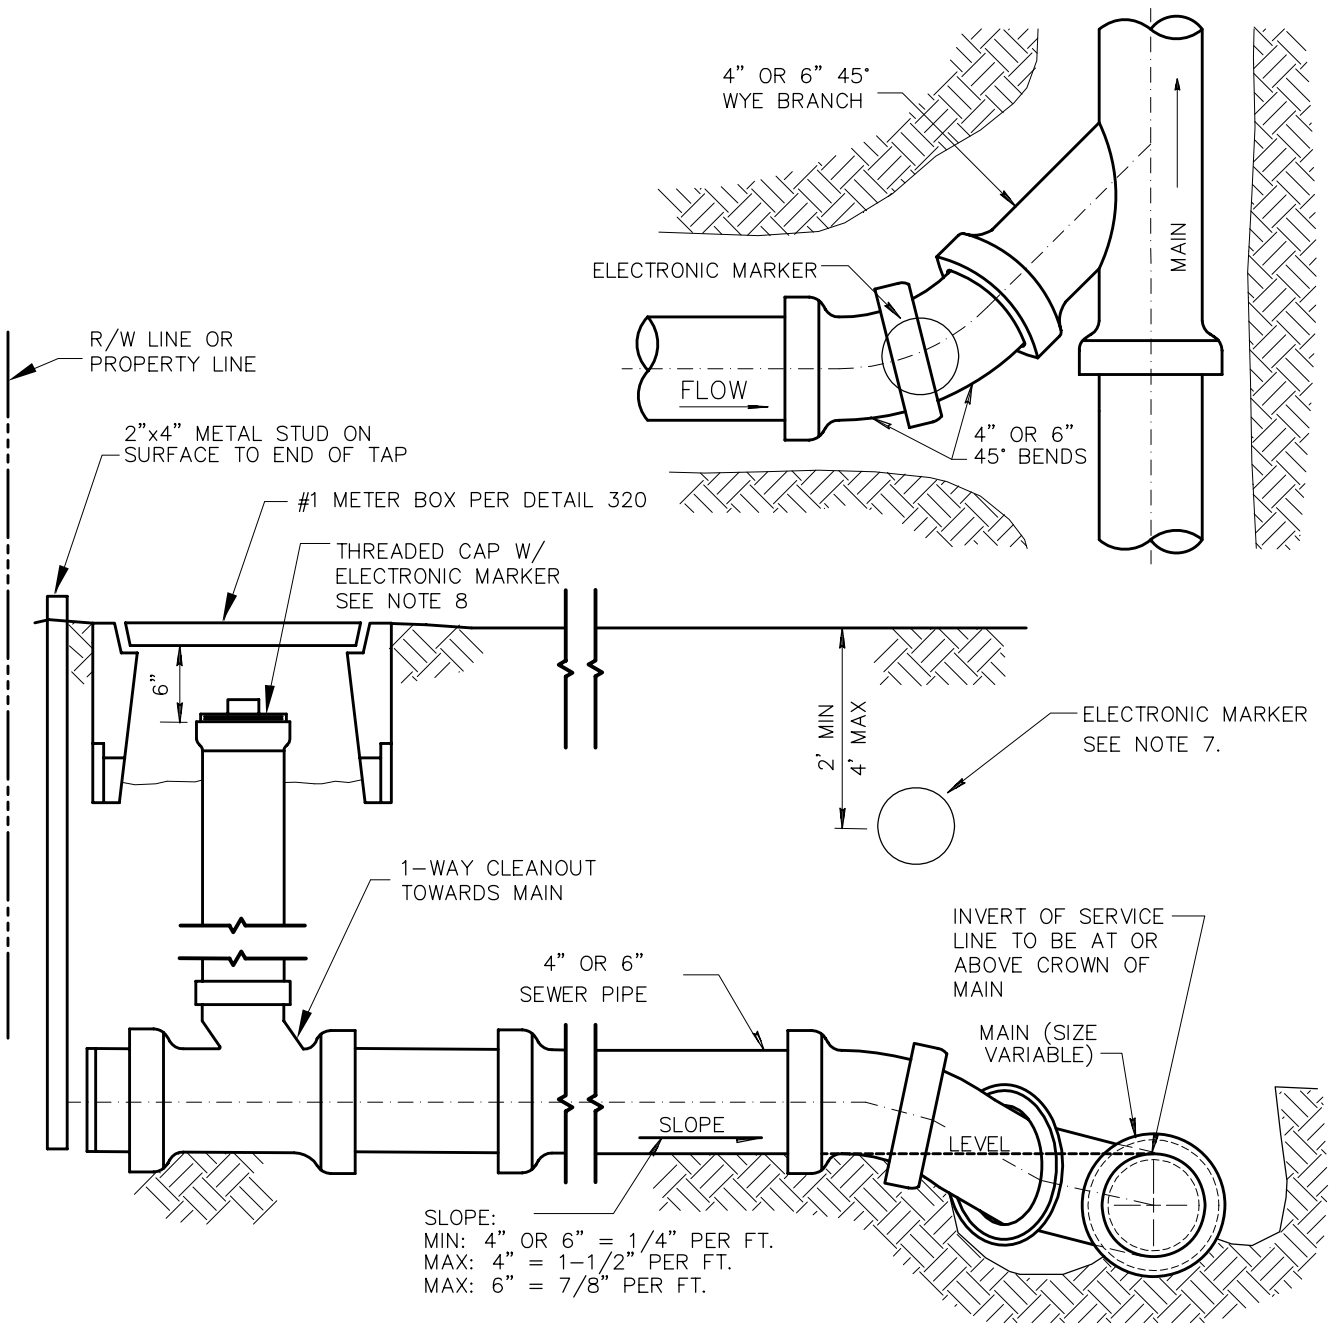

NOTES:

1. CONSTRUCTION DETAIL APPLIES WHERE CONTRACTOR BUILDS HOUSE CONNECTION. TAP EXTENDS TO PROPERTY LINE IN ALLEYS OR STREETS OR TO EASEMENT LINE.
2. SIZE OF TAP SHALL BE DESIGNATED ON PLANS.
3. CONSTRUCT TAP AT MIN. SLOPE IF COVER WILL BE LESS THAN 5' AT PROPERTY LINE.
4. IF DEPTH REQUIRES, MINIMUM SLOPE CAN BE REDUCED TO 1/8" PER FOOT PROVIDED STUB IS STAKED TO GRADE.
5. ALL FITTINGS SHALL BE INSTALLED IN ACCORDANCE WITH ASTM D-2321. THE CONTRACTOR MAY VARY FROM THE DRAWING TO USE THE APPROPRIATE WYES, TEE-WYES AND BENDS TO ENSURE NO MISALIGNMENT OF THE PIPE AND FITTINGS. BLOCK OR BRACE FITTING JOINTS TO ENSURE ZERO DEGREES ANGULAR JOINT DEFLECTION.
6. END OF TAP TO BE SEALED AND MARKED.
7. ELECTRONIC MARKER SHALL BE A 3M MODEL 1424-XR/iD [4" DIAMETER SELF LEVELING MARKER BALL GREEN IN COLOR] OR APPROVED EQUAL OR AS REQUIRED BY THE LOCAL AGENCY.
8. INSTALL RAISED 4" THREADED PLUG IN CLEANOUT INCORPORATING 3M MODEL 1414 ELECTRONIC DISC MARKER. GREEN IN COLOR. LOCATOR PLUG TO BE GPK PRODUCTS MODEL #228-0004 DM OR APPROVED EQUAL.
9. STAMP OR WELD THE LETTER "S" ON LID OF METER BOX.

DETAIL NO.				REVISED	DETAIL NO.
440-3	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	**TYPE 'C' – SEWER BUILDING CONNECTION** **ONE-WAY CLEANOUT AND METER BOX** (WHEN SPECIFIED BY LOCAL AGENCY)		01-01-2007	440-3

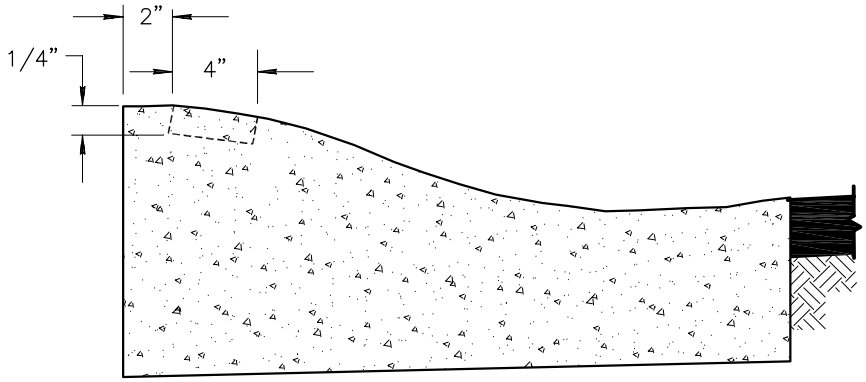

SECTION A–A

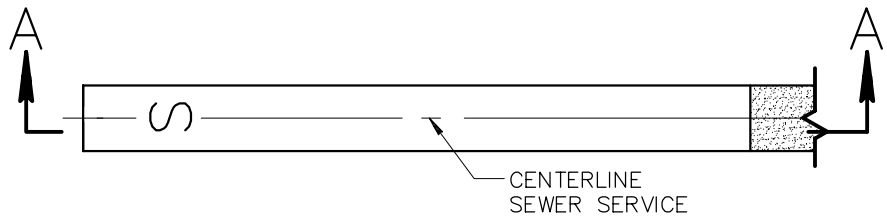

CURB STAMP ROLLED CURB

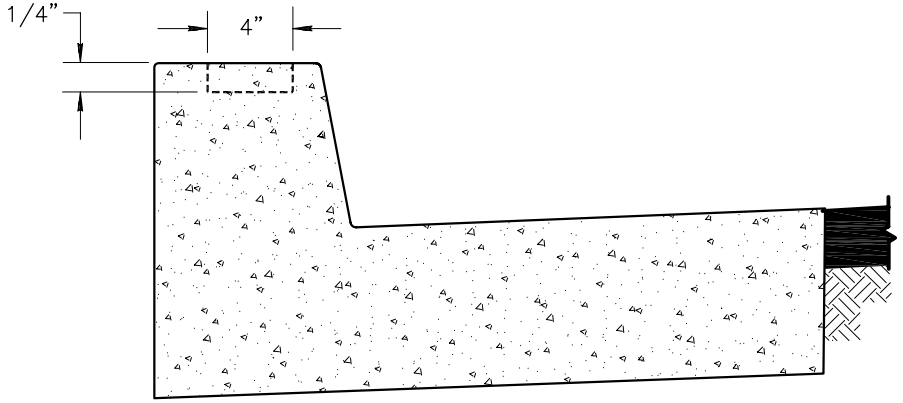

SECTION A–A

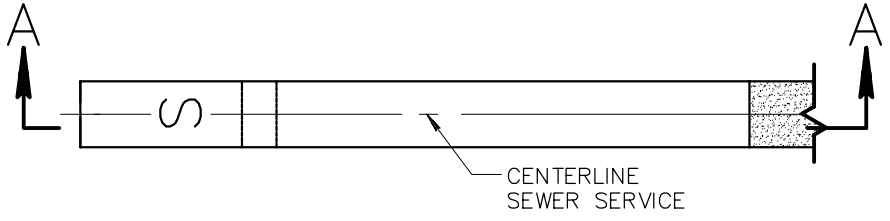

CURB STAMP VERTICAL CURB

NOTES:

1. STAMP TOP OF CURB WITH 4" TALL BY 1/4" DEEP "S" TO DESIGNATE SEWER SERVICE LINE CROSSING.

DETAIL NO.			REVISED	DETAIL NO.
440–4	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	SEWER SERVICE CURB CROSSING STAMP DETAIL	01–01–2006	440–4

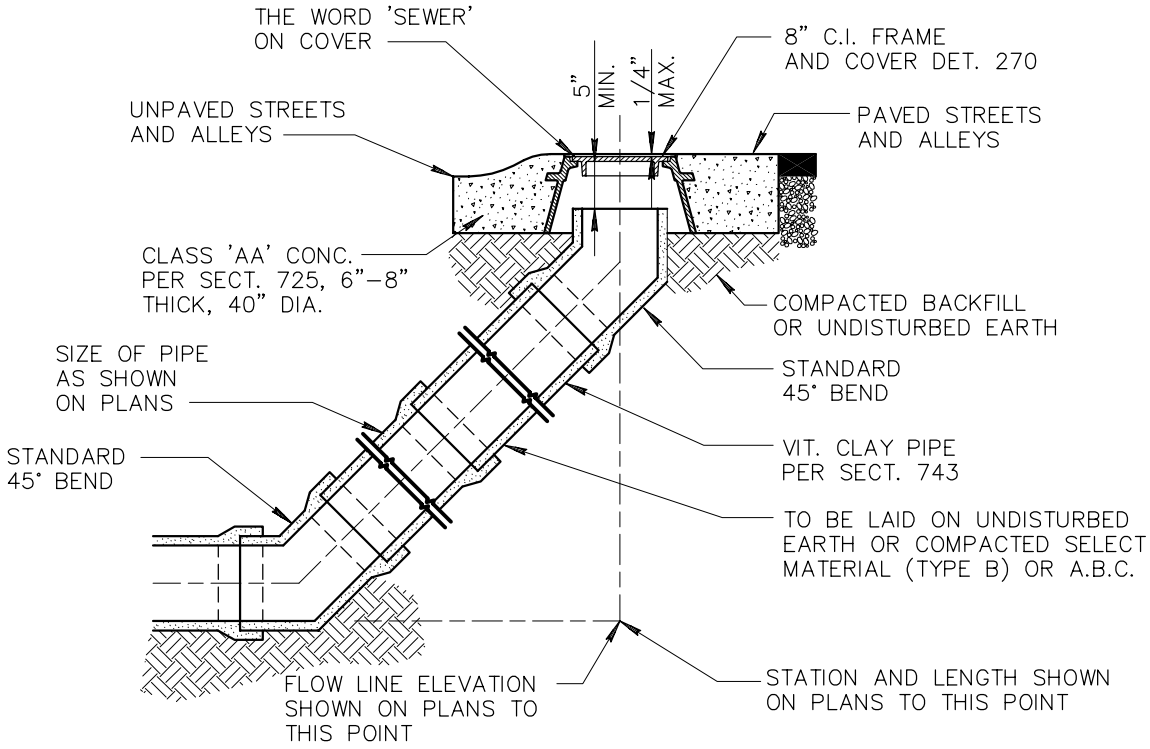

CLEANOUT INSTALLATION

NOTE:

END OF SEWER TAP TO BE SEALED AND MARKED IN ACCORDANCE WITH DET. 440

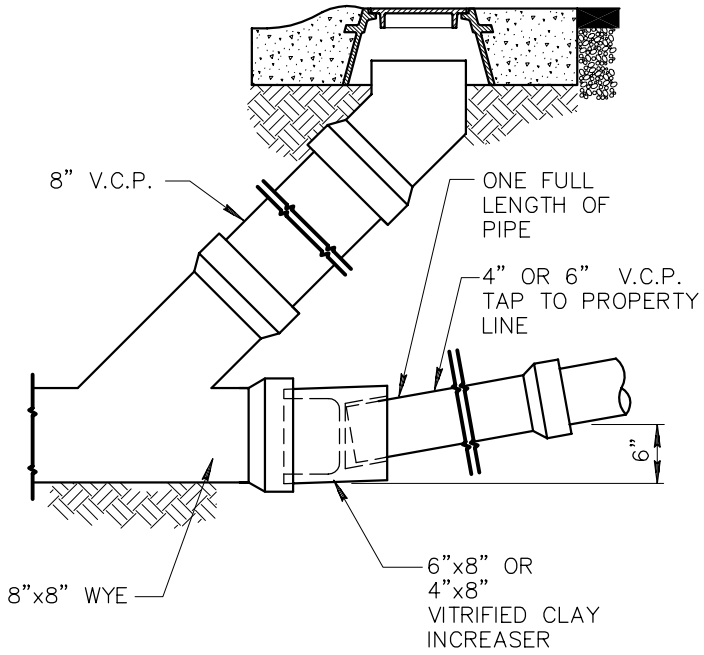

SEWER TAP AT CLEANOUT

DETAIL NO.			REVISED	DETAIL NO.
441	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	SEWER CLEANOUT	01-01-2001	441

This Page Is Reserved for Future Use.

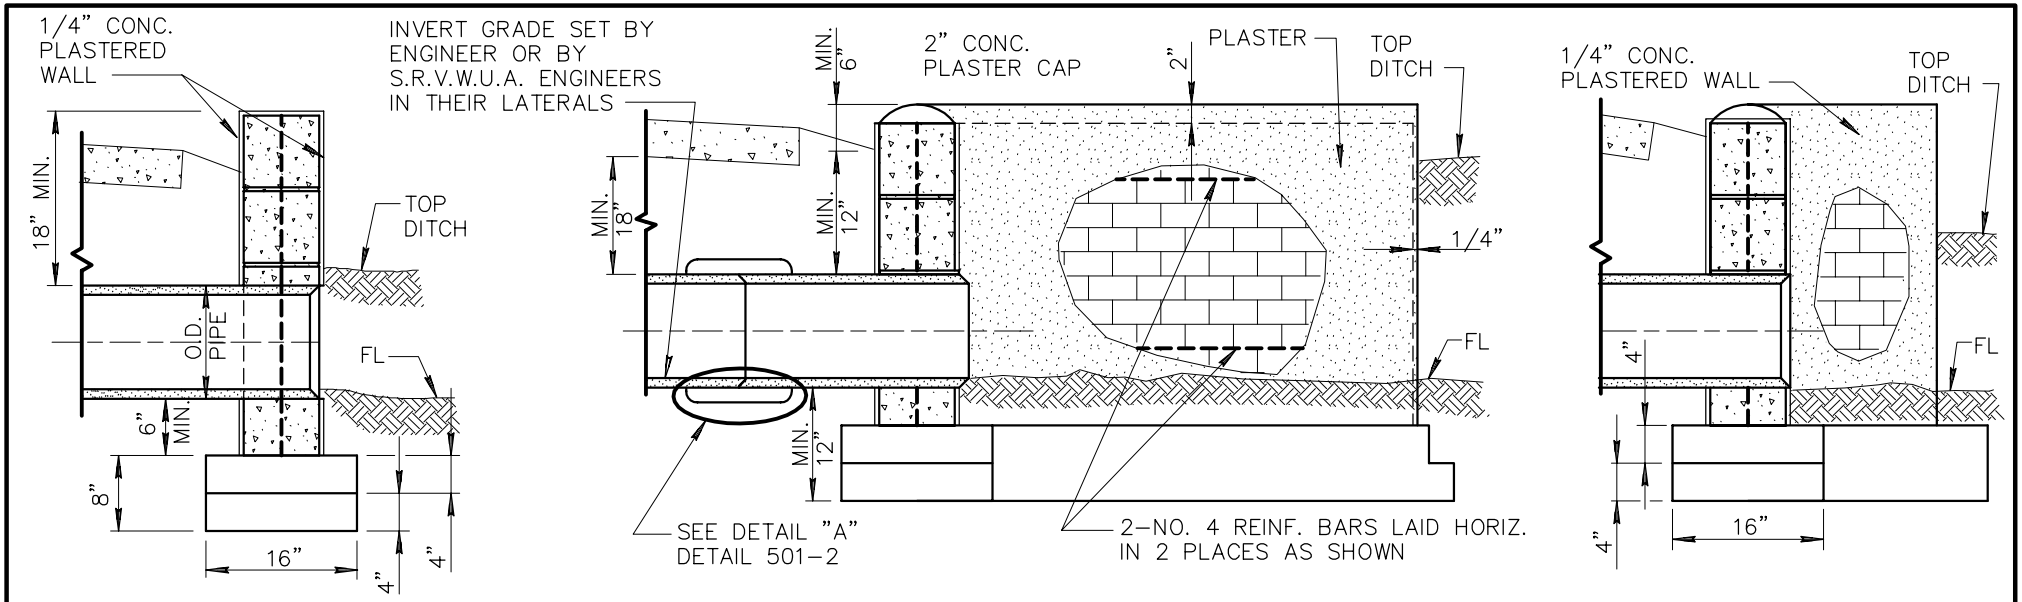

SECTION B-B

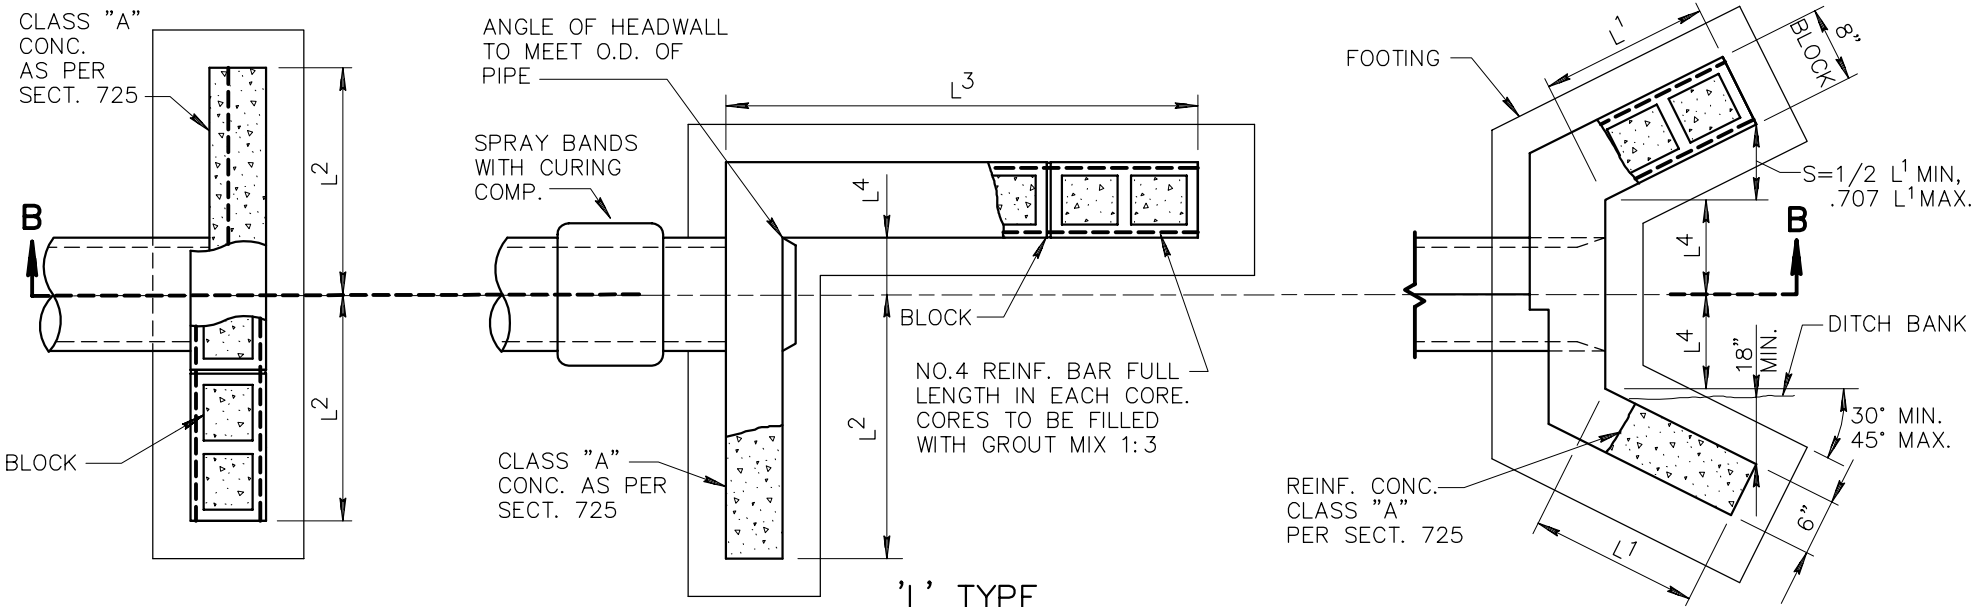

STRAIGHT TYPE

'L' TYPE

PLAN

'U' TYPE

DETAIL NO.			REVISED	DETAIL NO.
501-1	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**HEADWALL**		501-1

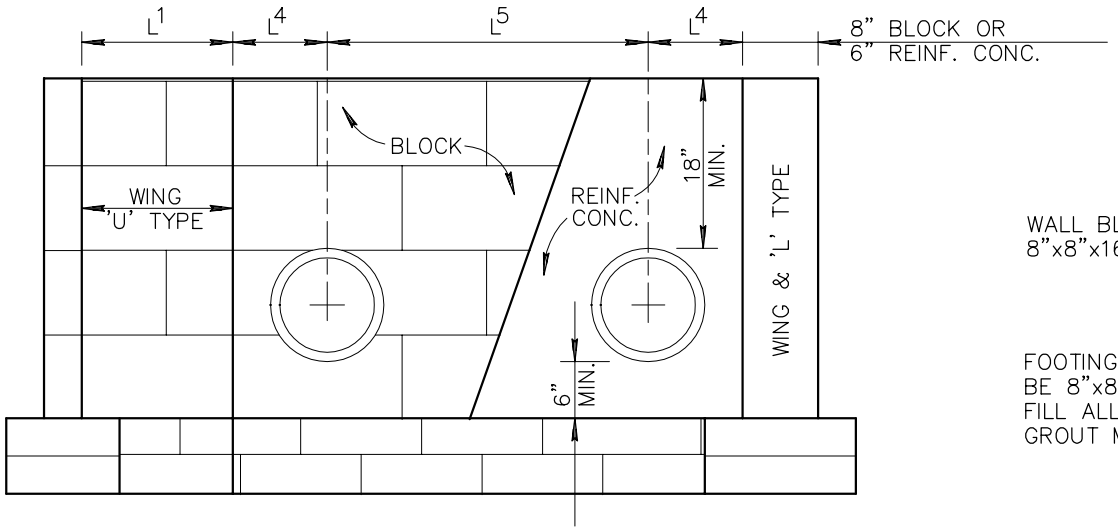

DOUBLE PIPE HEADWALL

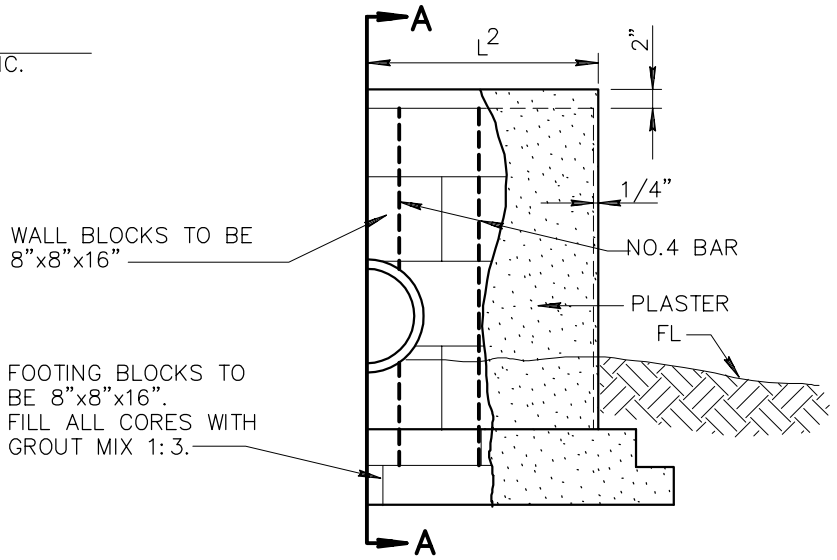

ELEVATION

CONCRETE MASONRY UNITS (BLOCK) HEADWALLS JOINED WITH CEMENT MORTAR AND CONCRETE PLASTERED BOTH SIDES OF WALL FULL HEIGHT AND SHALL BE CURED PER SECT. 726.

NOTES:

1. ALL CONCRETE SHALL BE CLASS 'A' PER SECT. 505 & 725.
2. CONCRETE MASONRY UNITS (BLOCK) PER SECT. 510, 775 & 776.
3. CONCRETE REINF. SHALL BE NO.4 BAR 12" O.C. BOTH WAYS.

HEADWALL DIMENSIONS					
*NOMINAL PIPE SIZE	L^1	L^2	L^3	L^4	L^5
12"	1'–4"	2'–0"	3'–8"	0'–10"	2'–10"
15"	2'–0"	2'–8"	4'–0"	1'–0"	3'–0"
18"	2'–0"	3'–8"	4'–8"	1'–2"	3'–4"
21"	2'–8"	4'–0"	5'–4"	1'–3"	3'–8"
24"	2'–8"	4'–0"	5'–4"	1'–6"	3'–11"
30"	2'–8"	5'–4"	6'–8"	1'–10"	4'–7"
36"	3'–4"	6'–8"	8'–0"	1'–10"	5'–2"
42"	4'–0"	8'–0"	9–4"	2'–2"	5'–9"

* NOMINAL PIPE SIZE GIVEN FOR REINFORCED CONC. PIPE.

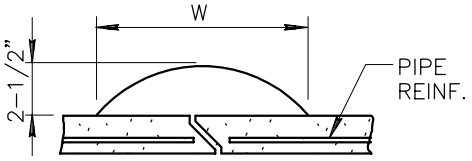

PIPE SIZE	W
12" – 21" INCL.	11"
24" – 42" INCL.	13"

DETAIL "A"

DETAIL NO.			REVISED	DETAIL NO.
501-2	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	HEADWALL		501-2

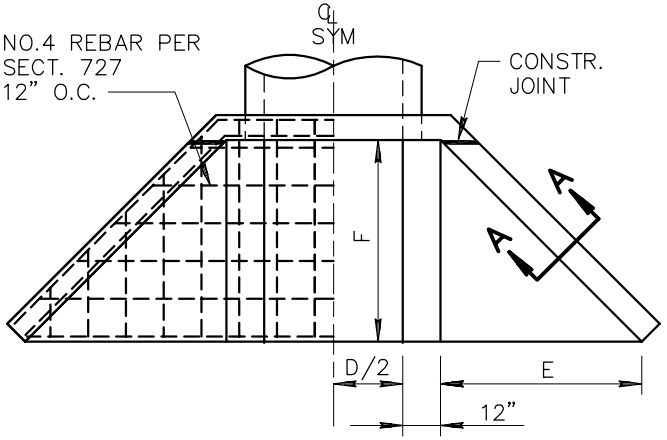

INLET HEADWALL

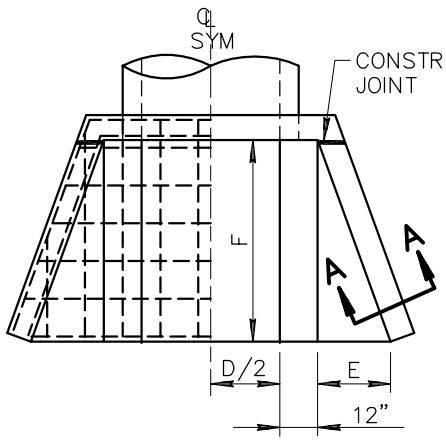

OUTLET HEADWALL

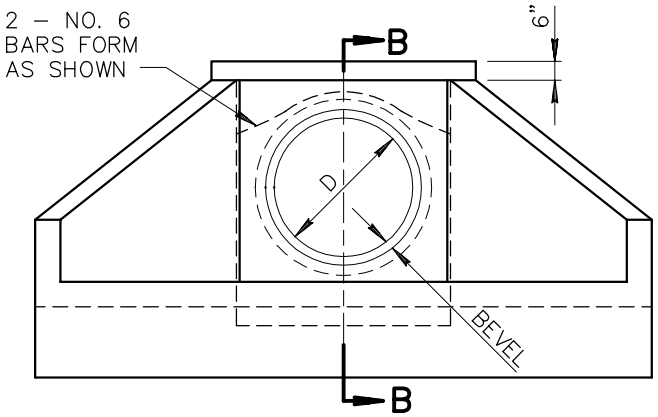

INLET HEADWALL FACE ELEVATION
OUTLET SIMILAR

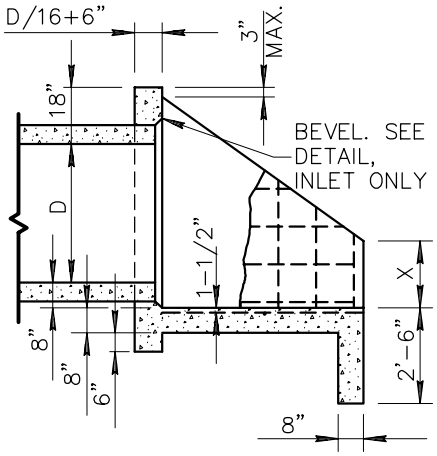

SECTION B–B

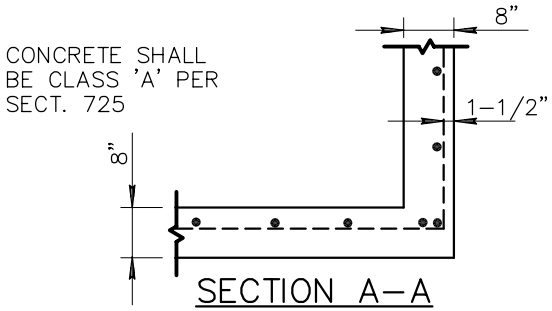

SECTION A–A

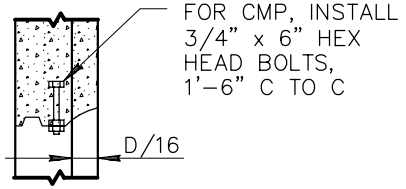

CMP BEVEL DETAIL

1:1 1/2 EMBANKMENT SLOPE				
D	TYPE *	DIMENSIONS		
		F	E	X
42"	1 (IN)	5'–2"	5'–2"	1'–9"
	2 (OUT)	5'–2"	1'–11"	1'–9"
48"	3 (IN)	5'–8"	5'–8"	1'–11"
	4 (OUT)	5'–8"	2'–1"	1'–11"
54"	5 (IN)	6'–2"	6'–2"	2'–1"
	6 (OUT)	6'–2"	2'–3"	2'–1"
60"	7 (IN)	6'–8"	6'–8"	2'–3"
	8 (OUT)	6'–8"	2'–5"	2'–3"
66"	9 (IN)	7'–2"	7'–2"	2'–5"
	10 (OUT)	7'–2"	2'–7"	2'–5"
72"	11 (IN)	7'–8"	7'–8"	2'–7"
	12 (OUT)	7'–8"	2'–9"	2'–7"
78"	13 (IN)	8'–2"	8'–2"	2'–9"
	14 (OUT)	8'–2"	3'–0"	2'–9"
84"	15 (IN)	8'–8"	8'–8"	2'–11"
	16 (OUT)	8'–8"	3'–2"	2'–11"

1:4 EMBANKMENT SLOPE				
D	TYPE *	DIMENSIONS		
		F	E	X
42"	17 (IN)	8'–8"	8'–8"	3'–0"
	18 (OUT)	8'–8"	3'–2"	3'–0"
48"	19 (IN)	8'–8"	8'–8"	3'–6"
	20 (OUT)	8'–8"	3'–2"	3'–6"
54"	21 (IN)	8'–8"	8'–8"	4'–0"
	22 (OUT)	8'–8"	3'–2"	4'–0"
60"	23 (IN)	9'–4"	9'–4"	4'–4"
	24 (OUT)	9'–4"	3'–5"	4'–4"
66"	25 (IN)	9'–8"	9'–8"	4'–9"
	26 (OUT)	9'–8"	3'–6"	4'–9"
72"	27 (IN)	9'–8"	9'–8"	5'–3"
	28 (OUT)	9'–8"	3'–6"	5'–3"
78"	29 (IN)	10'–0"	10'–0"	5'–8"
	30 (OUT)	10'–0"	3'–8"	5'–8"
84"	31 (IN)	10'–8"	10'–8"	6'–0"
	32 (OUT)	10'–8"	3'–11"	6'–0"

* (IN) REFERS TO INLET
(OUT) REFERS TO OUTLET

DETAIL NO.			REVISED	DETAIL NO.
501-3	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	HEADWALL 42" TO 84" PIPE		501-3

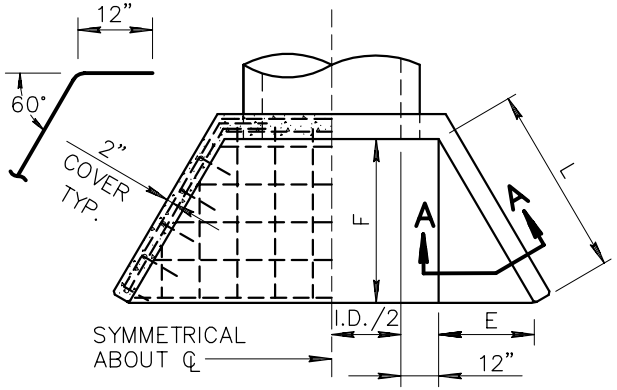

PLAN

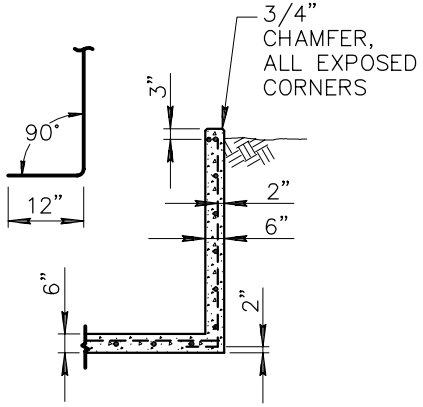

SECTION A–A

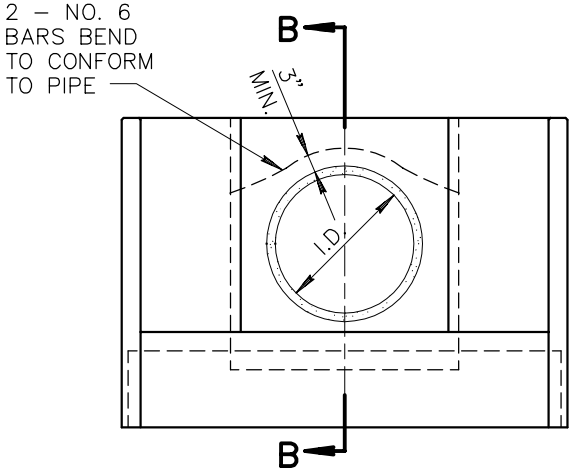

ELEVATION

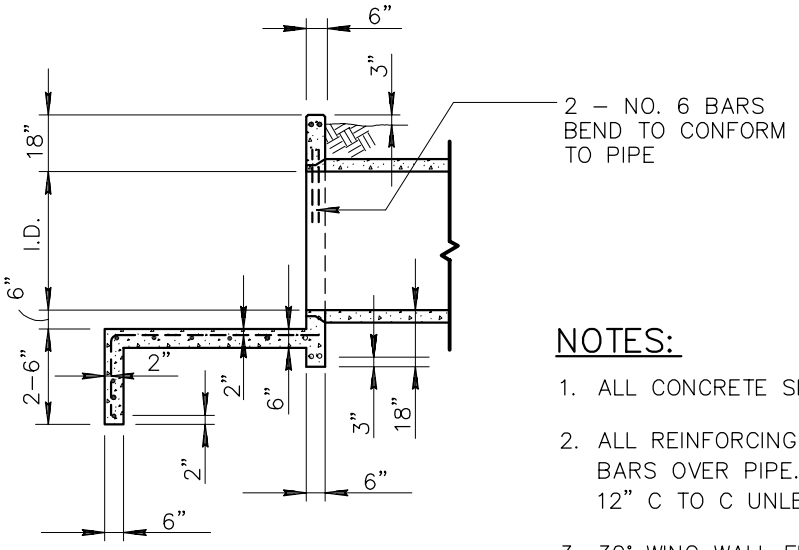

SECTION B–B

PIPE I.D.	DIMENSIONS		
	L	E	F (APPROX)
18"	2'–0"	1'–0"	1'–9"
24"	2'–0"	1'–0"	1'–9"
30"	3'–0"	1'–6"	2'–7"
36"	4'–0"	2'–0"	3'–6"
42"	5'–0"	2'–6"	4'–4"
48"	6'–0"	3'–0"	5'–2"
54"	7'–0"	3'–6"	6'–1"
60"	8'–0"	4'–0"	6'–11"

NOTES:

1. ALL CONCRETE SHALL BE CLASS 'A' PER SECT. 725.
2. ALL REINFORCING BARS SHALL BE NO. 4 EXCEPT NO. 6 BARS OVER PIPE. BAR SPACING APPROXIMATELY 12" C TO C UNLESS OTHERWISE NOTED.
3. 30° WING WALL FLARE SHOWN; 45° NORMALLY DESIRABLE.

DETAIL NO.			REVISED	DETAIL NO.
501-4	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	HEADWALL IRRIGATION 18" TO 60" PIPE		501-4

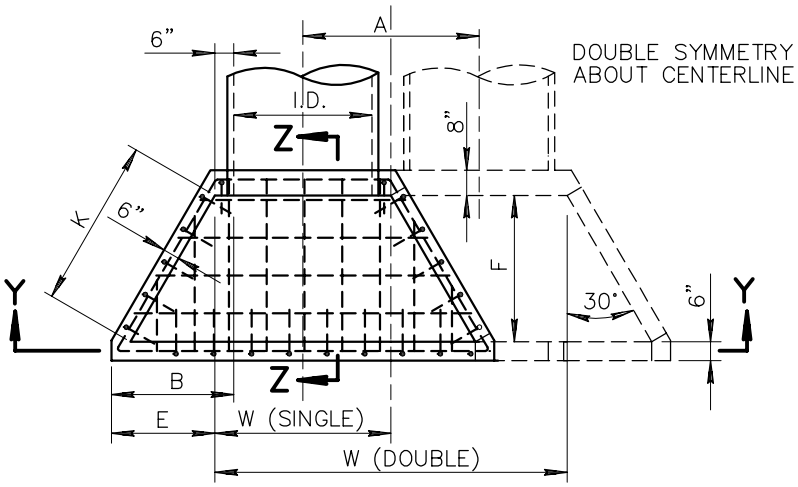

PLAN

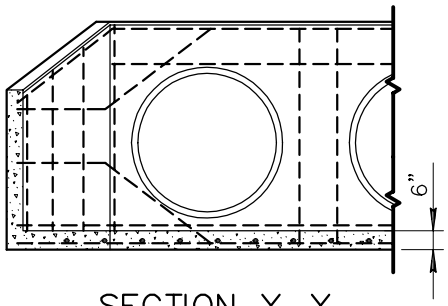

SECTION Y–Y

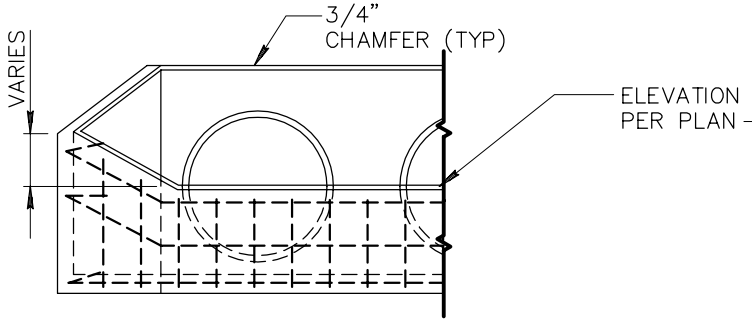

ELEVATION

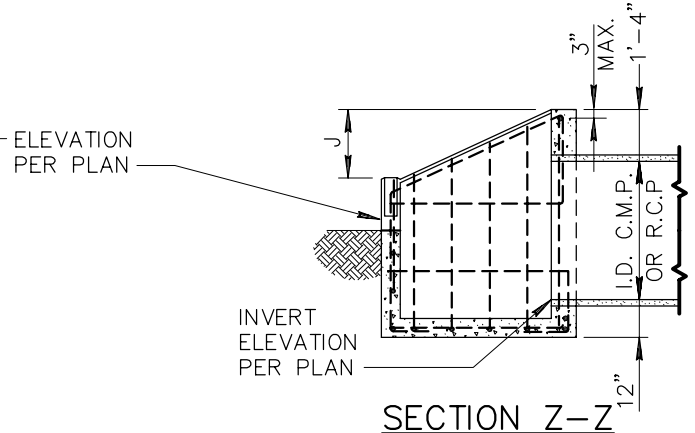

SECTION Z–Z

PIPE	DIMENSIONS							
I.D.	W		A	B	E	F	J	K
	SINGLE	DOUBLE						
18"	2'–6"	5'–2"	2'–8"	1'–3"	0'–9"	1'–3·5/8"	9"	1'–6"
24"	3'–0"	6'–6"	3'–6"	1'–7·1/2"	1'–1·1/2"	1'–11· 3/8"	11"	2'–3"
30"	3'–6"	7'–10"	4'–4"	2'–0"	1'–6"	2'–7·1/4"	1'–1"	3'–0"
36"	4'–0"	9'–2"	5'–2"	2'–4·1/2"	1'–10·1/2"	3'–3"	1'–4"	3'–9"
42"	4'–6"	10–6"	6'–0"	2'–9"	2'–3"	3'–10·3/4"	1'–6"	4'–6"

NOTES:

1. HIGH POINT OF HEADWALL SHALL NOT PROJECT MORE THAN 3" ABOVE SLOPE.
2. ALL CONCRETE SHALL BE CLASS 'A' PER SECT. 725.
3. ALL REINFORCING BARS SHALL BE NO. 4, 12" C TO C AND 3" CLEAR TO INSIDE OF FLOOR AND WALLS.

DETAIL NO.			REVISED	DETAIL NO.
501-5	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	HEADWALL DROP INLET		501-5

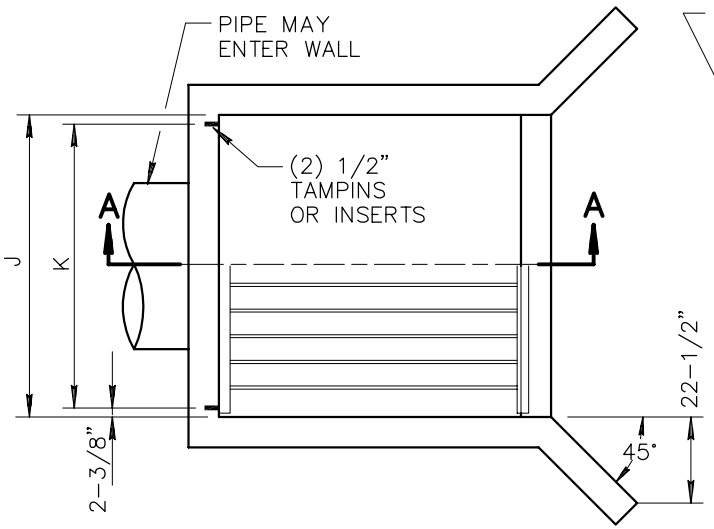

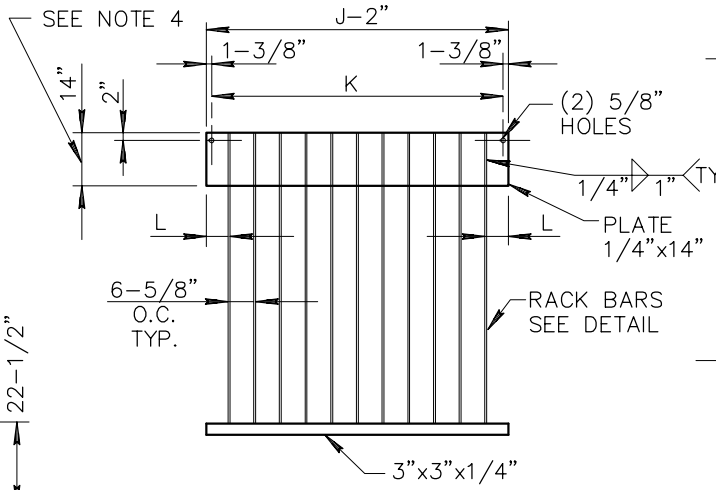

TRASH RACK

POURED WALLS



NO. 4 REINFORCED BARS 12" O.C. BOTH WAYS, CLASS 'A' CONC PER SECT. 505, 725 & 727.

BLOCK WALLS



BLOCK HEADWALL TO HAVE ONE NO.4 REINF. BAR CENTERED IN EACH CORE FOR FULL HEIGHT AND CORES FILLED WITH CONCRETE OR CEMENT GROUT (3:1 RATIO). ALL BLOCKS TO BE JOINTED WITH MORTAR. PLASTERED ON EXPOSED SURFACES THEN SPRAY WITH WHITE PIGMENTED CURING COMPOUND. SECT. 510, 727 & 776.

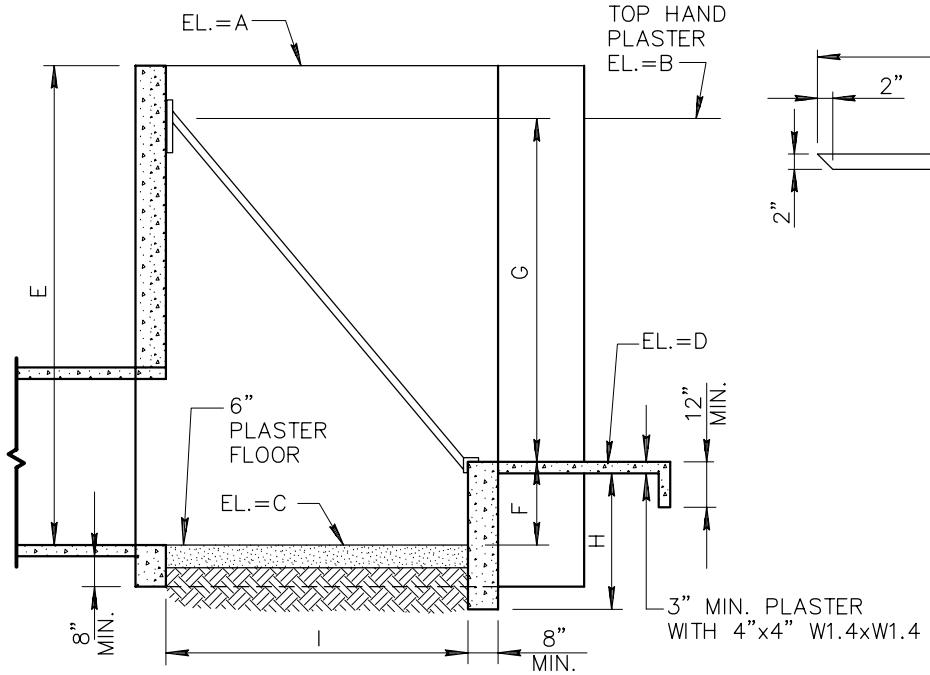

SECTION A-A

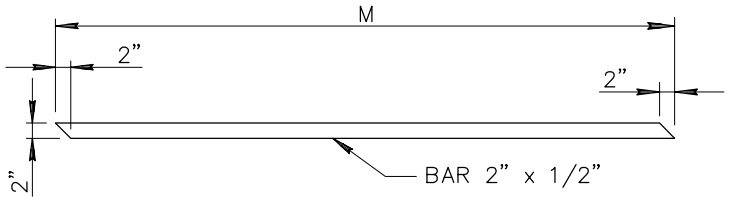

RACK BARS

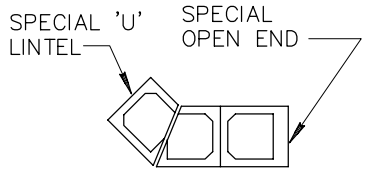

45° BLOCK CORNER

NOTES:

1. REMOVE ALL SCALE FROM RACK BARS. METAL SPRAY OR PAINT WITH ONE COAT ZINC CHROMATE OR RED LEAD PRIMER (INDUSTRIAL QUALITY). OVERCOAT WITH GREY INDUSTRIAL ENAMEL SECT. 790.
2. SHAPE, COMPACT AND PLASTER NEW DITCH FROM HEADWALL TO UNDISTURBED EXISTING DITCH. PLASTER TO EXTEND TO MINIMUM ELEVATION NOTED 3 FEET BEYOND CONNECTION TO UNDISTURBED EXISTING DITCH.
3. ELEVATIONS A, B, C & D AND DIMENSIONS E, F, G, H, I, J, K, L & M WILL BE SHOWN ON PLANS. DIMENSIONS SHOULD PROVIDE STANDARD SIZE BLOCK.
4. 14" PLATE SHALL NOT EXTEND BELOW TOP OF PIPE.

DETAIL NO.			REVISED	DETAIL NO.
502-1	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	TRASH RACK		502-1

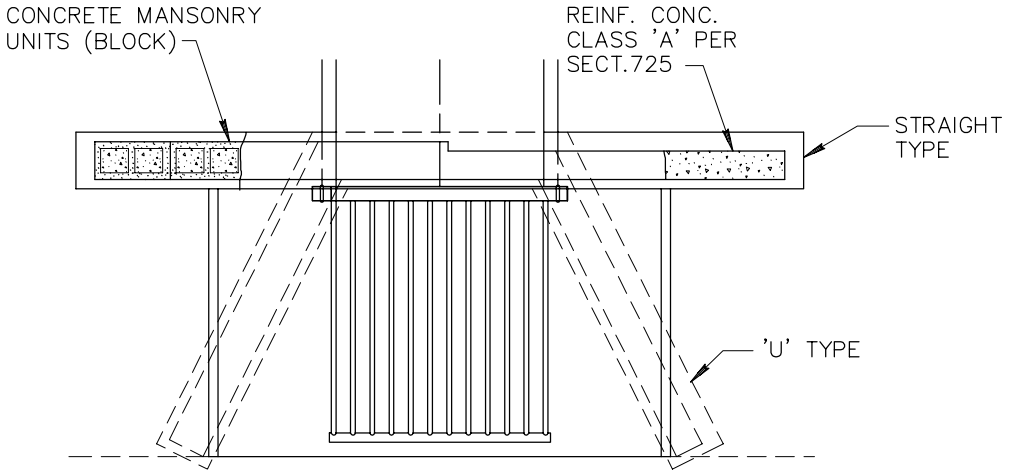

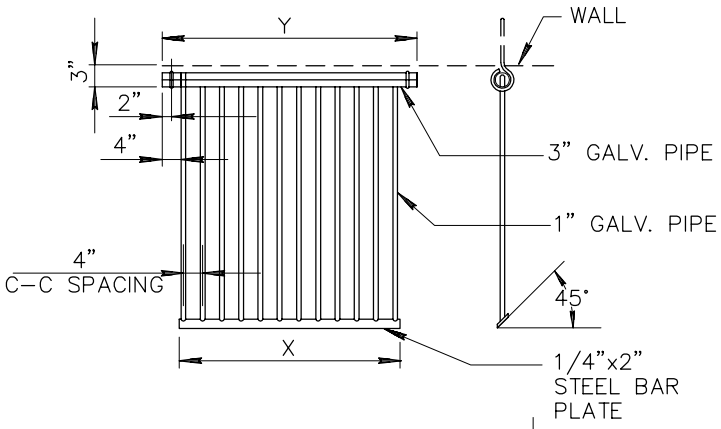

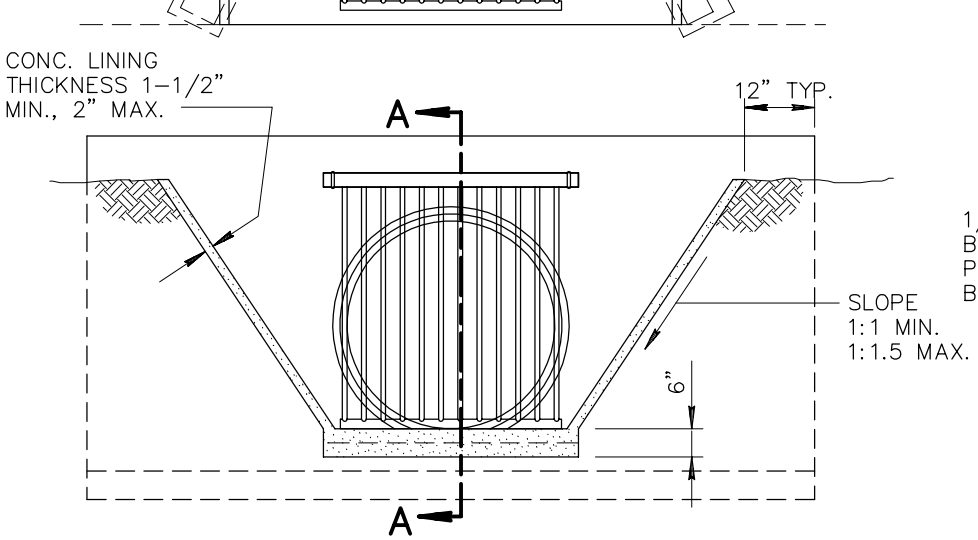

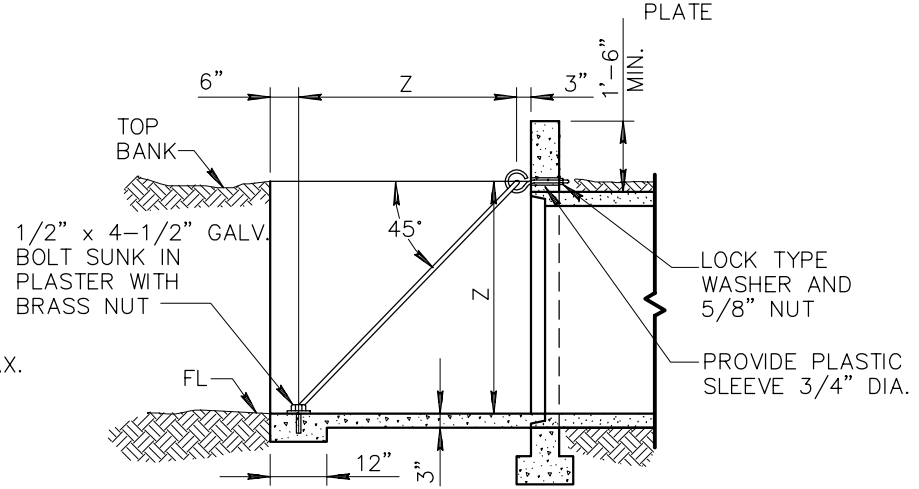

SECTION A-A

TYPE BASED ON PIPE SIZE						
TYPE	PIPE SIZE	NO. OF BARS	LENGTH OF BARS	DIMENSIONS		
				X	Y	Z
A	18"	6	3'-7"	1'-9"	2'-5"	2'-5"
	24"	8	3'-7"	2'-5"	3'-1"	2'-5"
B	30"	10	4'-4•1/4"	3'-1"	3'-9"	2'-11•1/2"
C	36"	10	5'-1•1/2"	3'-1"	3'-9"	3'-6"
D	42"	12	5'-10•5/8"	3'-9"	4'-5"	4'-0•1/2"
E	48"	14	6'-7•3/4"	4'-5"	5'-1"	4'-7"

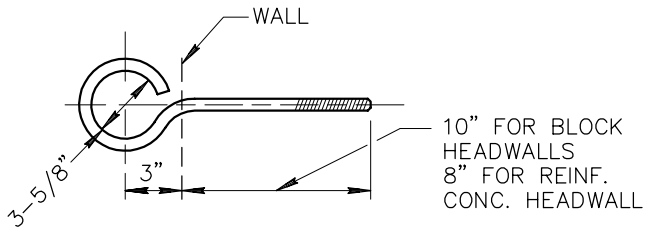

EYE BOLT

DETAIL NO.			REVISED	DETAIL NO.
502-2	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	TRASH RACK	01-01-2004	502-2

NOTE:
PAINT COVER BOTH SIDES ONE PRIME COAT, TWO FINISH COATS, SECT. 790, PAINT NO. 9

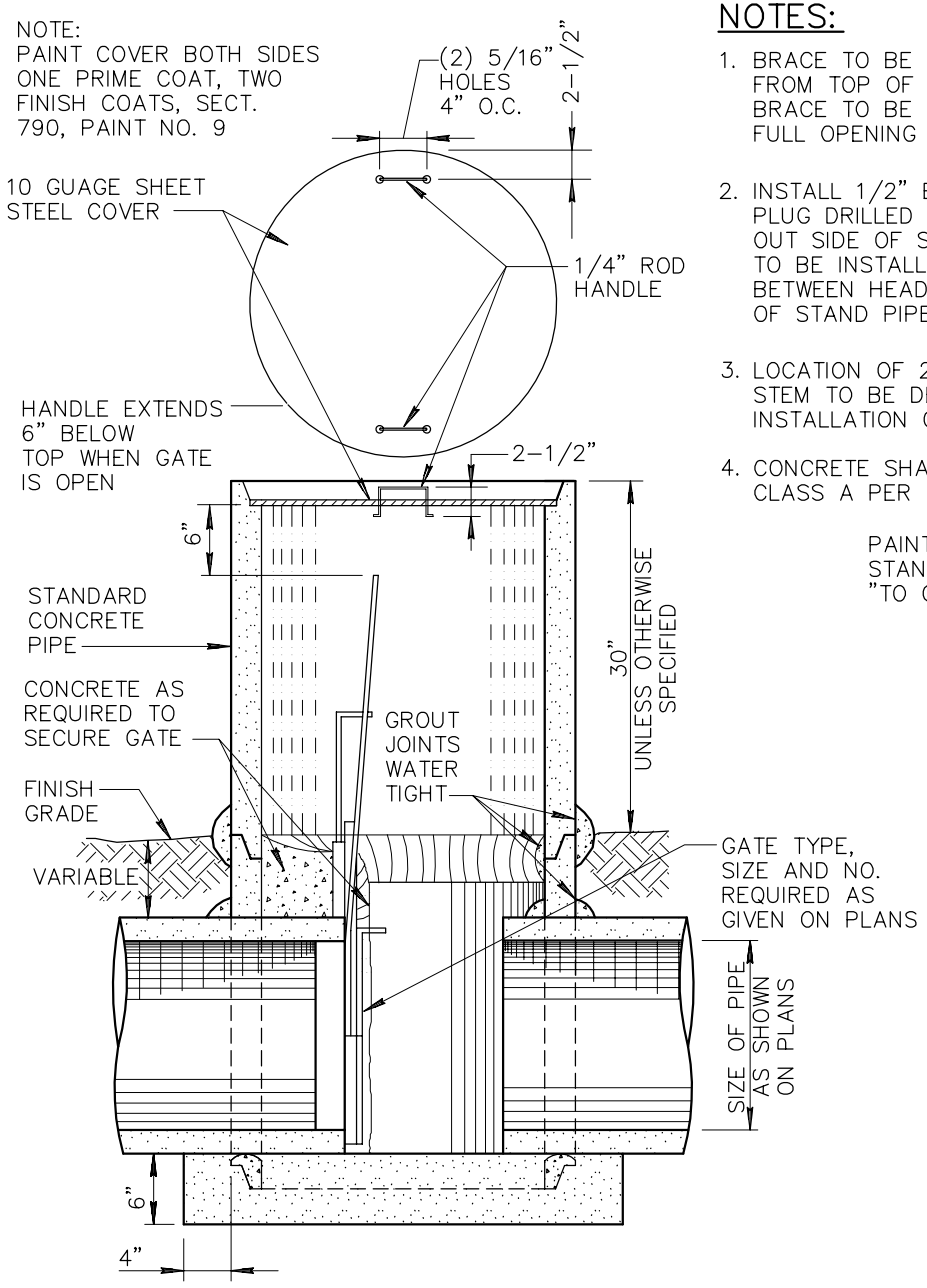

TYPE 'A'

NOTES:

1. BRACE TO BE INSTALLED EVERY 2' FROM TOP OF HEADGATE FRAME. BOTTOM BRACE TO BE HIGH ENOUGH TO ENABLE FULL OPENING OF HEADGATE.
2. INSTALL 1/2" BOLTS INTO LEAD PLUG DRILLED TO WITHIN 1" OF OUT SIDE OF STANDPIPE. SPACERS TO BE INSTALLED AT EACH BOLT BETWEEN HEADGATE FRAME AND INSIDE OF STAND PIPE.
3. LOCATION OF 2" HOLE FOR GATE STEM TO BE DETERMINED AFTER INSTALLATION OF GATE.
4. CONCRETE SHALL BE CLASS A PER SECT. 725.

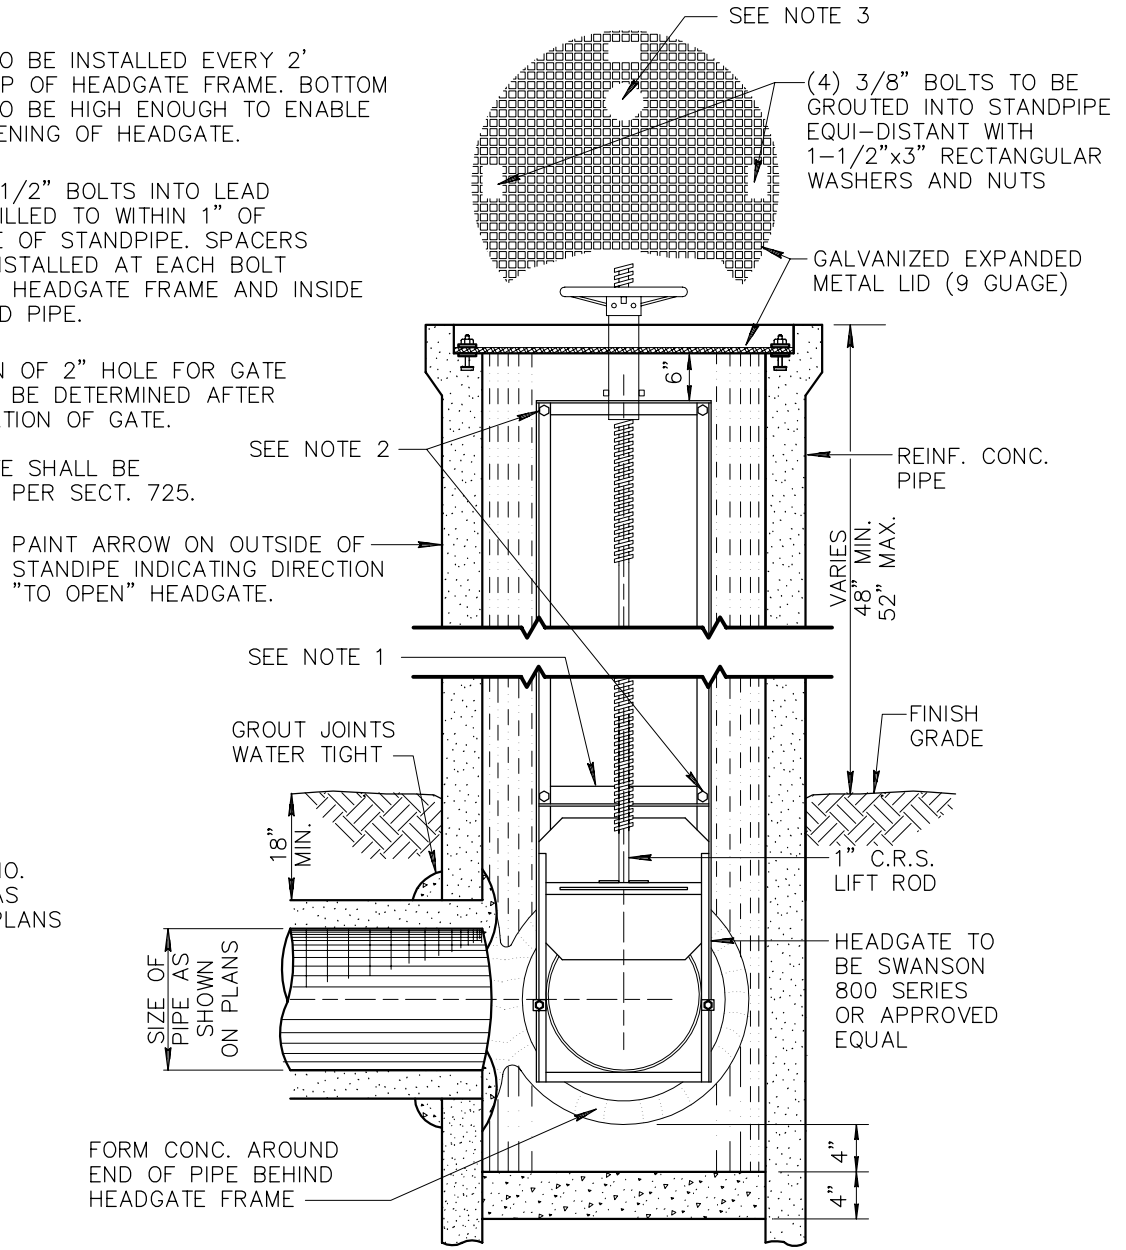

TYPE 'B'

DETAIL NO.			REVISED	DETAIL NO.
503	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**IRRIGATION STANDPIPE**		503

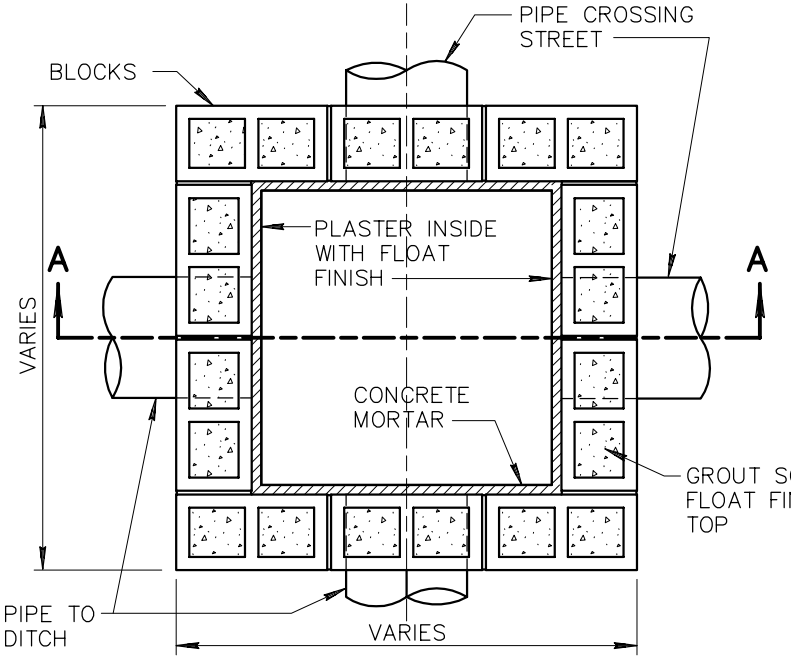

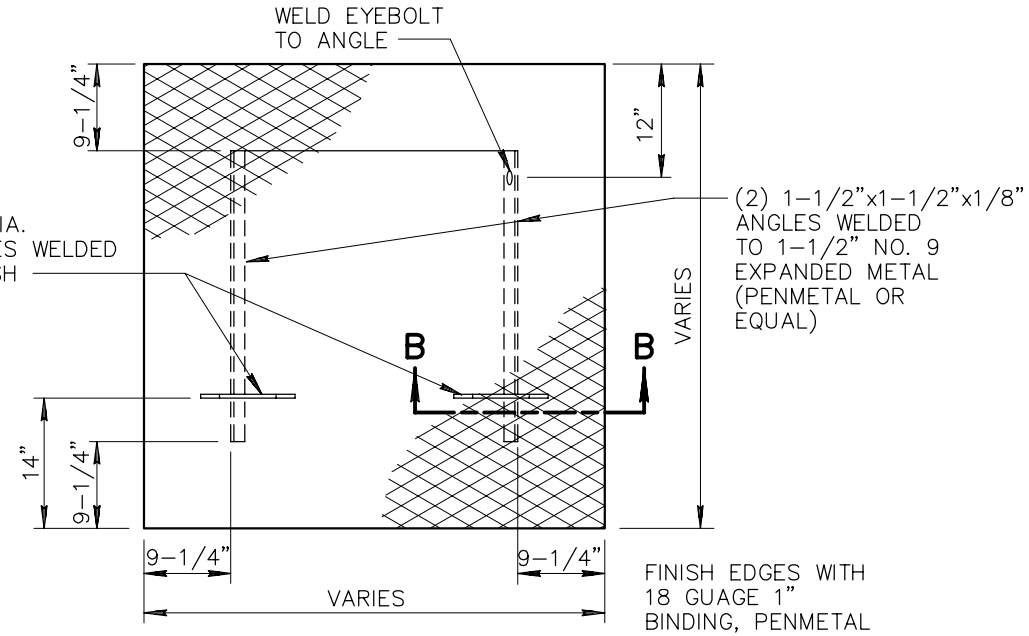

PLAN OF COVER

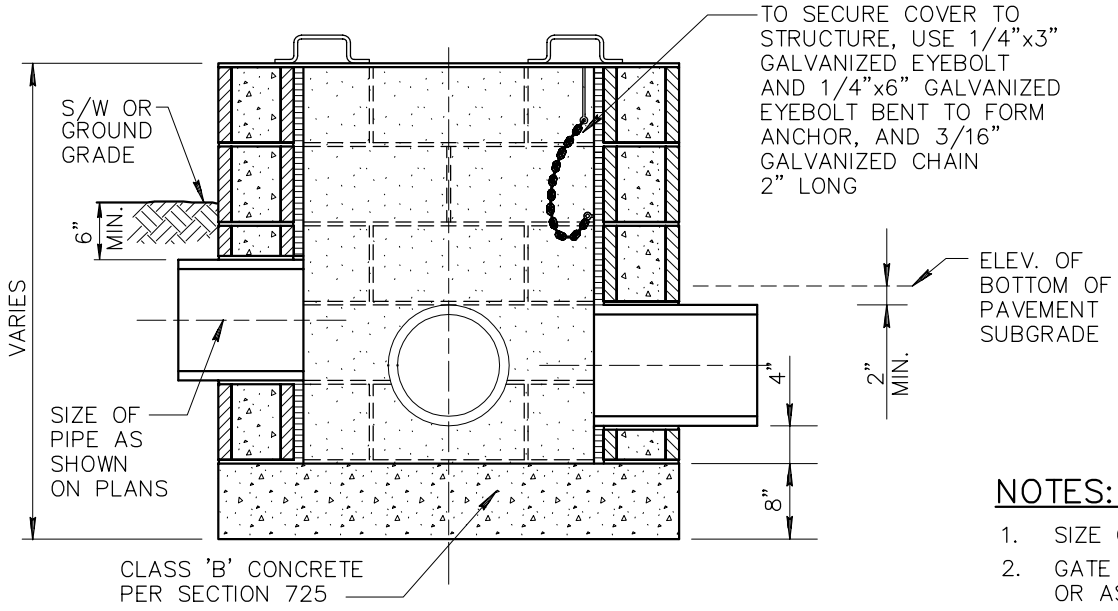

SECTION A–A

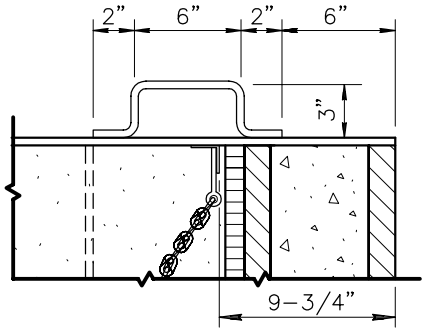

SECTION B–B

NOTES:

1. SIZE OF JUNCTION BOX TO BE DETERMINED BY THE ENGINEER.
2. GATE TYPE, SIZE AND NUMBER REQUIRED AS SHOWN ON PLANS OR AS SPECIFIED.
3. CONCRETE MASONRY UNITS (BLOCK) PER SECT. 510, 775 & 776

DETAIL NO.			REVISED	DETAIL NO.
504	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CONCRETE BLOCK JUNCTION BOX		504

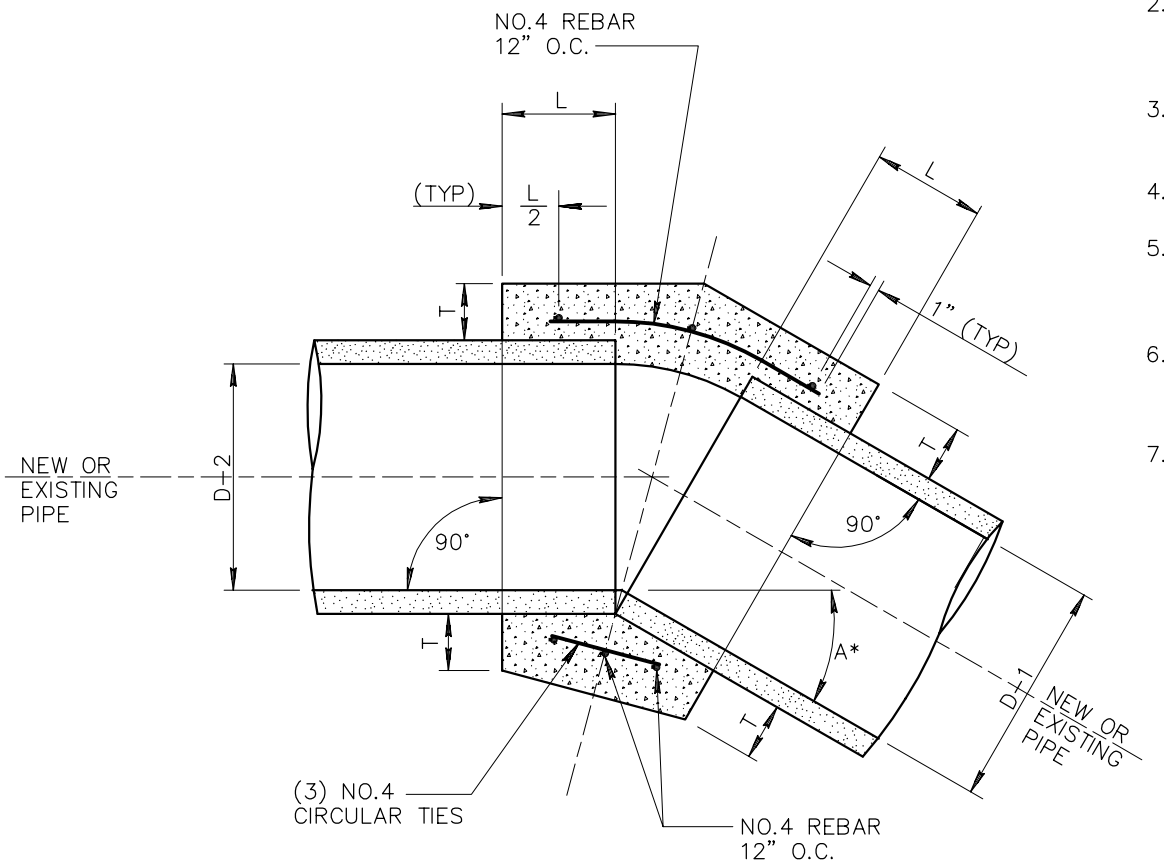

NOTES:

1. A CONCRETE COLLAR IS REQUIRED WHERE PIPES OF DIFFERENT DIAMETERS OR MATERIALS ARE JOINED, OR WHERE THE CHANGE IN ALIGNMENT OR GRADE EXCEEDS THAT ALLOWED FOR ON ORDINARY JOINTS.
2. WHERE PIPES OF DIFFERENT DIAMETERS ARE JOINED WITH A CONCRETE COLLAR, L AND T SHOULD BE THOSE OF THE LARGER PIPE. D=D−1, OR D−2 WHICHEVER IS GREATER.
3. FOR PIPE SIZES NOT LISTED AND LESS THAN 66" USE NEXT SIZE LARGER.
4. OMIT REINFORCING ON PIPE 24" OR LESS IN DIAMETER.
5. WHERE REINFORCING IS REQUIRED, THE DIAMETER OF THE CIRCULAR TIES SHALL BE....
   OUTSIDE DIAMETER OF PIPE+T.
6. FIELD CLOSURES OF PIPE OF THE SAME DIAMETER AND WITHOUT CHANGE IN GRADE OR ALIGNMENT SHALL BE MADE WITH A CONCRETE COLLAR.
7. CONCRETE SHALL BE CLASS B PER SECT. 725.

A*=ANGLE OF DEFLECTION

TABLE		
D	L	T
12"	1.0'	4"
18"	1.0'	5"
24"	1.0'	6"
36"	1.5'	8"
48"	1.5'	10"
57"	1.5'	10"
60"	1.75'	11"
66"	1.75'	11"

DETAIL NO.			REVISED	DETAIL NO.
505	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CONCRETE PIPE COLLAR		505

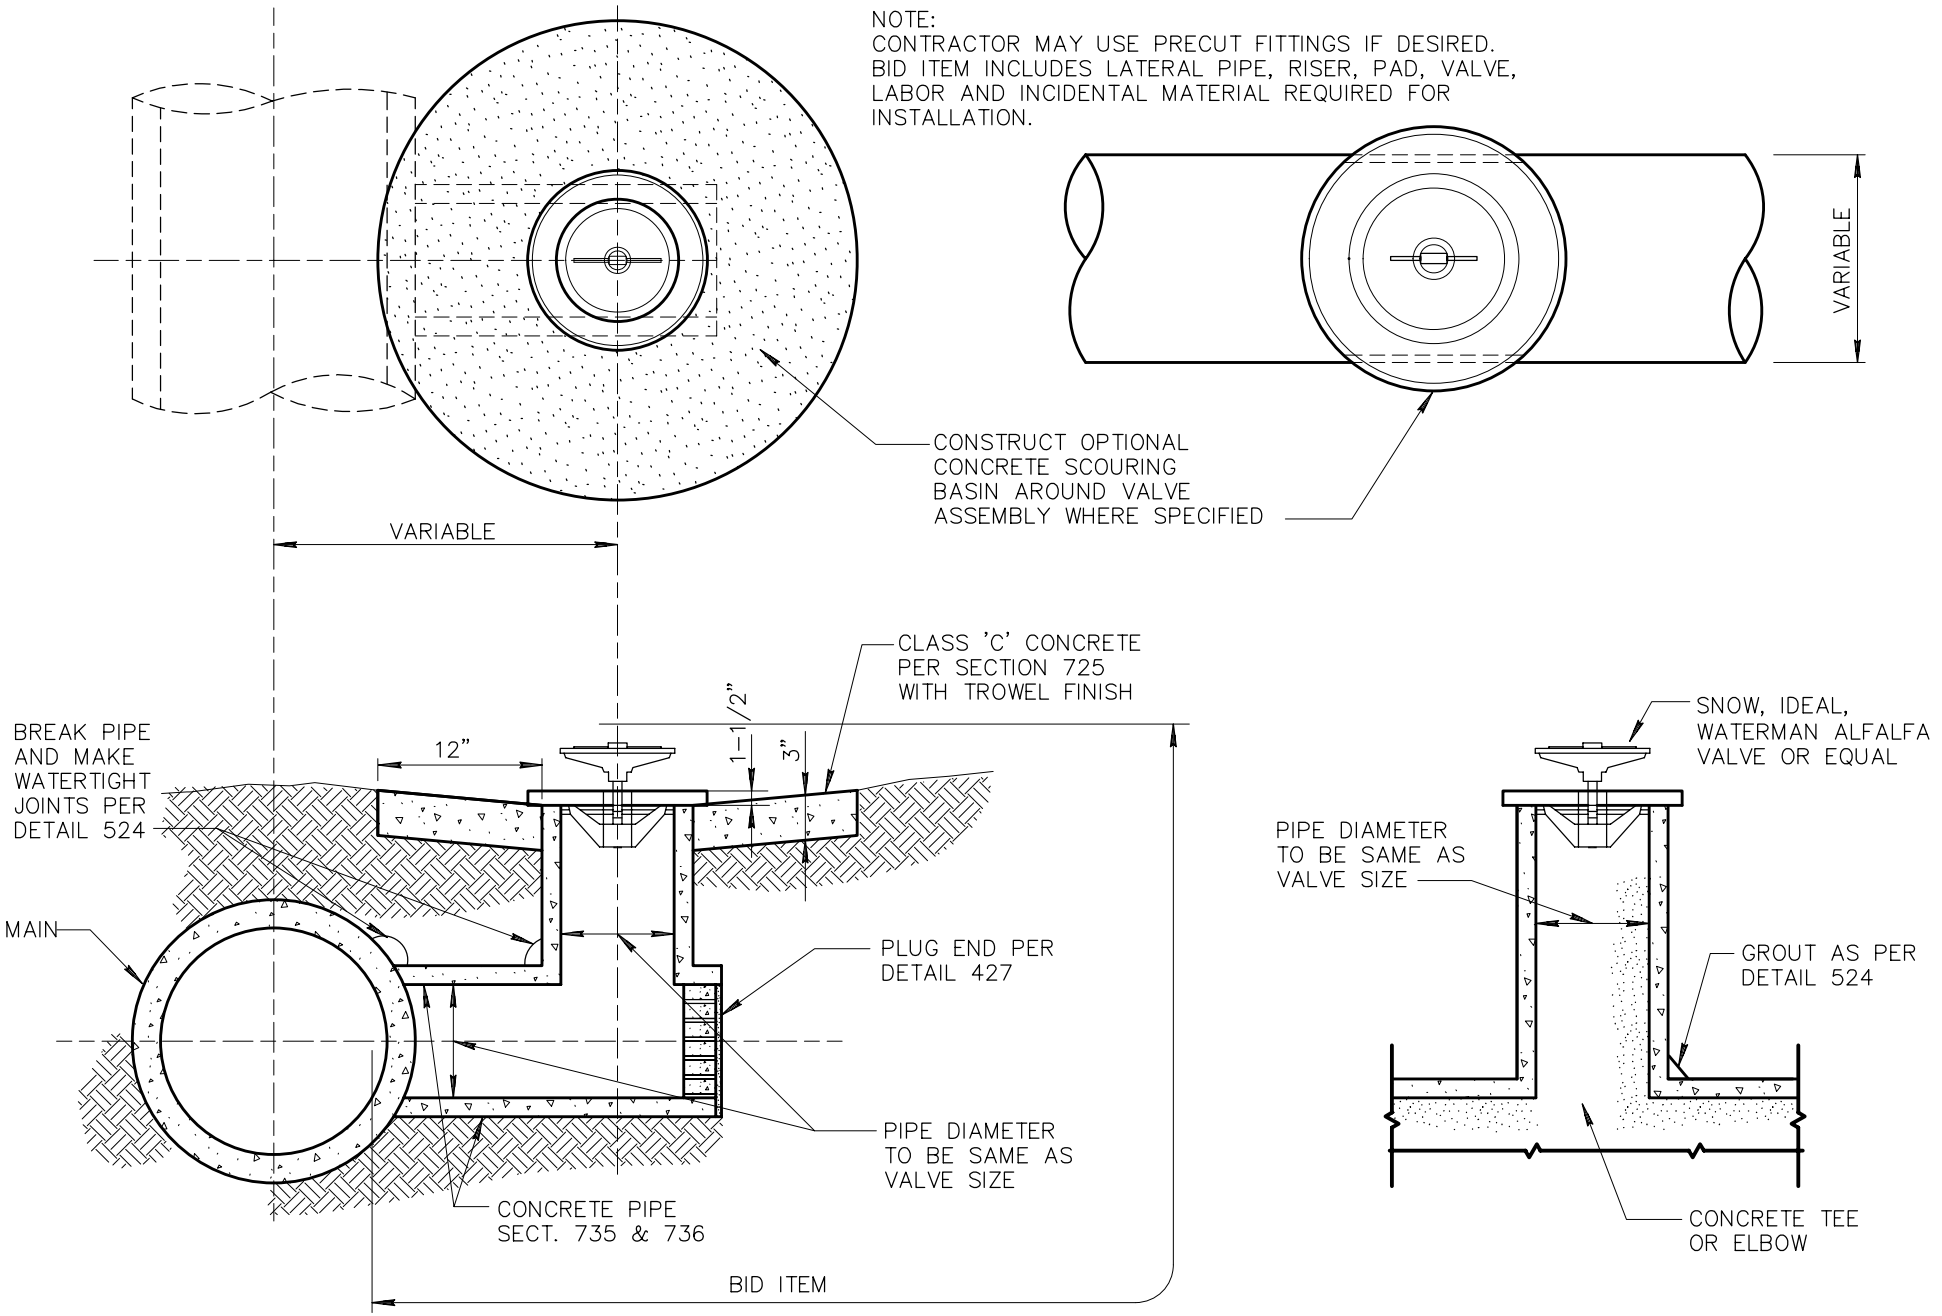

DETAIL NO.			REVISED	DETAIL NO.
506	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	IRRIGATION VALVE INSTALLATION		506

NOTES:

1. THIS DETAIL SHALL BE REQUIRED WHEN NEW OR EXISTING PIPE INSTALLATIONS WILL BE SUBJECT TO DAMAGE ANYTIME IN THE FUTURE DUE TO LACK OF PROPER COVER, AS DETERMINED BY THE ENGINEER.

2. FOR PIPE OVER 18" I.D. WOOD, METAL OR GYPSUM BOARD FORMS MUST BE USED TO FORM THE SIDES OF THE ENCASEMENT. GYPSUM BOARD FORMS MAY BE LEFT IN THE GROUND BELOW THE TOP OF THE ENCASEMENT. THIS SHALL BE OPTIONAL WITH POURING AGAINST TRENCH WALLS FOR ENCASEMENT OF 18" AND SMALLER PIPE.

3. FOR ALL SITUATIONS WHERE SIDE FORMS ARE USED, TRENCH WALLS SHALL BE OVER-EXCAVATED TO ALLOW SUFFICIENT ROOM TO OPERATE PROPER MECHANICAL COMPACTION EQUIPMENT.

4. CONCRETE WHICH SPILLS BEYOND 12" FROM THE SIDES OF THE PIPE FOR ANY REASON SHALL BE REMOVED BACK TO THE PROPER LINE PRIOR TO BACKFILLING.

5. SEE SECTION 601 FOR TRENCH PREPARATION.

6. CONCRETE TO BE CLASS 'A' PER SECT. 725.

7. COVER TO BE APPROVED BY ENGINEER.

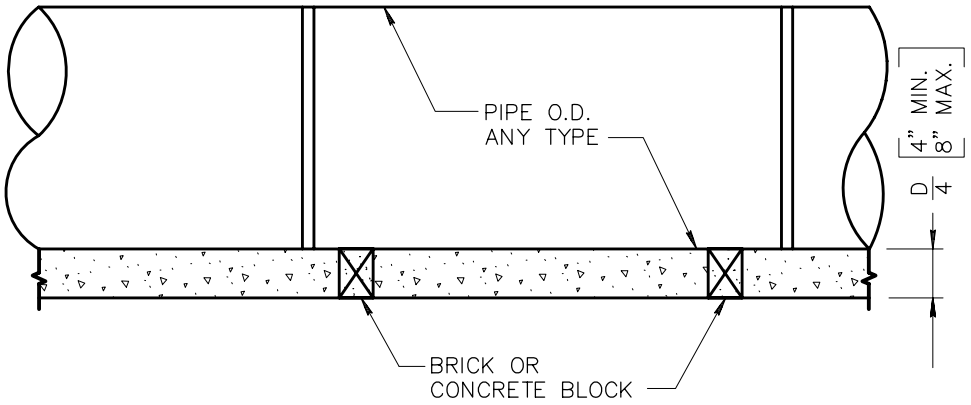

LONGITUDINAL SECTION

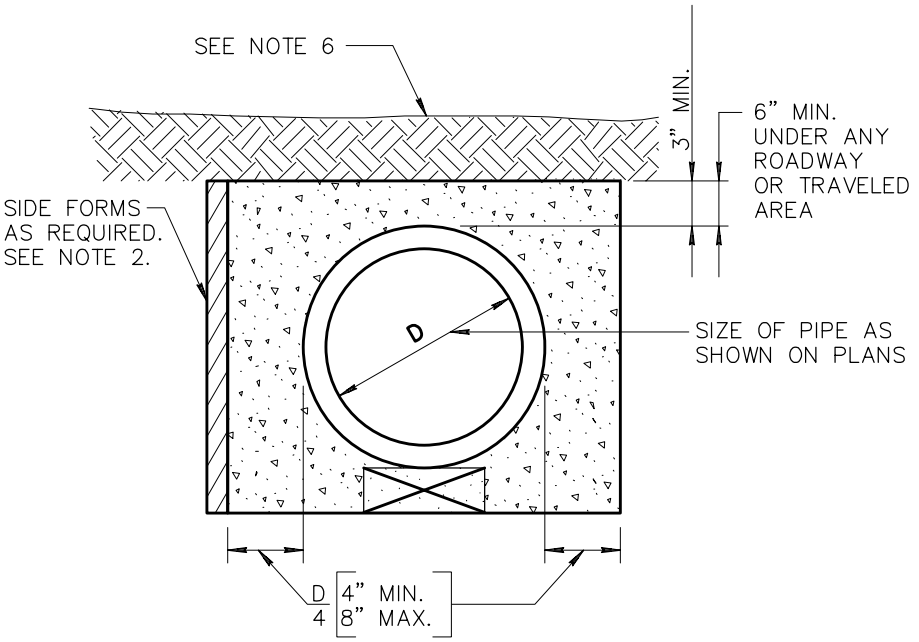

END SECTION

DETAIL NO.			REVISED	DETAIL NO.
507	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	ENCASED CONCRETE PIPE (FOR SHALLOW INSTALLATION)		507

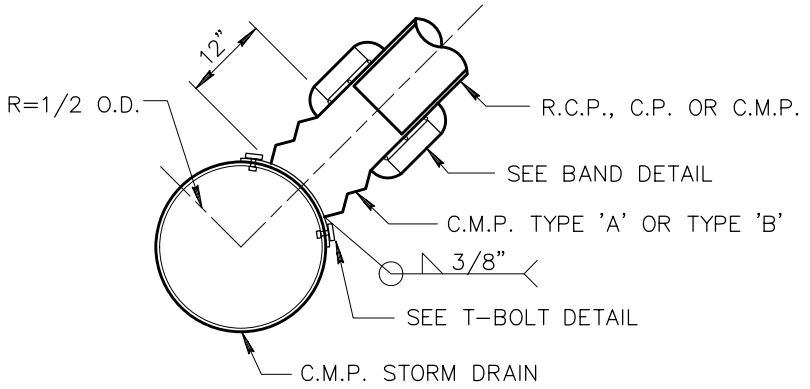

CONNECTOR CROSS SECTION

NOTE:
USE 5/8" WASHER AND NUT, ALL PIECES (NUTS, WASHERS, AND FABRICATED BOLTS) TO BE GALVANIZED AS PER A.S.T.M. A-123 LATEST REVISION.

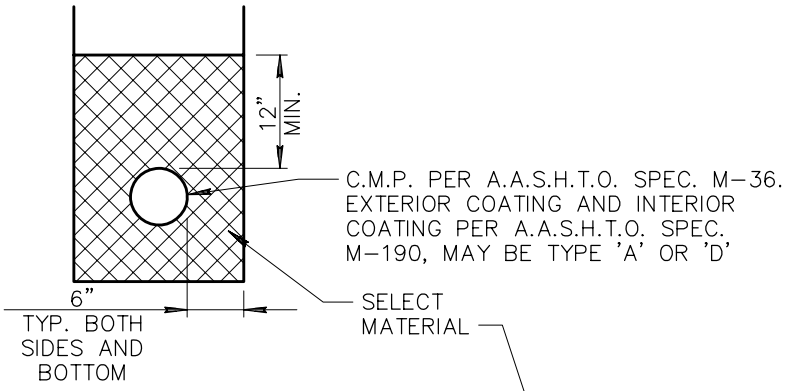

SECTION A-A



T-BOLT

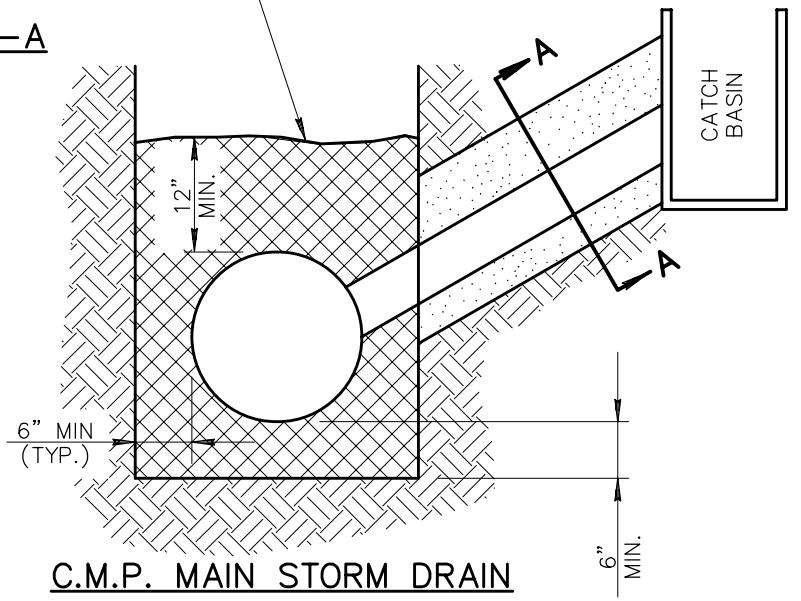

C.M.P. MAIN STORM DRAIN

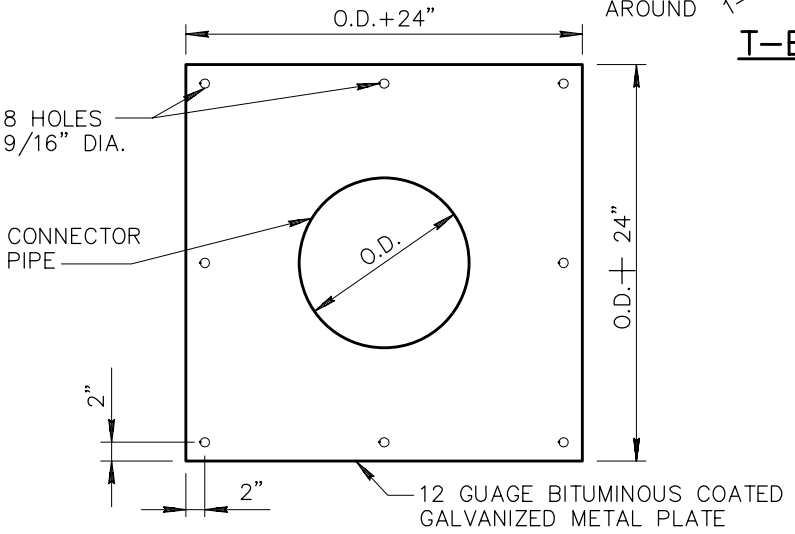

C.M.P. CONNECTION TO MAIN STORM DRAIN 24" PIPE AND SMALLER

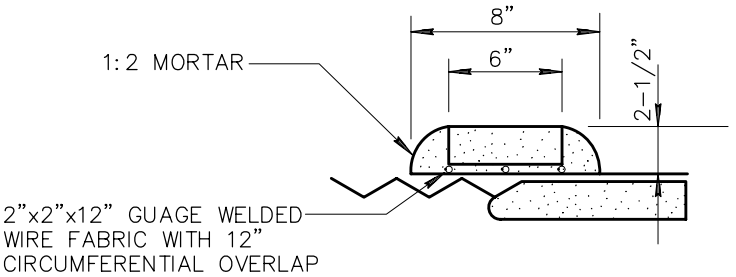

BAND DETAIL

DETAIL NO.			REVISED	DETAIL NO.
510	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CORRUGATED METAL PIPE AND INSTALLATION		510

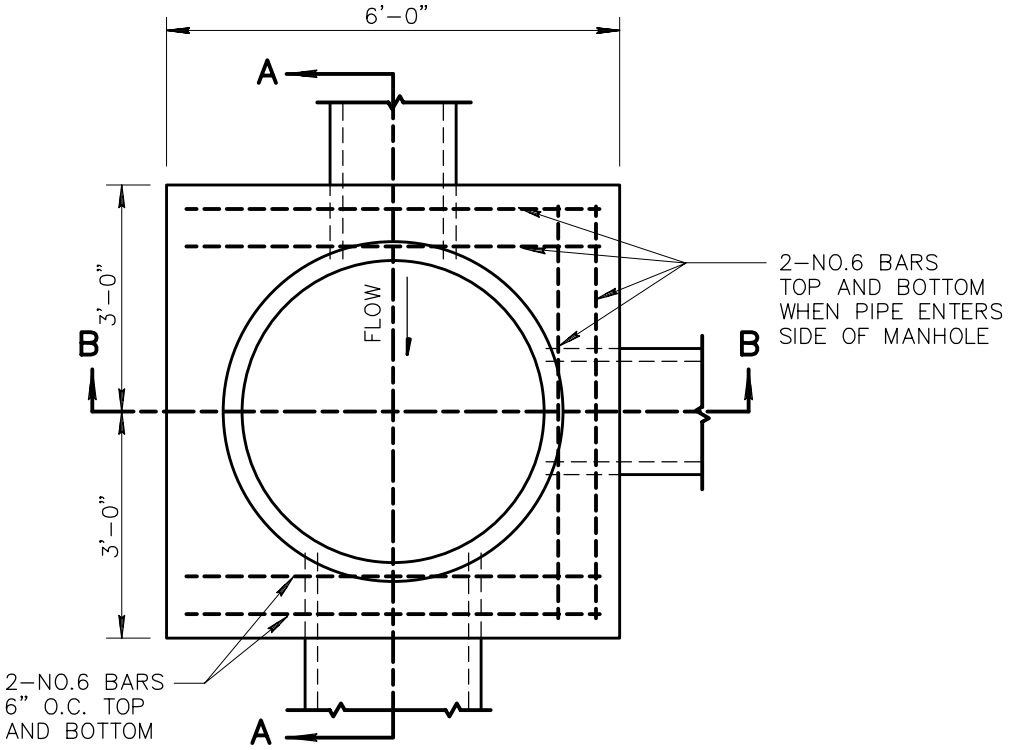

PLAN

NOTES

1. ALL CONCRETE TO BE CLASS 'A' PER SECT. 725, 505.
2. MATCH SPRING LINES OF PIPE ENTERING MANHOLE UNLESS OTHERWISE NOTED.
3. CUT PIPES TO ALLOW SETTING OF 4' DIA. CYLINDRICAL FORM FROM 6" ABOVE MAIN LINE PIPE TO SPRING LINE. CUT PIPE 2" LARGER THAN FORM TO ALLOW 2" CONCRETE OVER ENDS OF ALL CUT PIPE.
4. INVERT AND BASE OF MANHOLE TO BE POURED AND INVERT TO BE SHAPED BY HAND TO MAKE SMOOTH TRANSITION. FINISH WITH RUBBER FLOAT.
5. CENTER MANHOLE ON PIPE JOINT WHERE PIPE CHANGES SIZES, LEAVING A GAP OF 12" MINIMUM, 24" MAXIMUM.

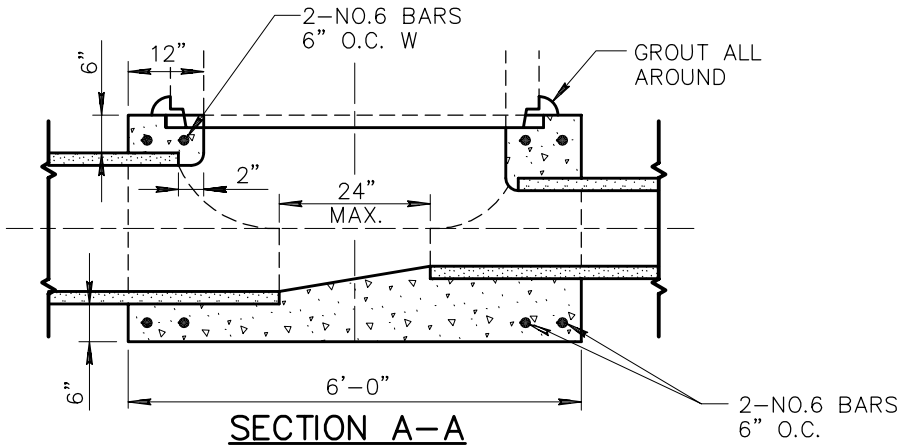

SECTION A-A

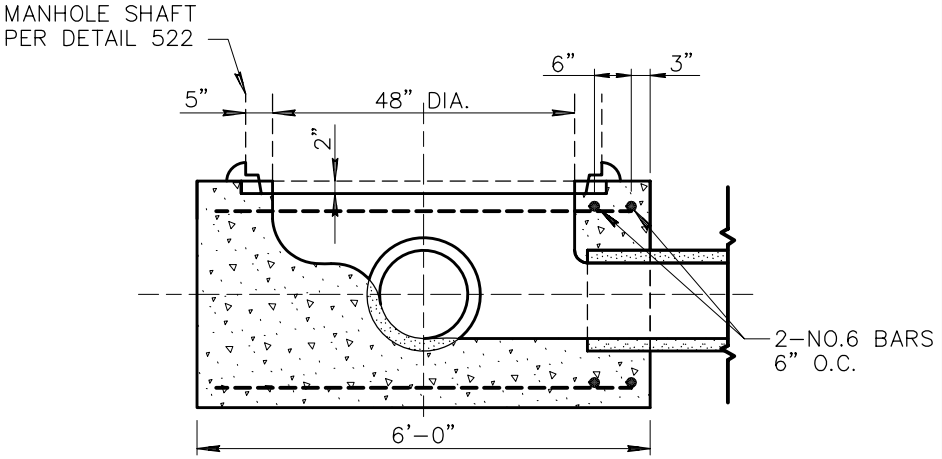

SECTION B-B

DETAIL NO.			REVISED	DETAIL NO.
520	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	STORM DRAIN MANHOLE BASE (48" AND SMALLER)		520

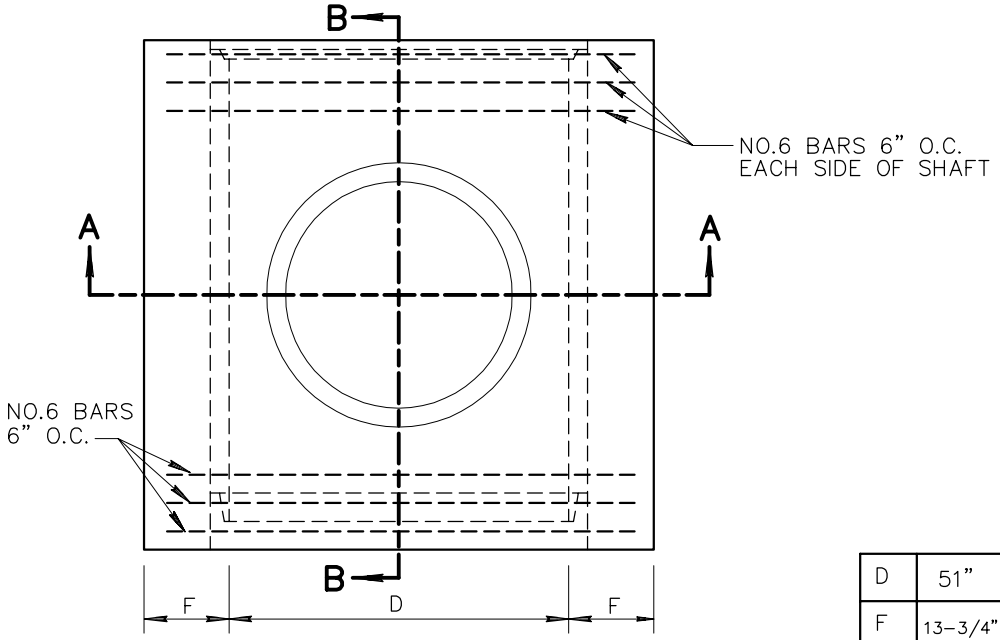

PLAN

NOTES:

1. LINE PIPE AND STUB MAY BE CAST MONOLITHICALLY OR STUB MAY BE CAST ON TO LINE PIPE SECTION PRIOR TO COMPLETE CURING.
2. ALL LINE PIPE REINFORCEMENT SHALL BE TURNED UP INTO STUB.
3. THE VERTICAL STUB TO BE A.S.T.M. C-76 CLASS II WALL 'A' AND THE HORIZONTAL PIPE TO BE EQUAL TO STRENGTH OF PIPE ENTERING MANHOLE.
4. ALL REINFORCING STEEL SHALL CLEAR FACE OF CONCRETE BY 1-1/2" UNLESS SHOWN OTHERWISE.
5. CONCRETE ENCASEMENT SHALL BE CLASS 'A' PER SECT. 725 AND 505.

TABLE OF VALUES FOR 'F' & 'D'

D	51"	54"	57"	60"	63"	66"	69"	72"	78"	84"	90"	96"
F	13-3/4"	14-1/2"	15"	15-1/2"	16-1/4"	16-3/4"	17-1/2"	18"	19-1/4"	20-1/2"	21-3/4"	23"

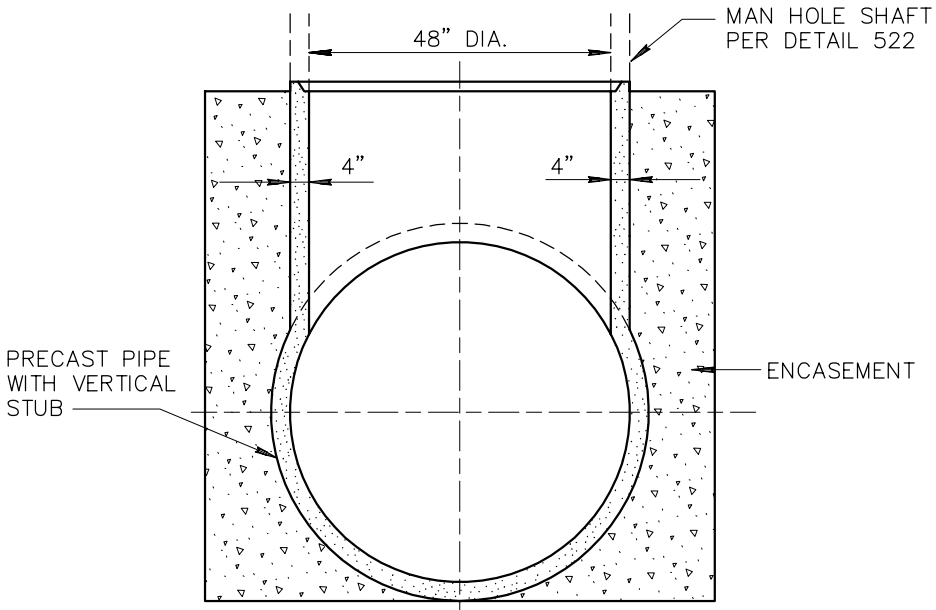

SECTION A-A

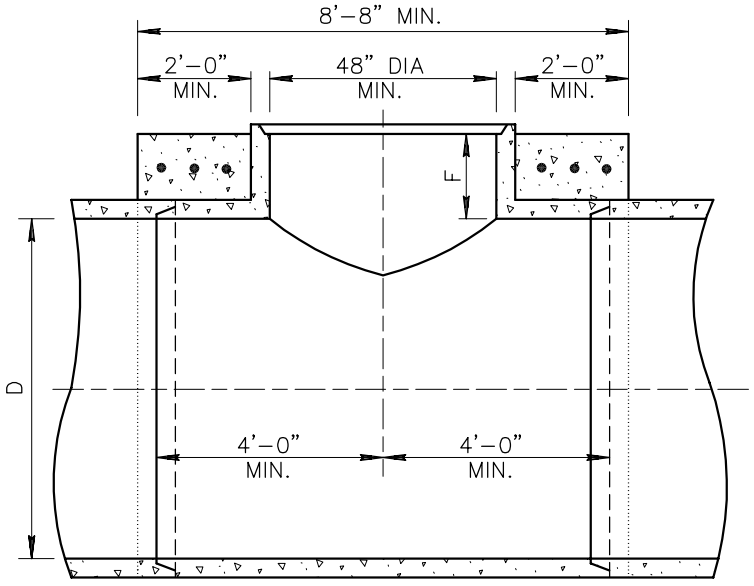

SECTION B-B

DETAIL NO.			REVISED	DETAIL NO.
521	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	STORM DRAIN MANHOLE BASE (51" OR LARGER)		521

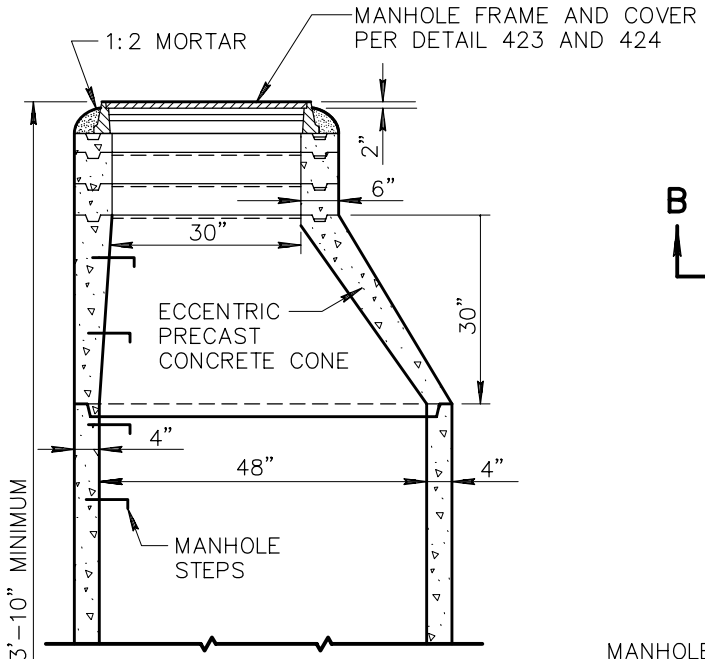

ALL JOINTS SHALL BE FILLED WITH 1:2 MORTAR AND NEATLY POINTED OR WIPED ON INSIDE OF SHAFT.

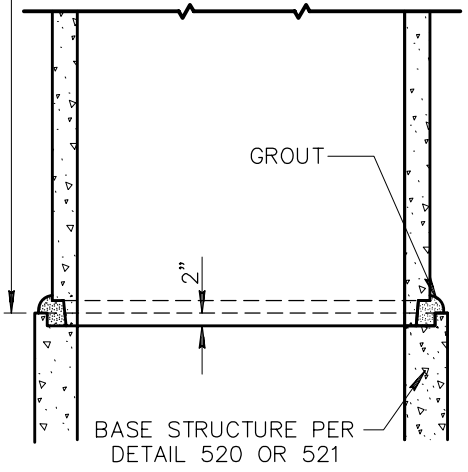

VERTICAL SECTION OF ECCENTRIC MANHOLE SHAFT

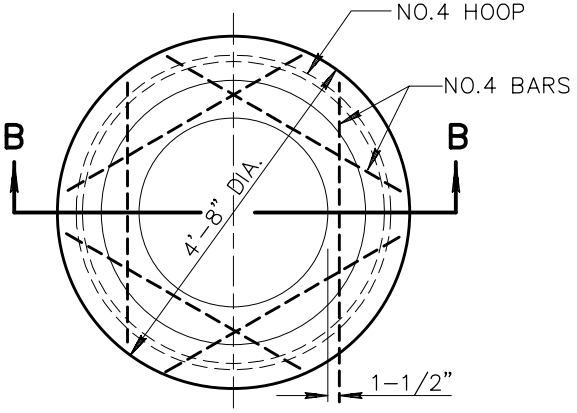

PLAN

USE WHERE THERE IS 3'-10" OR LESS COVER OVER PIPE

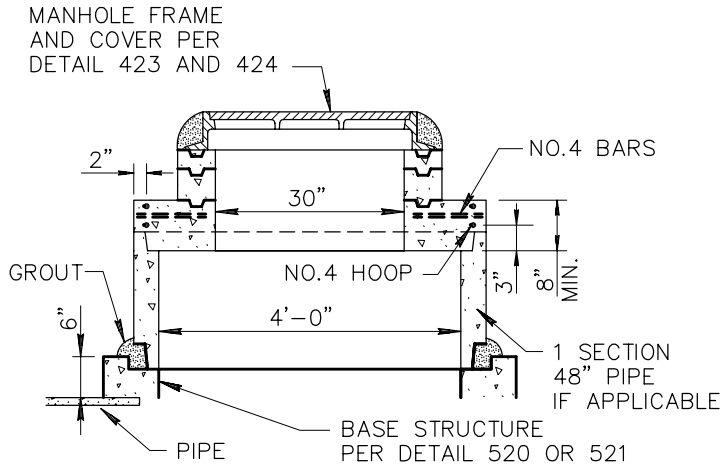

SECTION B-B

SHALLOW MANHOLE

NOTES:

1. PRECAST CONCRETE CONES AND SECTIONS TO BE A.S.T.M. C-478.
2. BRICK MAY BE USED IN LIEU OF OR IN COMBINATION WITH CONCRETE ADJUSTING RINGS.
3. PRECAST CONCRETE SECTIONS 48" DIA PIPE MAY BE FURNISHED IN STANDARD LENGTHS.
4. UNLESS OTHERWISE SHOWN ON PLANS, USE (2) 2-1/2" PRECAST CONCRETE ADJUSTING RINGS ON IMPROVED STREETS AND (4) 2-1/2" RINGS ON UNIMPROVED STREETS.
5. MANHOLE STEPS SHALL BEGIN 2'-0" BELOW FINISHED GRADE AND CONTINUE AT 12" INTERVALS TO APPROXIMATELY 2' ABOVE MANHOLE SHELF. (AS REQUIRED BY AGENCY.)
6. CONCRETE SHALL BE CLASS A PER SECTION 725 AND 505.

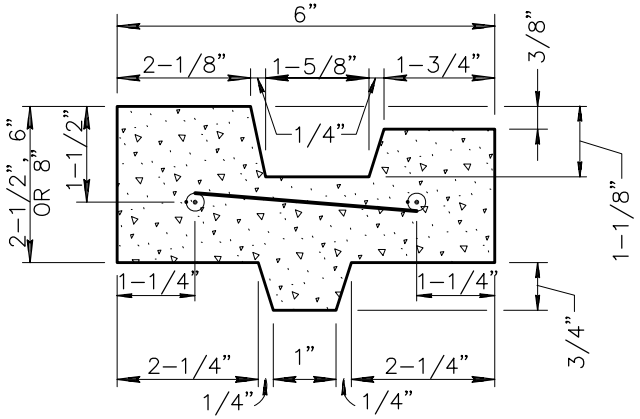

2-1/2" RINGS SHALL BE REINFORCED WITH TWO 1/4" ROUND STEEL HOOPS; 6" AND 8" RINGS SHALL BE REINFORCED WITH FOUR 1/4" HOOPS, TIED WITH NO. 14 A.S.& W. GAUGE WIRE 8" O.C.

REINFORCED CONCRETE ADJUSTING RING

DETAIL NO.			REVISED	DETAIL NO.
522	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	STORM DRAIN MANHOLE SHAFT		522



COVER SECTION

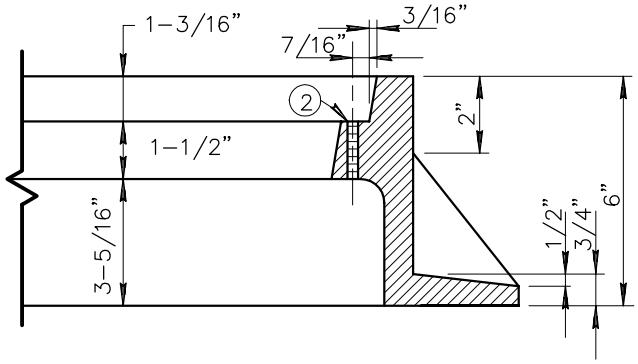

FRAME SECTION

FOR A 30" M.H. OPENING, USE THE STD. WATER TIGHT 30" M.H. FRAME & COVER, AND ANCHOR THE FRAME AS OUTLINED IN THE INSTRUCTIONS NOTED ON THIS SHEET.

FOR A 24" M.H. OPENING, MODIFY THE STD. 24" M.H. FRAME & COVER, FOLLOWING THE NOTED PROCEDURES, ONE THRU FIVE.

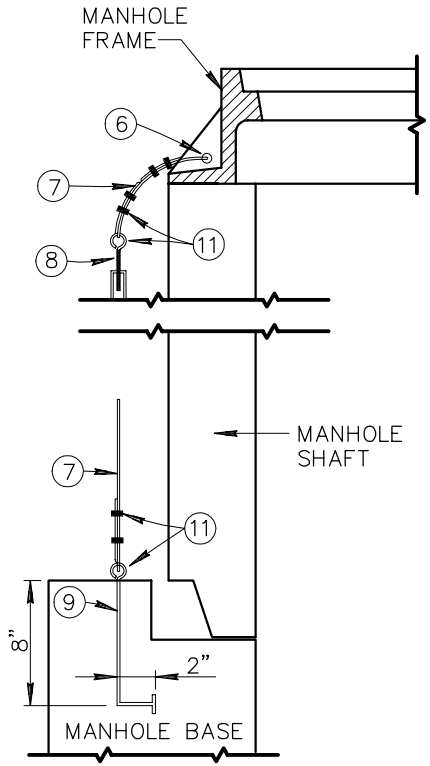

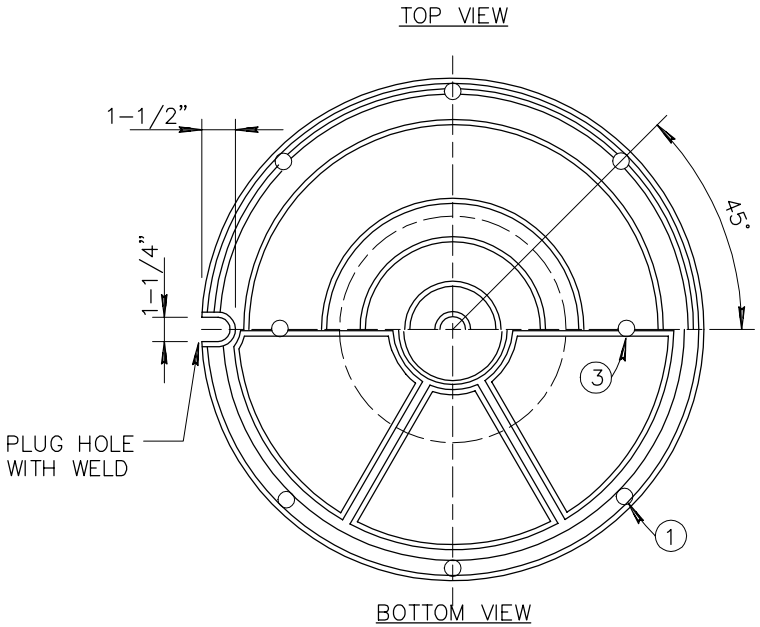

STANDARD 24" M.H. FRAME AND COVER

NOTES:

1. DRILL (8) HOLES 17/32" IN COVER FOR 1/2" CAPSCREWS, COUNTERBORE 1/2" DEEP BY 1-1/8" DIA. TO ACCOMODATE CAPSCREW AND SOCKET WRENCH. SPACE EQUALLY.
2. DRILL (8) HOLES AND TAP FOR 1/2" – 13 THREAD NATIONAL COARSE BOLT.
3. DRILL, TAP AND COUNTERBORE (2) HOLES FOR 1/2" CAPSCREWS TO BE USED FOR LIFTING COVER. PLUG WITH CAPSCREWS.
4. COVER AND FRAME MUST BE MATCHED, DRILLED AND TAPPED IN SETS.
5. CASTING DIMENSIONS GIVEN ABOVE ARE FROM DET. 424, 24" MANHOLE FRAME AND COVER.

BOTH 24" AND 30" FRAMES TO BE ANCHORED AS FOLLOWS:

6. DRILL 1/2" HOLE IN FILLET. DO NOT USE ADJACENT FILLETS.
7. 1/4" STAINLESS STEEL CABLE. SECURED WITH CABLE CLAMPS.
8. 1/2"x9" HOOK AND EYE TURNBUCKLE.
9. 1/2" EYE BOLT WITH 1" DIA. EYE.
10. INSTALL THREE CABLES PER 24" COVER (FOUR CABLES FOR 30" COVERS). EYEBOLTS TO BE SET DIRECTLY BELOW FILLETS USED.
11. TRIPLE WRAP TURNBUCKLES AND CABLE CLAMPS WITH 1" WIDE TAPE, SAFE-T-CLAD, F.O.S. 655, OR APPROVED EQUAL.

DETAIL NO.			REVISED	DETAIL NO.
523-1	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	PRESSURE MANHOLE		523-1

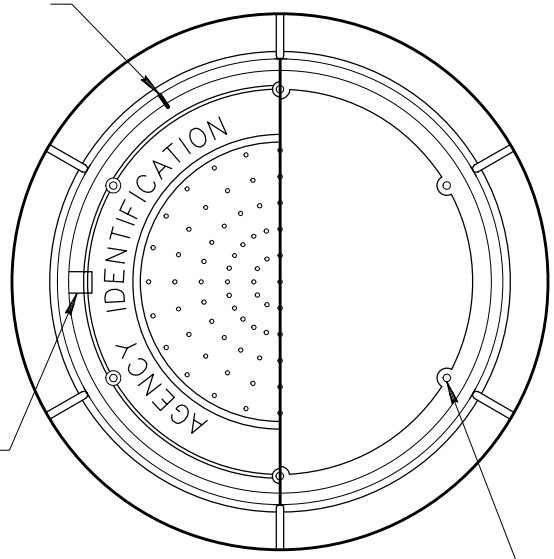

NOTES:

1. DRILL (6) HOLES IN 30" COVER (4 HOLES IN 24" COVER) 17/32" CORED RECESS FOR 1/2" CAPSCREWS. SPACE EQUALLY (304 S.S.)
2. DRILL (6) HOLES IN 30" FRAME (4 HOLES IN 24" FRAME) AND TAP FOR 1/2" – NATIONAL COARSE BOLT (HEX HEAD).
3. COVER AND FRAME MUST BE MATCH MARKED, DRILLED AND TAPPED IN SETS.
4. DIMENSIONS, LETTERING, WEIGHTS AND MATERIALS SHALL CONFORM TO DET. 424.
5. REFER TO DETAIL 523–1 FOR INSTALLATION PROCEDURES.



BOLT HOLE DETAIL



PICKHOLE DETAIL

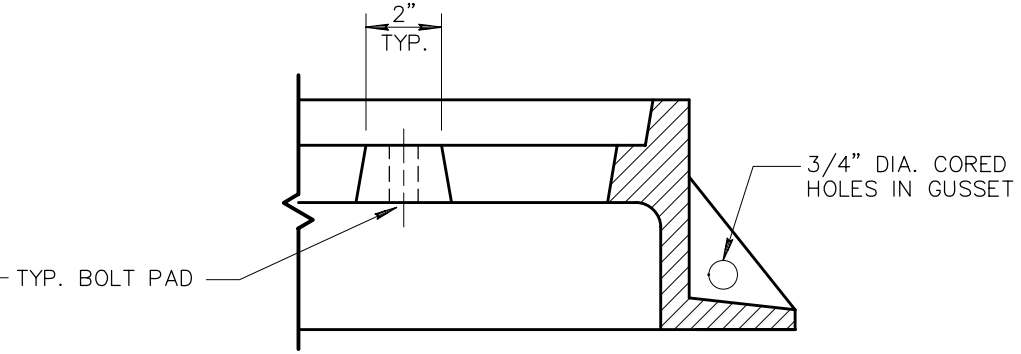

COVER SECTION

FRAME SECTION

DETAIL NO.			REVISED	DETAIL NO.
523–2	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	PRESSURE MANHOLE		523–2

TOP VIEW

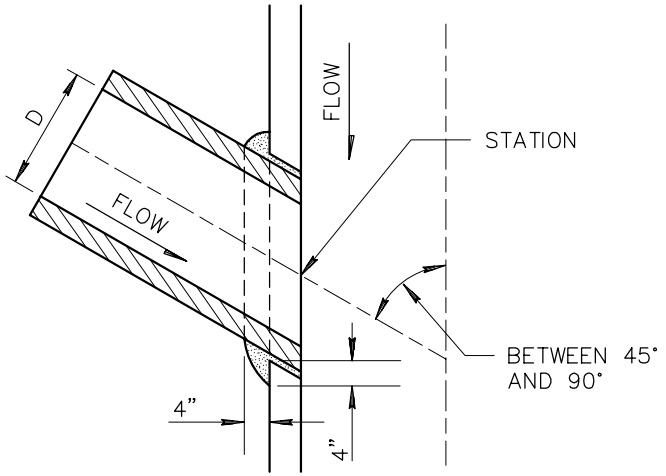

SECTION A–A

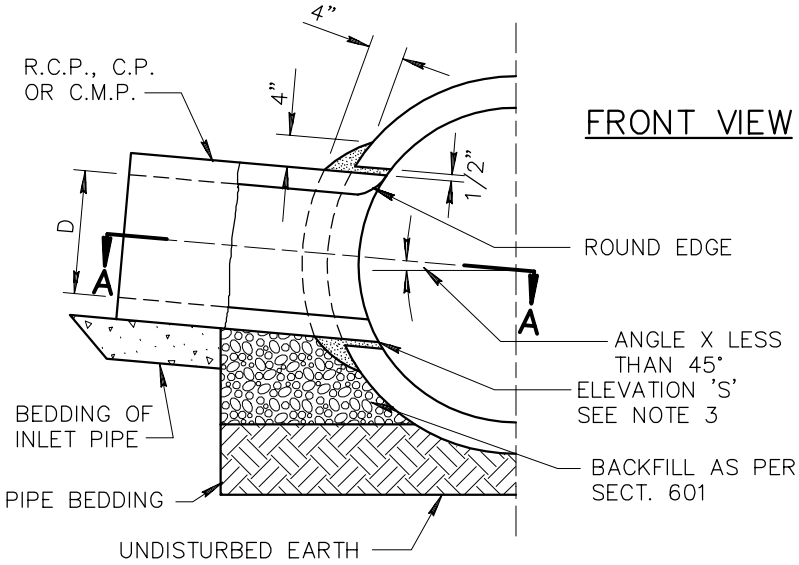

FRONT VIEW

SIDE INLET TYPE 1

FRONT VIEW

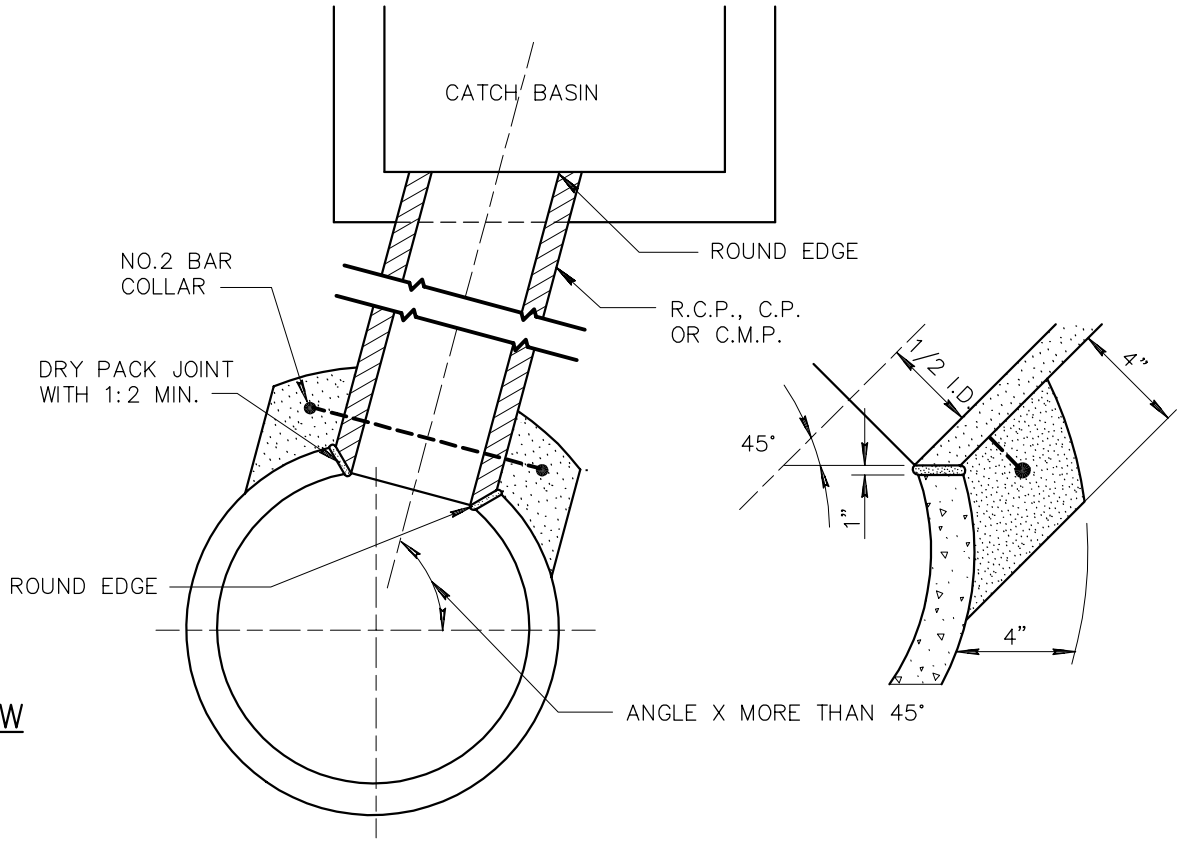

CATCH BASIN ABOVE STORM DRAIN TYPE 2

NOTES:

1. D SHALL BE 24" OR LESS. FOR LARGER VALUE OF D USE MANHOLE OR JUNCTION STRUCTURE.
2. IN NO CASE SHALL THE OUTSIDE DIAMETER OF THE INLET EXCEED ONE HALF THE INSIDE DIAMETER OF THE MAIN STORM DRAIN.
3. CENTERLINE OF INLET SHALL BE ON RADIUS OF MAIN STORM DRAIN EXCEPT WHEN ELEVATION S IS SHOWN ON PLANS.
4. THE MINIMUM OPENING INTO THE STORM DRAIN SHALL BE THE OUTSIDE DIAMETER OF THE CONNECTING PIPE PLUS 1".
5. IF ANGLE X FROM HORIZONTAL IS 45° OR LESS USE TYPE 1. IF ANGLE X IS 45° OR OVER USE TYPE 2.

DETAIL NO.			REVISED	DETAIL NO.
524	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**STORM DRAIN LATERAL PIPE CONNECTIONS**		524

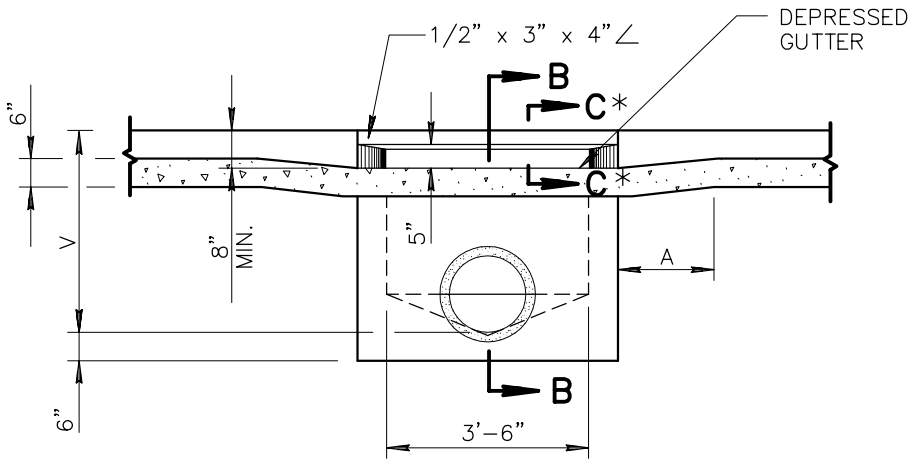

SECTION A–A

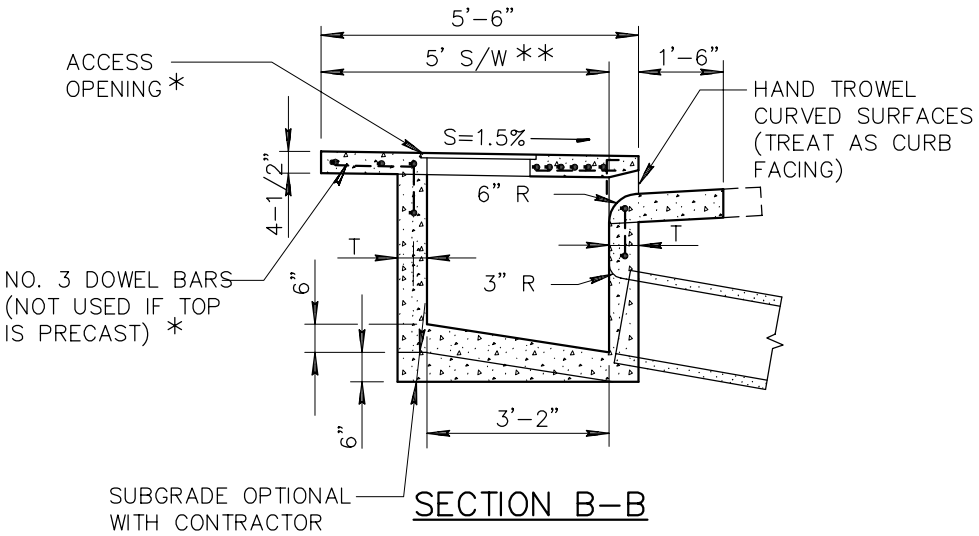

SECTION B–B

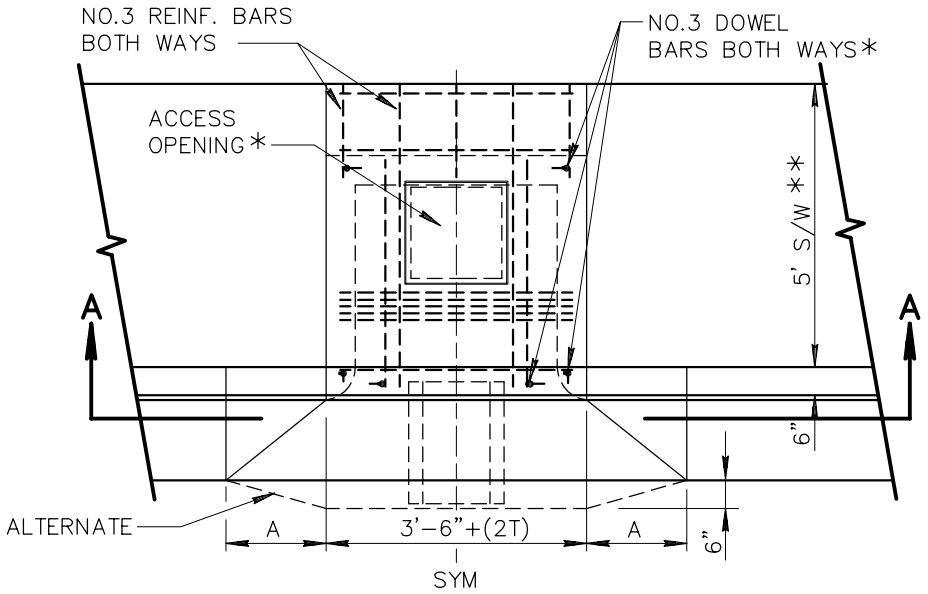

PLAN VIEW

NOTES:

1. THE ENTIRE CATCH BASIN COVER MAY BE POURED IN PLACE OR PRECAST.
2. CONNECTION PIPES MAY BE PLACED IN ANY POSITION AROUND THE WALLS PROVIDED THE POSITION IS CONSISTENT WITH THE PLAN.
3. OUTLET PIPE SHALL BE TRIMMED TO FINAL SHAPE AND LENGTH BEFORE CONCRETE IS POURED.
4. FLOOR OF BASIN SHALL BE TROWELLED TO A HARD SMOOTH SURFACE AND SHALL SLOPE FROM ALL DIRECTIONS TO OUTLET.
5. ALL STRUCTURAL STEEL TO BE PAINTED ONE SHOP COAT OF NO. 1 D PAINT AND TWO FIELD COATS OF NO. 10 PAINT AS PER SECT. 790.
6. CONCRETE SHALL BE CLASS A PER SECTION 725.

CURB	A
4"	3'-3"
6"	1'-9"
7"	1'-0"

DIMENSIONS

T=6" IF V=4' OR LESS
T=8" IF V IS BETWEEN 4' AND 8'
T=10" IF V IS 8' OR MORE (IF V EXCEEDS 10' SPECIAL DESIGN IS REQUIRED)
V=3'-6" UNLESS OTHERWISE SPECIFIED.

* SEE DETAILS 536-1 AND 536-2 FOR DETAILS AND SECTIONS COMMON TO ALL CURB OPENING CATCH BASINS.
** 4' LOCATIONS WHERE 4' S/W IS REQUIRED.

DETAIL NO.			REVISED	DETAIL NO.
530	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	3'-6" CURB OPENING CATCH BASIN - TYPE 'A'		530

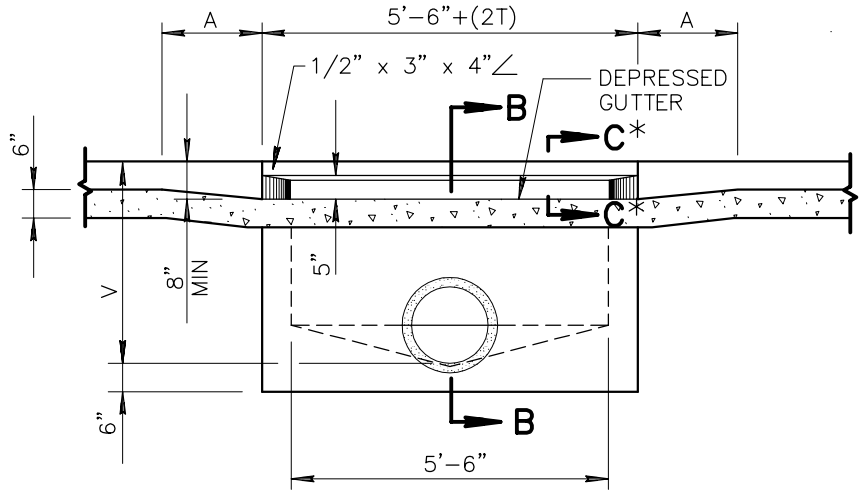

SECTION A-A

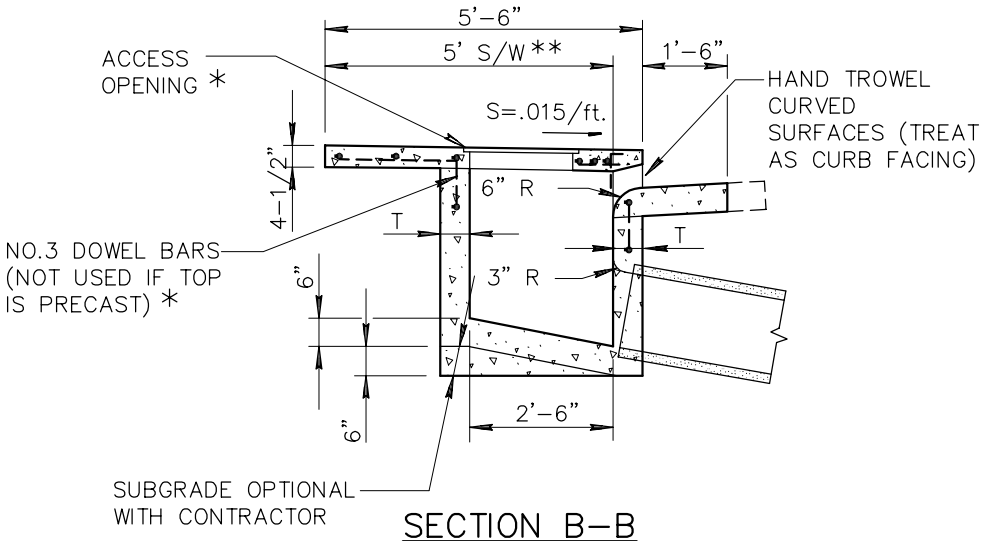

SECTION B-B

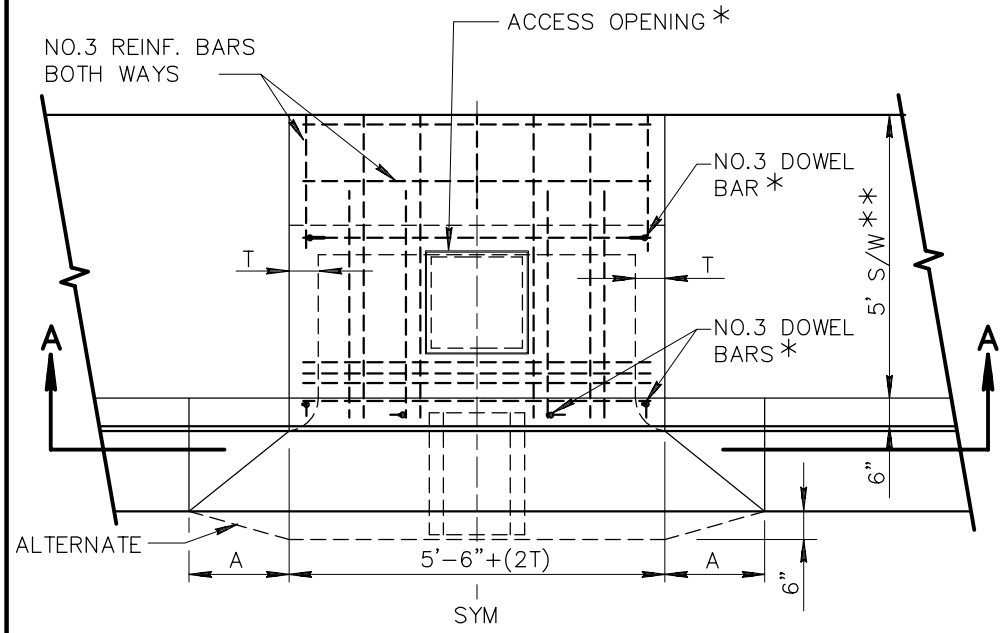

PLAN VIEW

NOTES:

1. THE ENTIRE CATCH BASIN COVER MAY BE POURED IN PLACE OR PRECAST.
2. CONNECTION PIPES MAY BE PLACED IN ANY POSITION AROUND THE WALLS PROVIDED THE POSITION IS CONSISTENT WITH THE PLAN.
3. OUTLET PIPE SHALL BE TRIMMED TO FINAL SHAPE AND LENGTH BEFORE CONCRETE IS POURED.
4. FLOOR OF BASIN SHALL BE TROWELLED TO A HARD SMOOTH SURFACE AND SHALL SLOPE FROM ALL DIRECTIONS TO OUTLET.
5. ALL STRUCTURAL STEEL TO BE PAINTED ONE SHOP COAT OF NO. 1 D PAINT AND TWO FIELD COATS OF NO. 10 PAINT AS PER SECT. 790.
6. CONCRETE SHALL BE CLASS A PER SECTION 725.

CURB	A
4"	3'-3"
6"	1'-9"
7"	1'-0"

DIMENSIONS

T=6" IF V=4' OR LESS
T=8" IF V IS BETWEEN 4' AND 8'
T=10" IF V IS 8' OR MORE (IF V EXCEEDS 10' SPECIAL DESIGN IS REQUIRED)
V=3'-6" UNLESS OTHERWISE SPECIFIED.

* SEE DETAILS 536-1 AND 536-2 FOR DETAILS AND SECTIONS COMMON TO ALL CURB OPENING CATCH BASINS.
** 4' LOCATIONS WHERE 4' S/W IS REQUIRED.

DETAIL NO.			REVISED	DETAIL NO.
531	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	5'-6" CURB OPENING CATCH BASIN - TYPE 'B'		531

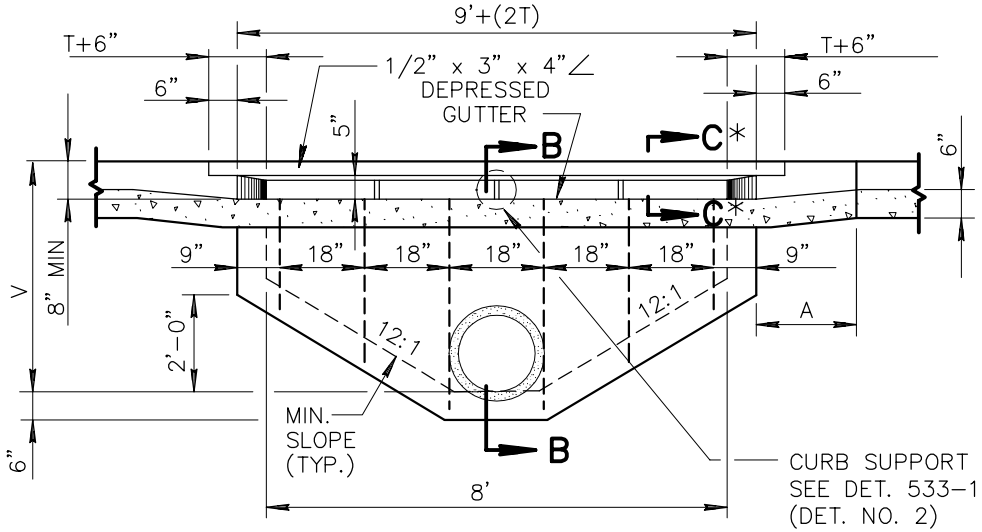

SECTION A–A

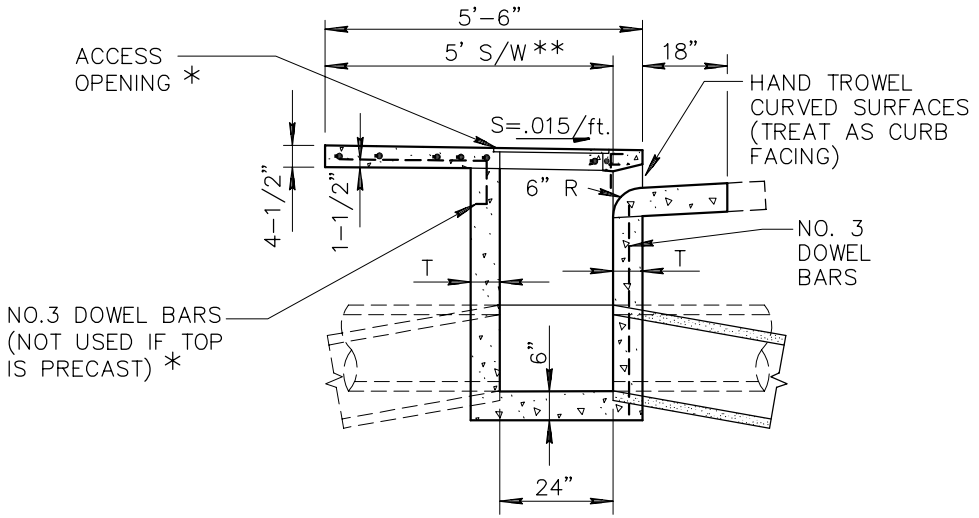

SECTION B–B

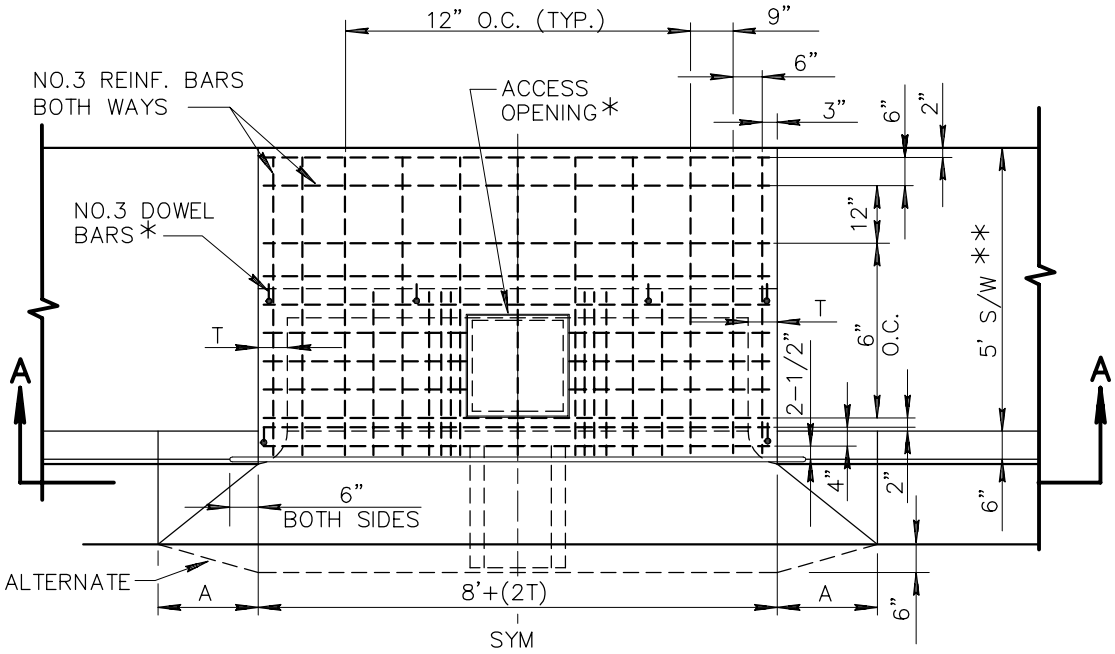

PLAN VIEW

NOTES:

1. THE ENTIRE CATCH BASIN COVER MAY BE POURED IN PLACE OR PRECAST.
2. CONNECTION PIPES MAY BE PLACED IN ANY POSITION AROUND THE WALLS PROVIDED THE POSITION IS CONSISTENT WITH THE PLAN.
3. OUTLET PIPE SHALL BE TRIMMED TO FINAL SHAPE AND LENGTH BEFORE CONCRETE IS POURED.
4. FLOOR OF BASIN SHALL BE TROWELLED TO A HARD SMOOTH SURFACE AND SHALL SLOPE FROM ALL DIRECTIONS TO OUTLET.
5. ALL STRUCTURAL STEEL TO BE PAINTED ONE SHOP COAT OF NO.1 D PAINT AND TWO FIELD COATS OF NO. 10 PAINT AS PER SECT. 790.
6. CONCRETE SHALL BE CLASS A PER SECTION 725.

CURB	A
4"	3'-3"
6"	1'-9"
7"	1'-0"

DIMENSIONS

T=6" IF V=4' OR LESS
T=8" IF V IS BETWEEN 4' AND 8'
T=10" IF V IS 8' OR MORE (IF V EXCEEDS 10' SPECIAL DESIGN IS REQUIRED)
V=4' UNLESS OTHERWISE SPECIFIED.

* SEE DETAILS 536-1 AND 536-2 FOR DETAILS AND SECTIONS COMMON TO ALL CURB OPENING CATCH BASINS.
** 4' LOCATIONS WHERE 4' S/W IS REQUIRED.

DETAIL NO.			REVISED	DETAIL NO.
532	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	8'-0" CURB OPENING CATCH BASIN - TYPE 'C'		532

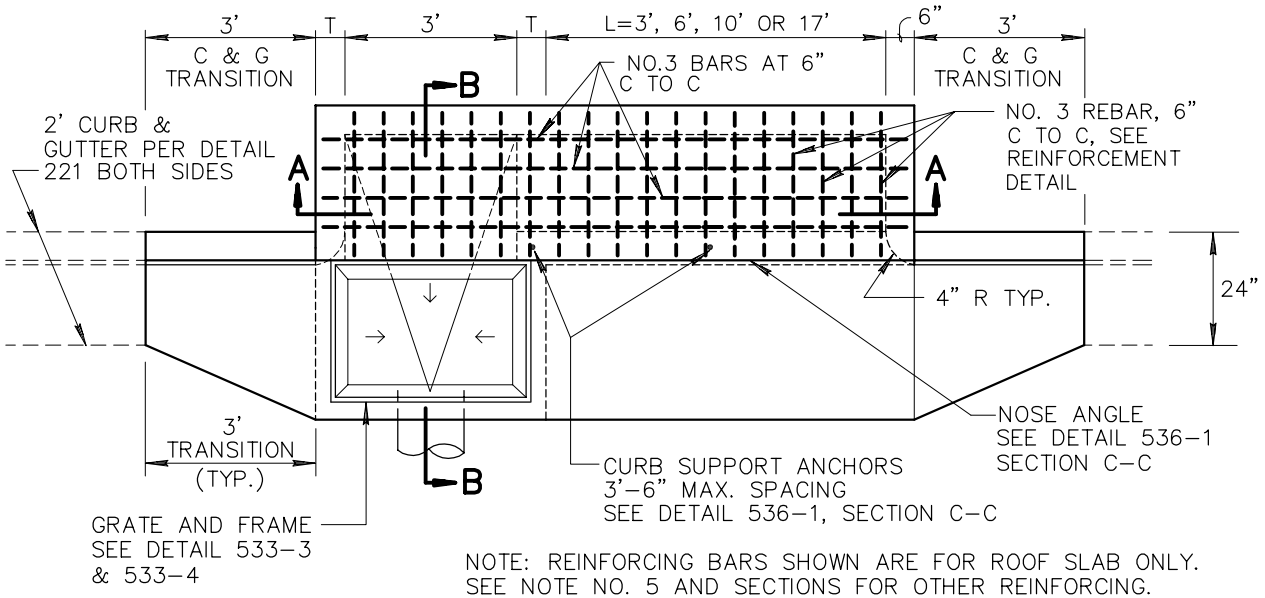

NOTE: REINFORCING BARS SHOWN ARE FOR ROOF SLAB ONLY. SEE NOTE NO. 5 AND SECTIONS FOR OTHER REINFORCING.

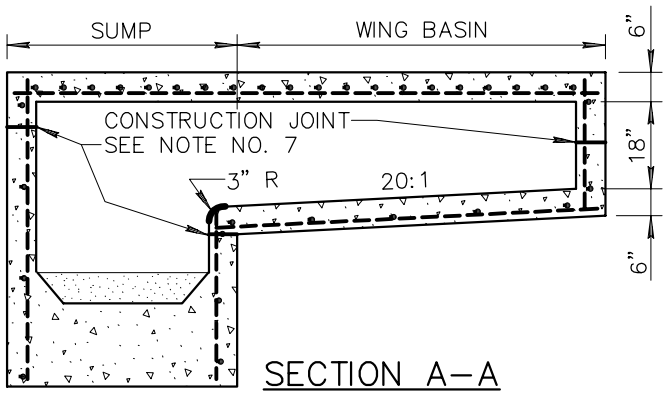

SECTION A-A

NOTES:

1. SINGLE C.B. (ILLUSTRATED), SUMP WITH WING BASIN UPSTREAM.
2. DOUBLE C.B. SUMP WITH SYMMETRICAL WING BASINS EACH SIDE.
3. PIPES CAN BE PLACED IN ANY WALL EXCEPT WALL ADJACENT TO A WING BASIN. PIPE SHALL BE TRIMMED TO FINAL SHAPE AND LENGTH BEFORE CONCRETE IS PLACED.
4. SUMP FLOOR SHALL HAVE A WOOD TROWEL FINISH AND A MIN. SLOPE OF 4:1 IN ALL DIRECTIONS TOWARD OUTLET PIPE.
5. ALL REFORCING BARS SHALL BE NO.4 18" C TO C BOTH WAYS AND 1-1/2" CLEAR TO INSIDE OF WALLS AND OUTSIDE WING BASIN FLOOR EXCEPT AS SHOWN. SEE SECT. 727.
6. ALL CONCRETE SHALL BE CLASS 'A', PER SECT. 725.
7. CONSTRUCTION JOINTS SHALL BE PLACED TO MEET FIELD CONDITIONS.
8. ALL EXPOSED STEEL SHALL BE GALVANIZED OR PAINTED WITH ONE SHOP COAT OF #1 PAINT AND TWO FIELD COATS OF #10 PAINT.

PLAN VIEW

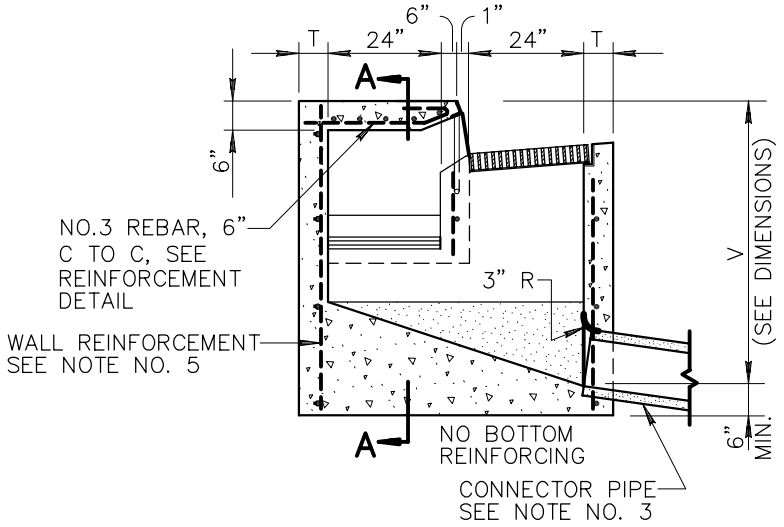

SECTION B-B

DIMENSIONS

V = 3'-3" MIN. WHEN L = 3'
V = 3'-5" MIN. WHEN L = 6'
V = 3'-7" MIN. WHEN L = 10'
V = 4'-0" MIN. WHEN L = 17'
T = 6" WHEN V IS LESS THAN 8'
T = 8" WHEN V IS EQUAL TO OR GREATER THAN 8'
H = CURB HEIGHT PRIOR TO THE TRANSITION

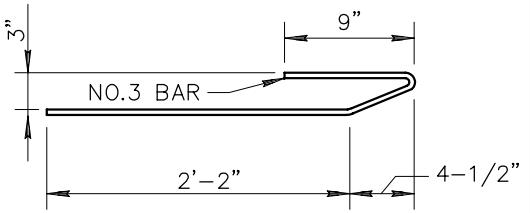

REINFORCEMENT DETAIL

DETAIL NO.		STANDARD DETAIL		REVISED	DETAIL NO.
533-1	MARICOPA ASSOCIATION of GOVERNMENTS	ENGLISH	CATCH BASIN TYPE 'D		533-1

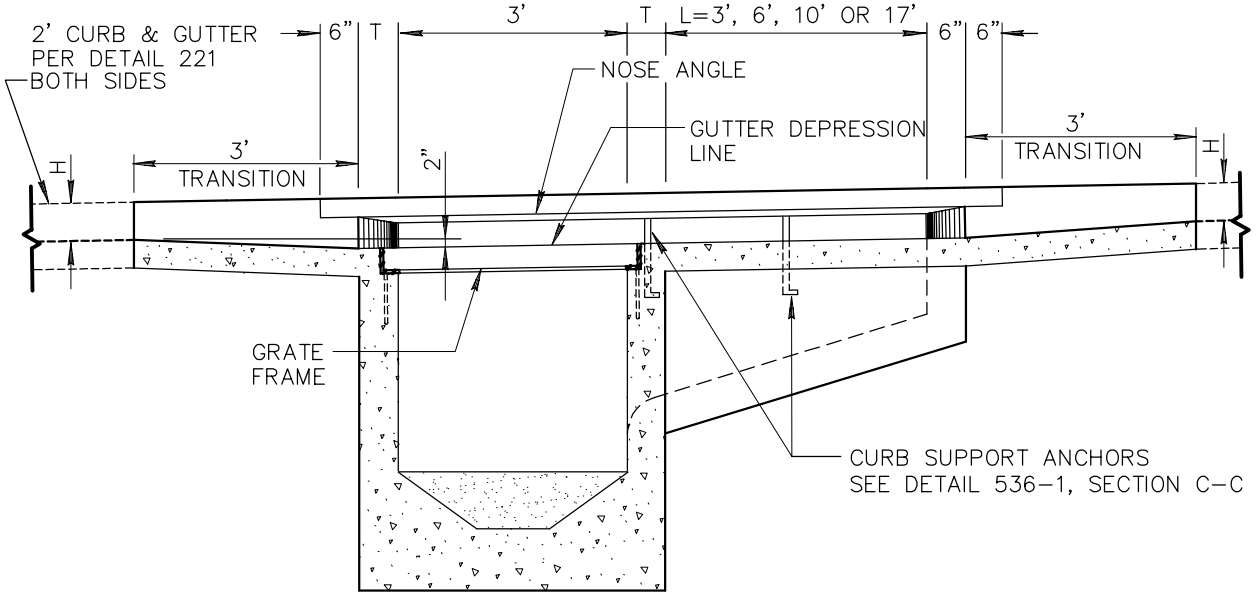

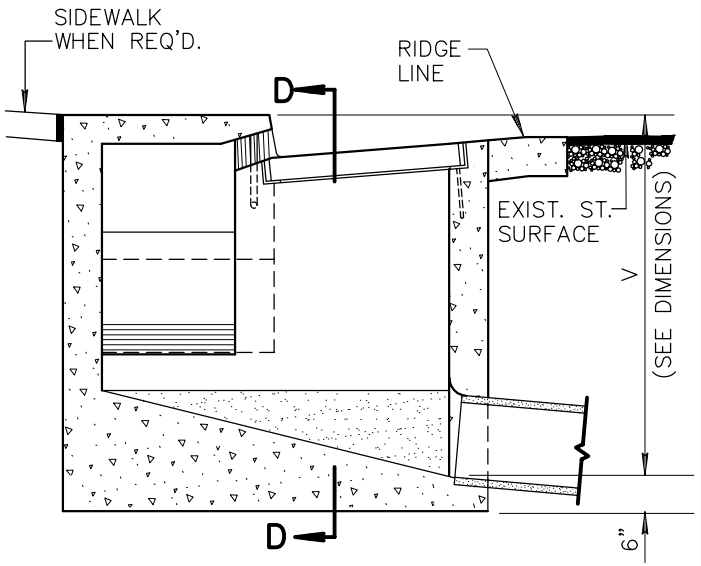

SECTION E-E

FOR S/W INSTALLATION
BEHIND CATCH BASIN
SEE DETAIL 230

SECTION D-D

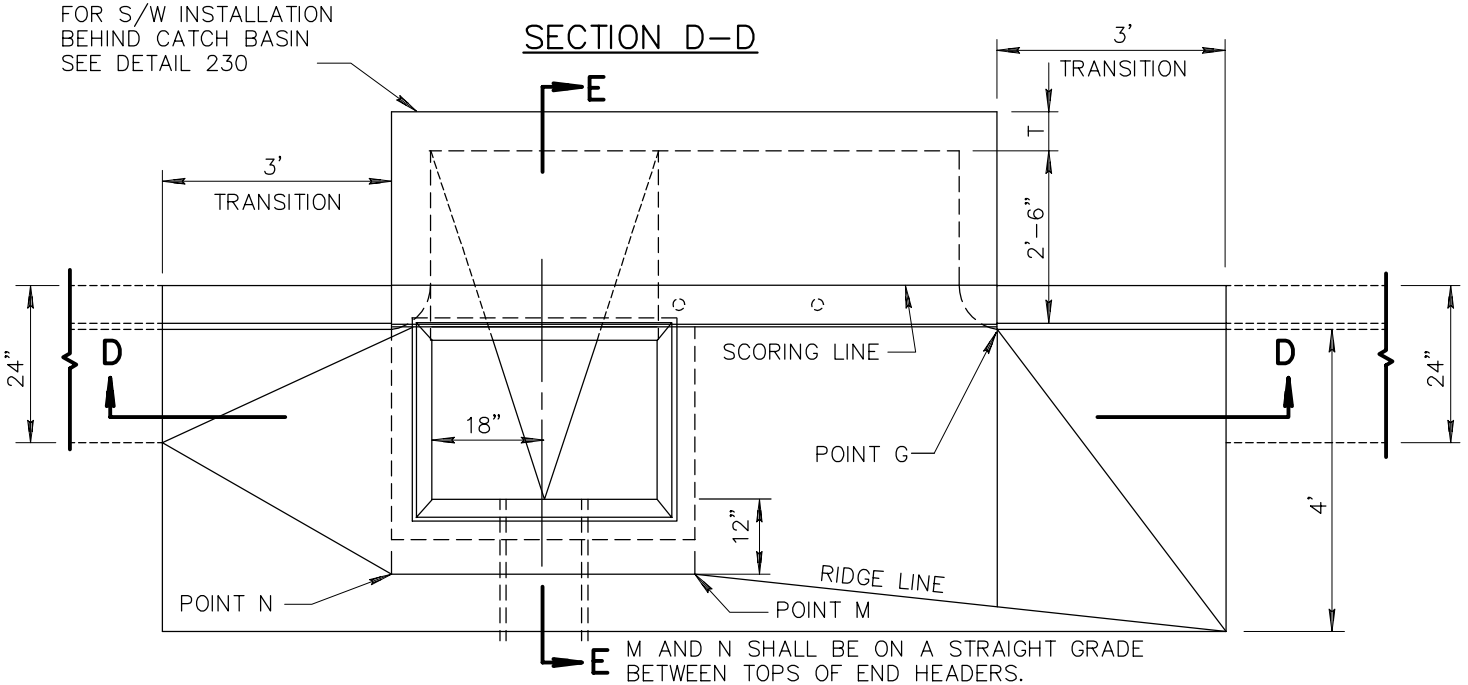

PLAN VIEW

APRON NOTES:

9. APRON IS CONSTRUCTED ONLY WHEN SPECIFIED ON PLANS.
10. CONCRETE IN APRON SHALL BE NOT LESS THAN 8" THICK.
11. CURB FACES AT CATCH BASIN OPENING AND POINT G SHALL BE THAT OF THE EXISTING CURB FACE PLUS 2" OR AS OTHERWISE SHOWN.
12. ELEVATION AT THE OUTER CORNERS OF THE LOCAL DEPRESSION SHOWN ON THE PLANS ARE FOR THE FINISHED SURFACE.
13. SEE DETAIL 533-1 FOR ADDITIONAL DIMENSIONS, REBAR PLACEMENT AND OTHER INFORMATION TO CONSTRUCT CATCH BASIN.

DETAIL NO.				REVISED	DETAIL NO.
533-2	MARICOPA ASSOCIATION of GOVERNMENTS	STANDARD DETAIL ENGLISH	APRON FOR TYPE 'D' CATCH BASIN		533-2

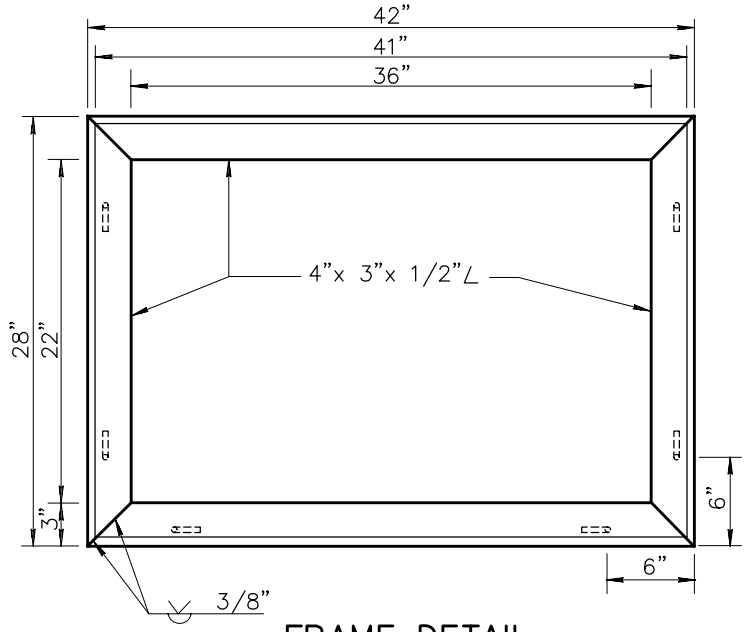

FRAME DETAIL

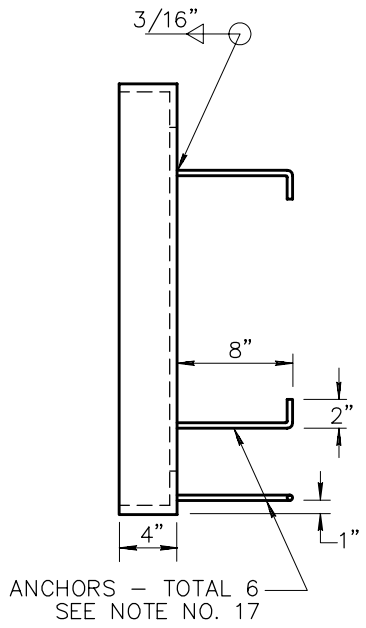

ANCHORS – TOTAL 6
SEE NOTE NO. 17

FRAME AND GRATE NOTES

14. FRAME AND GRATING SHALL BE TESTED FOR ACCURACY OF FIT AND SHALL BE MARKED IN SETS BEFORE DELIVERY.
15. ALL WELDING SHALL BE IN ACCORDANCE WITH STANDARD WELDING SPECIFICATIONS.
16. CROSS BARS AND END BARS MAY BE FILLET WELDED, RESISTANCE WELDED OR ELECTOR FORGED TO BEARING BARS.
17. ANCHORS SHALL BE 3/8" DIA. STEEL ROD, NO. 3 REBAR, 3/8" DIA. x 8" BOLTS OR 8" NELSON STUDS.
18. ALL PARTS SHALL BE OF STRUCTURAL GRADE STEEL.
19. ALL EXPOSED STEEL SHALL BE GALVANIZED OR PAINTED WITH ONE COAT #1 PAINT AND TWO FIELD COATS OF #10 PAINT.

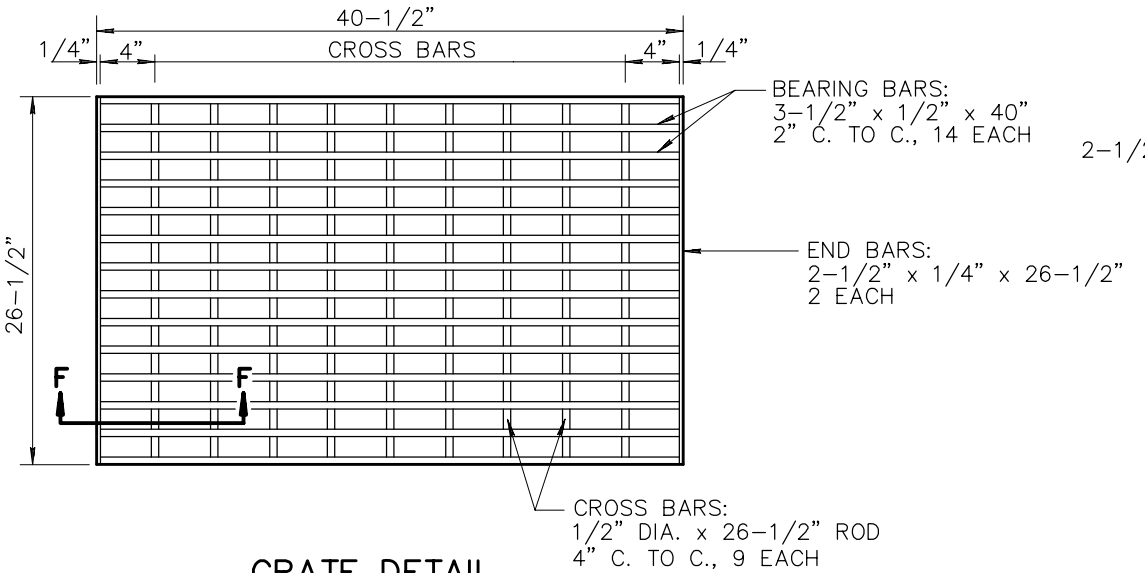

GRATE DETAIL

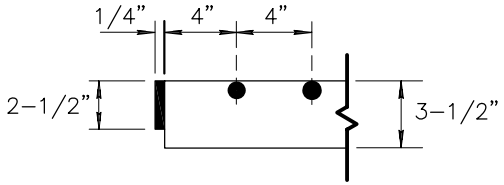

SECTION F–F

DETAIL NO.				REVISED	DETAIL NO.
533–3	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	FRAME AND GRATE FOR TYPE 'D' CATCH BASIN		01–01–2007	533–3

This Page Is Reserved for Future Use.

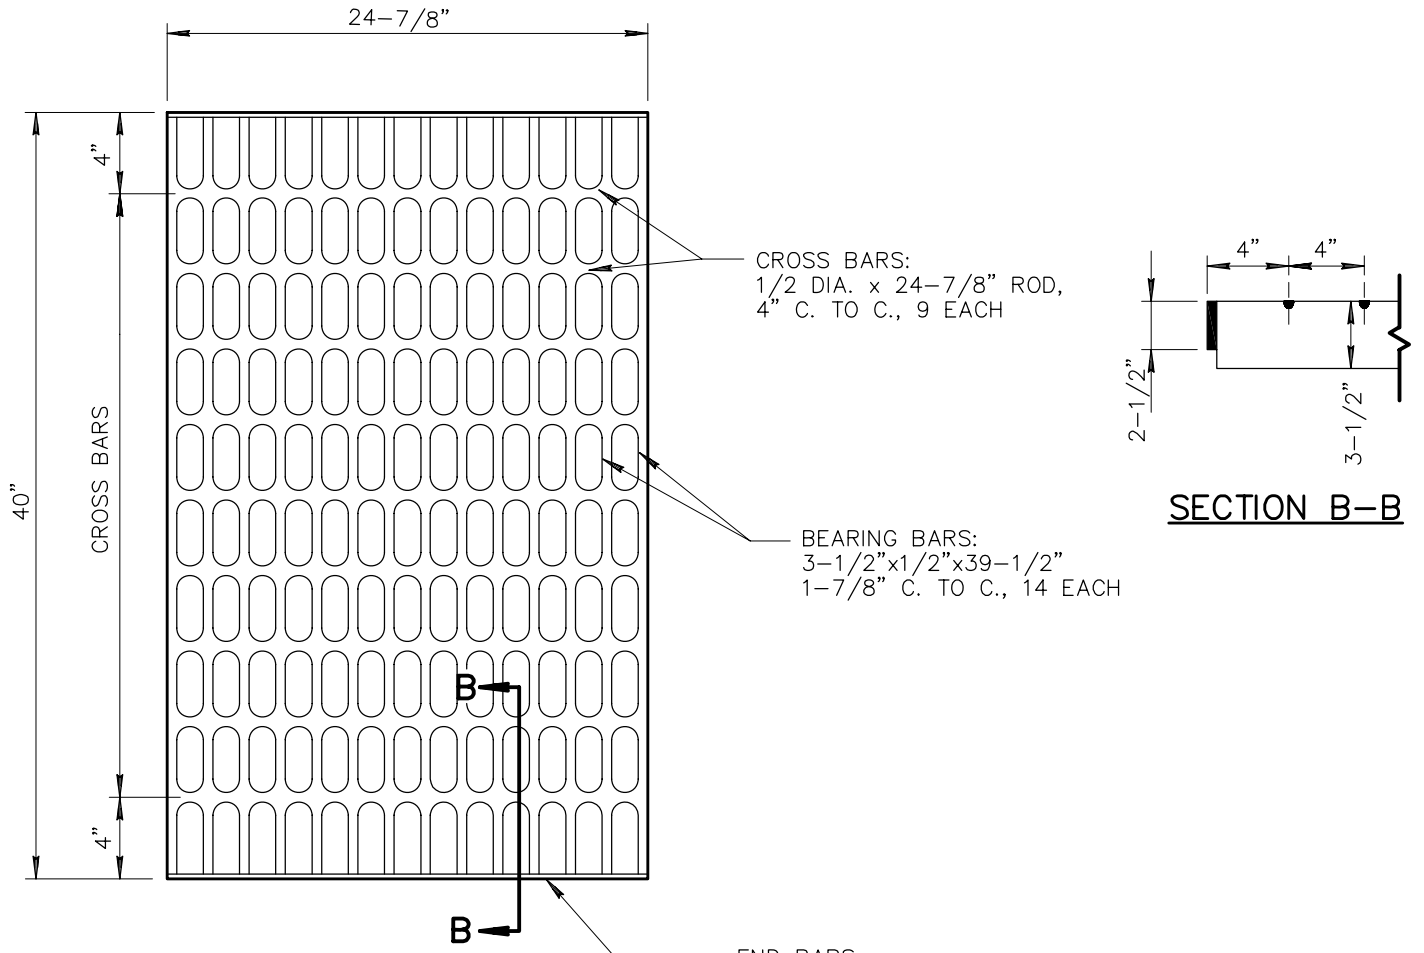

SECTION B–B

GRATE DETAIL

GRATE OPENING: 4.344 SQ. FT.

DETAIL NO.		STANDARD DETAIL	7'–0" CURB OPENING CATCH BASIN TYPE 'D' – GRATE DETAILS	REVISED	DETAIL NO.
533–4	MARICOPA ASSOCIATION of GOVERNMENTS	ENGLISH		01–01–2007	533–4

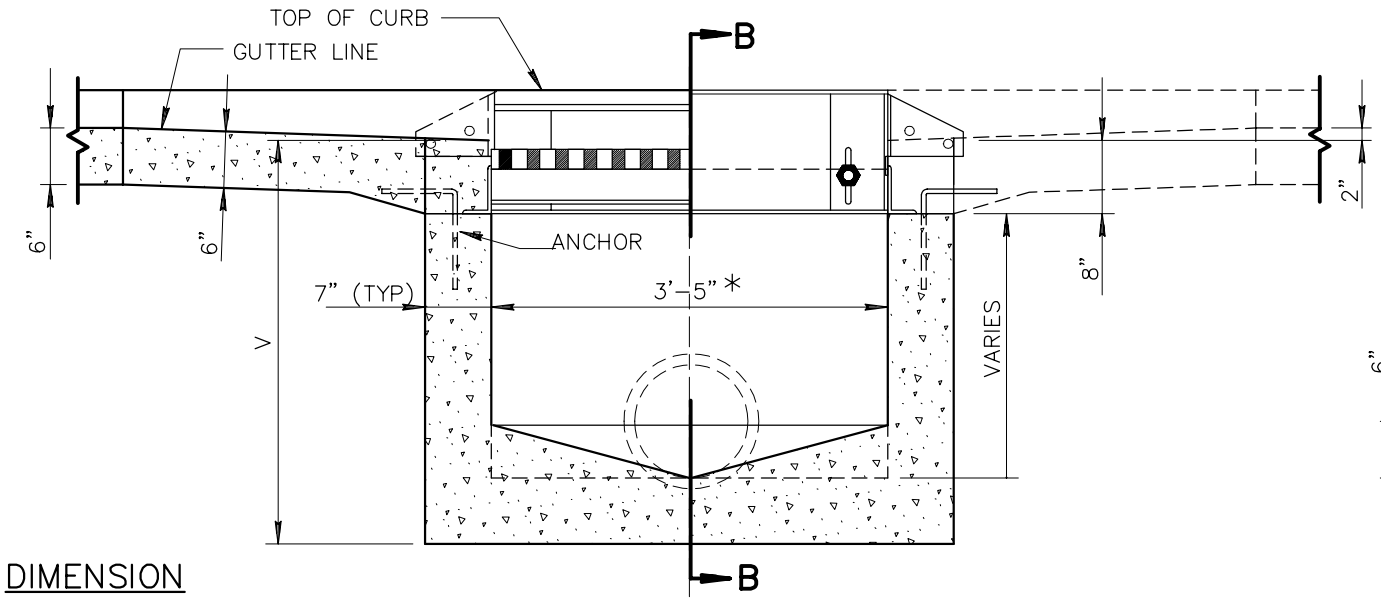

SECTION A-A

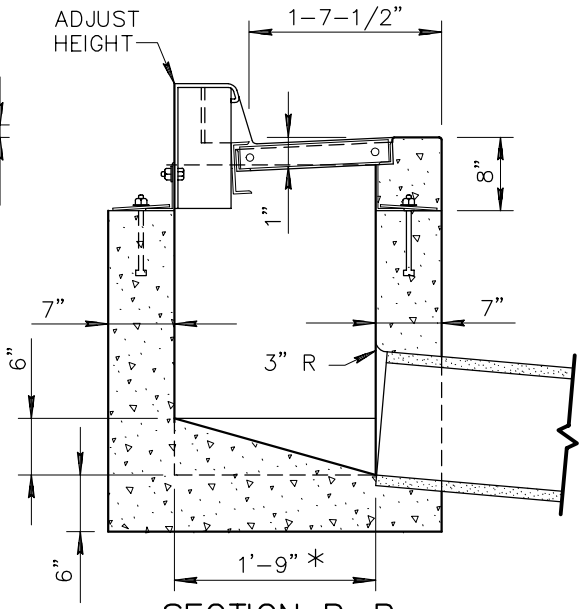

SECTION B-B

DIMENSION

V=3'-0" UNLESS OTHERWISE SPECIFIED.
* DIMENSIONAL CHANGE WITH DETAIL 534-3 AND DETAIL 534-4.

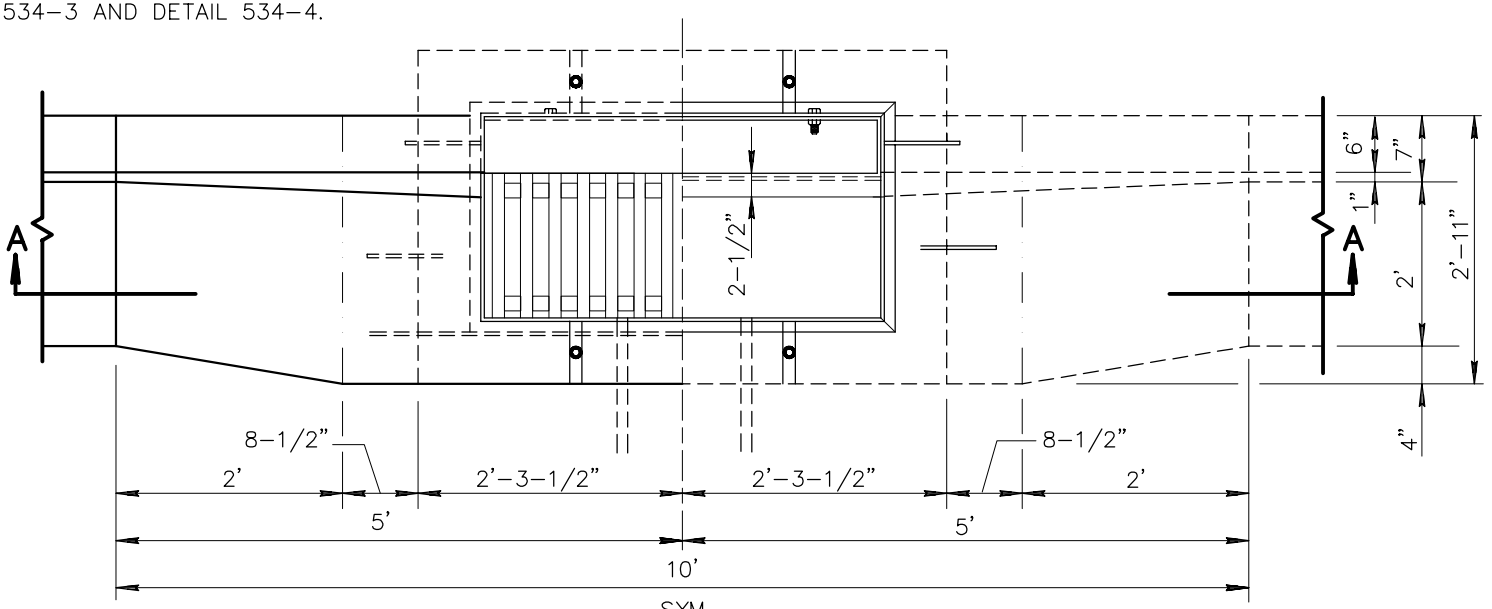

HALF PLAN GUTTER & GRATE

HALF PLAN FRAME & ANCHORS

NOTES:

1. ADJUSTABLE CURB, FRAME AND GRATING UNITS SHALL BE STRUCTURAL STEEL OR CAST IRON
2. PIPES MAY ENTER OR LEAVE ANY WALL. BOTTOM OF BOX TO BE SLOPED TO OUTLET PIPE FROM ALL DIRECTIONS AND TROWELLED TO A HARD SMOOTH SURFACE.
3. CONNECTION PIPES MAY BE PLACED IN ANY POSITION AROUND THE WALLS PROVIDED THE POSITION IS CONSISTENT WITH THE PLAN.
4. OUTLET PIPE SHALL BE TRIMMED TO FINAL SHAPE AND LENGTH BEFORE CONCRETE IS POURED.
5. ALL STRUCTURAL STEEL TO BE PAINTED ONE SHOP COAT OF NO. 1 PAINT AND TWO FIELD COATS OF NO. 10 PAINT AS PER SECT. 790.
6. ALL CONCRETE, CLASS 'A' AS PER SECTION 725.

DETAIL NO.			REVISED	DETAIL NO.
534-1	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CATCH BASIN TYPE 'E'		534-1

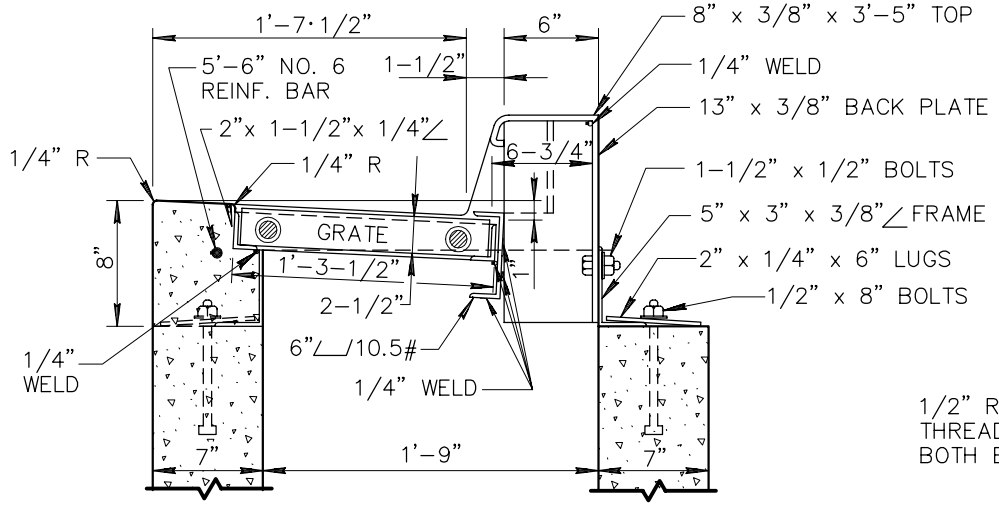

CROSS SECTION

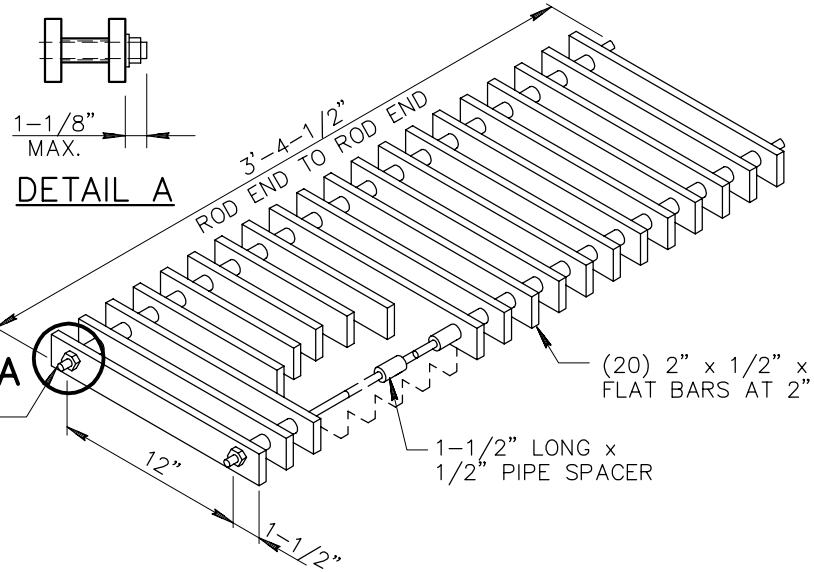

DETAIL A

GRATE

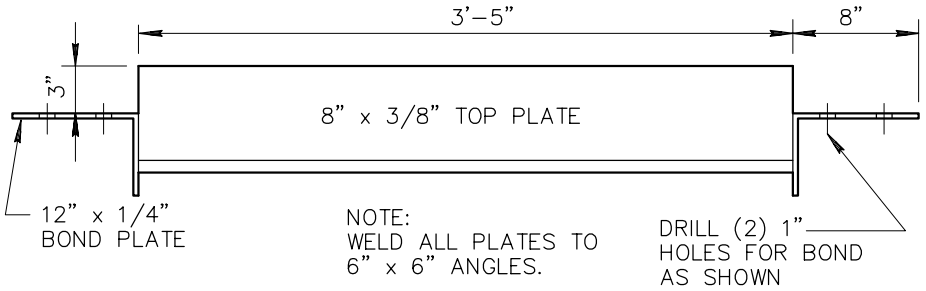

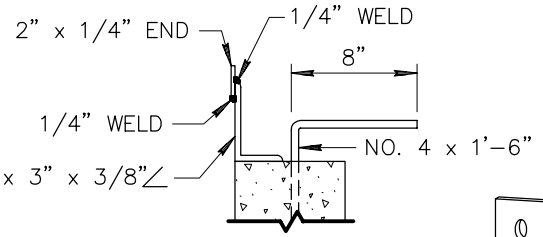

ANCHOR

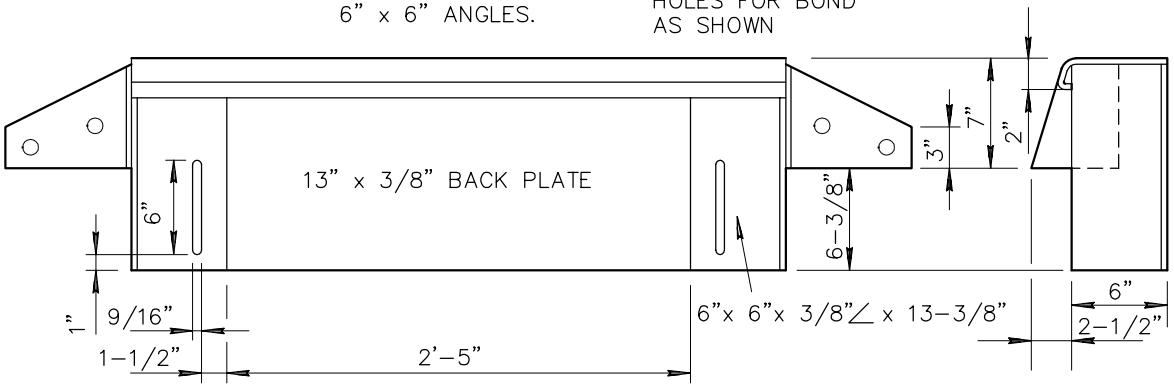

ADJUSTABLE CURB

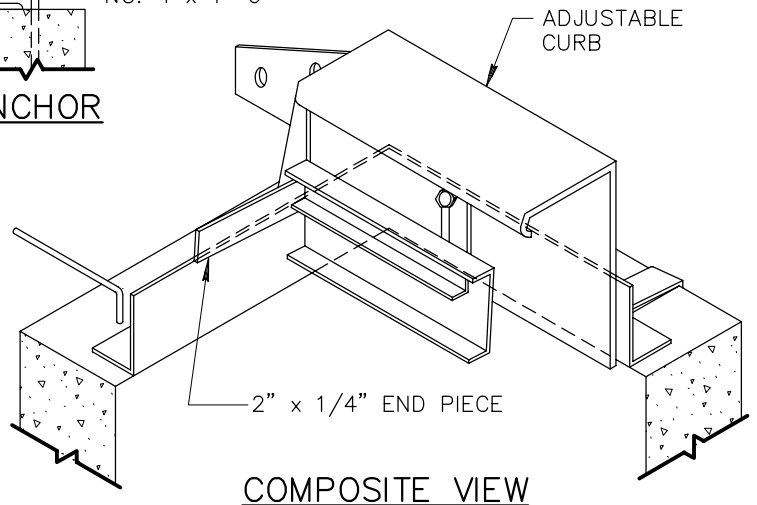

COMPOSITE VIEW

DETAIL NO.			REVISED	DETAIL NO.
534-2	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CATCH BASIN TYPE 'E' (DETAILS)		534-2

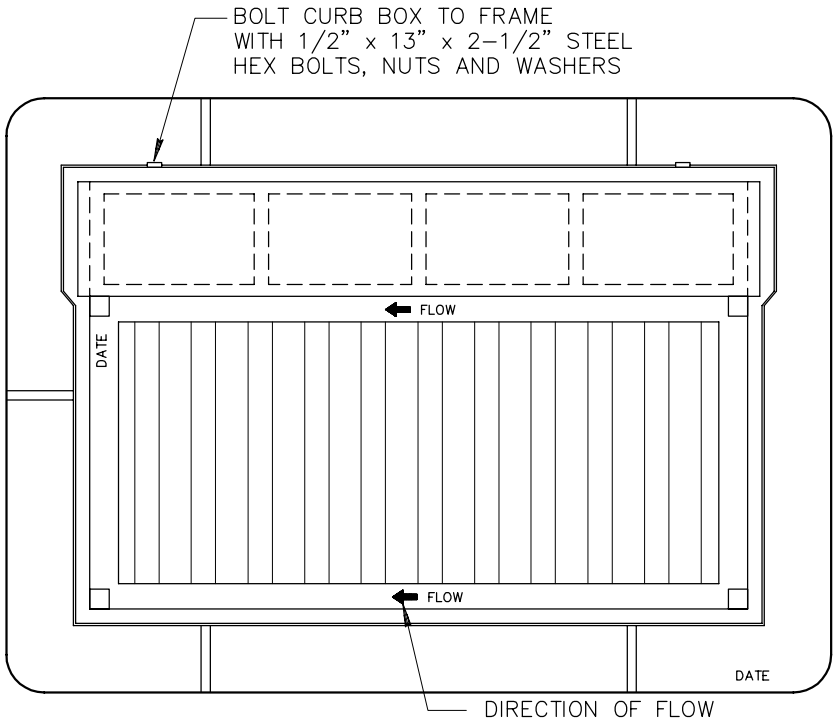

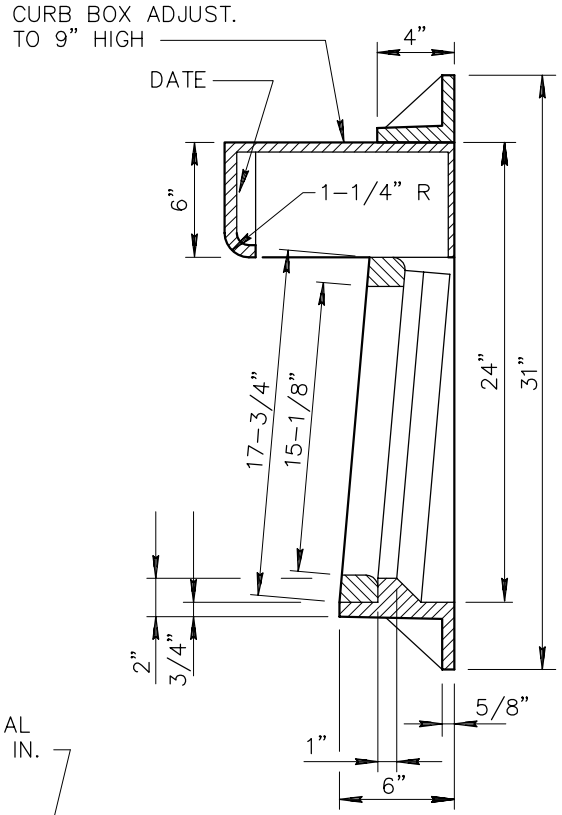

SECTION B-B

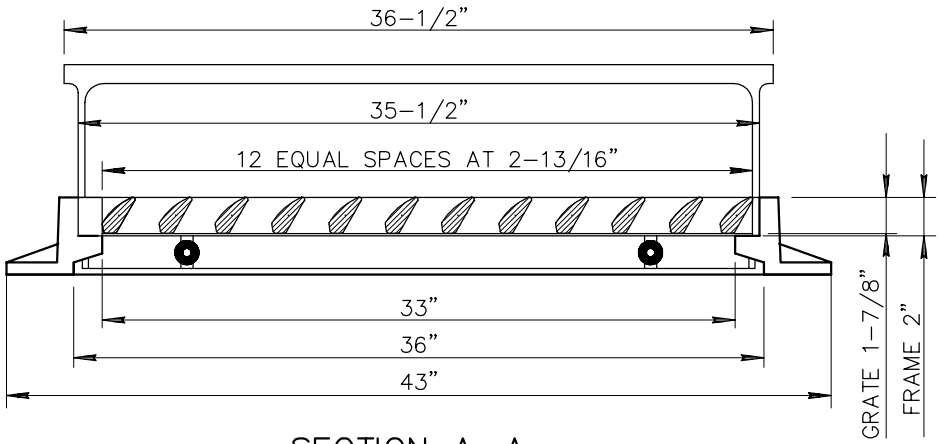

SECTION A-A



VANE DETAIL

CAST IRON FRAME - GRATE - CURB BOX

NOTE:

DIMENSIONAL CHANGE REQUIRED FROM 3'-5"
WIDTH TO 3'-0" AND 1'-9" DEPTH TO 2'-0"
MATERIAL CAST GRAY IRON ASTM A-48-83 CLASS 35B.
FRAME WEIGHT 209 LBS; GRATE 140 LBS; CURB BOX 92 LBS.

DETAIL NO.			REVISED	DETAIL NO.
534-3	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CATCH BASIN TYPE 'E' (DETAILS)		534-3

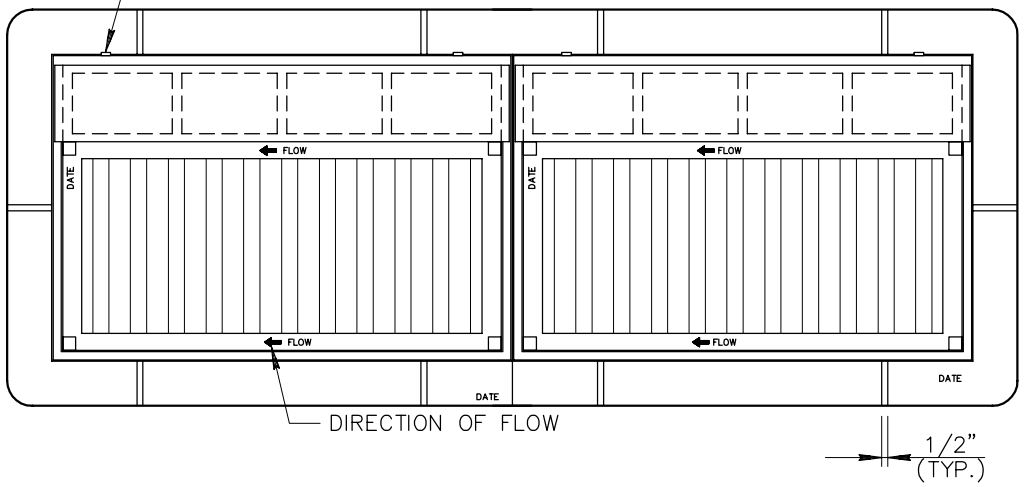

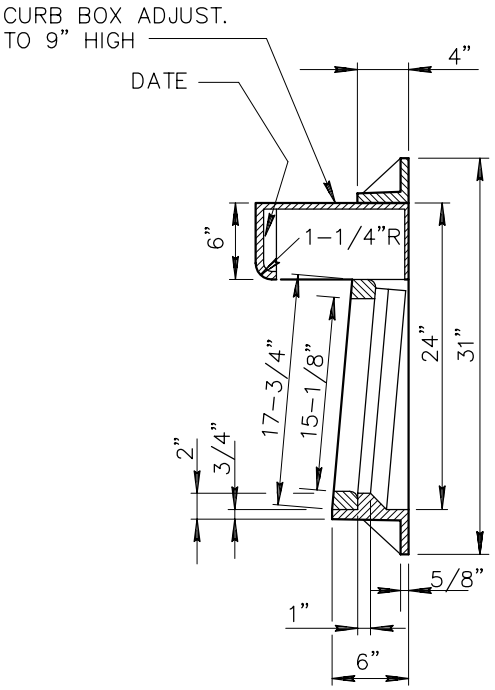

SECTION B–B

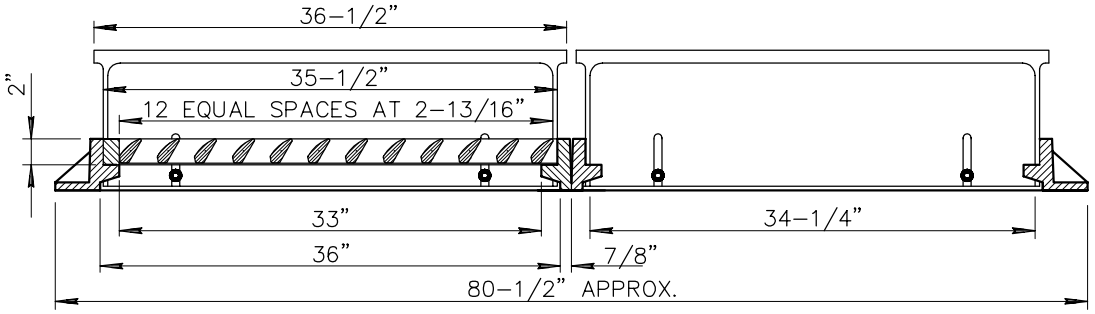

SECTION A–A



VANE DETAIL

DOUBLE UNIT CAST IRON FRAME – GRATE – CURB BOX

NOTE:

DIMENSIONAL CHANGE REQUIRED FROM 3'–5" WIDTH TO 6'–2", AND 1'–9" DEPTH TO 2'–0" REQUIRES ONE CENTER STEEL I–BEAM 4" x 7.7 LBS.
MATERIAL CAST GRAY IRON ASTM A–48–83 CLASS 35B.
FRAME WEIGHT 197 LBS.; GRATE 140 LBS.; CURB BOX 92 LBS.

DETAIL NO.			REVISED	DETAIL NO.
534-4	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CATCH BASIN TYPE 'E' (DETAILS)		534-4

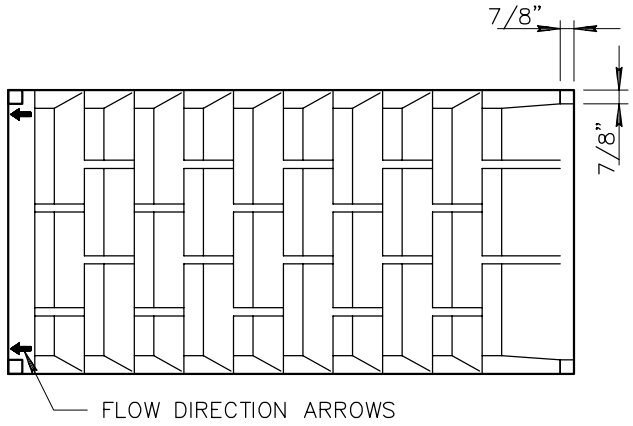

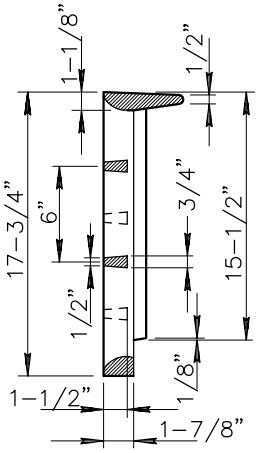

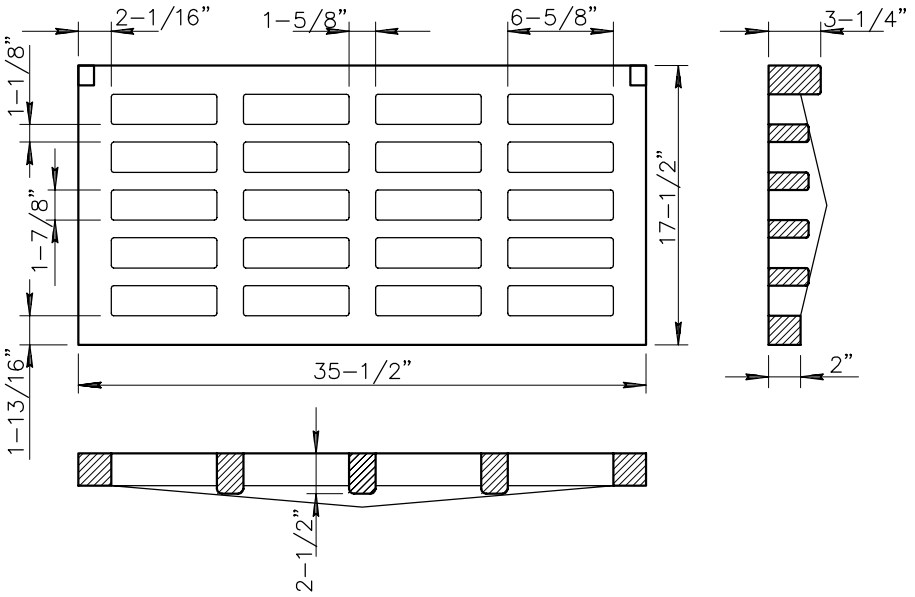

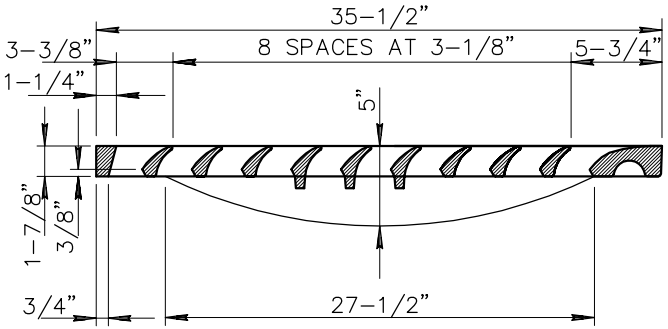



NOTCH DETAIL

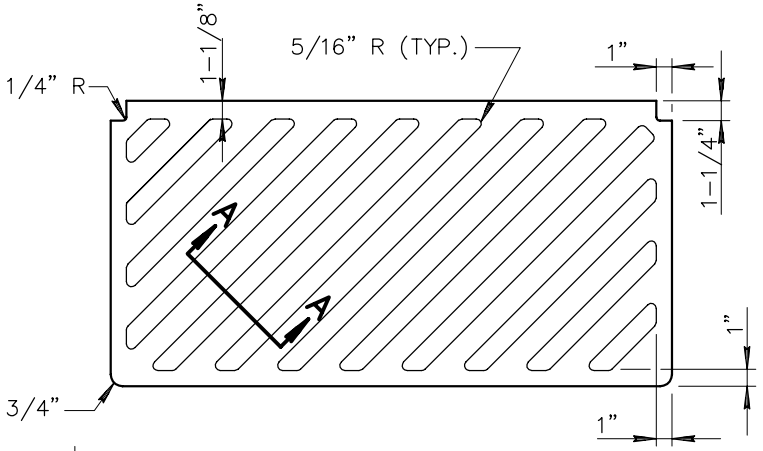

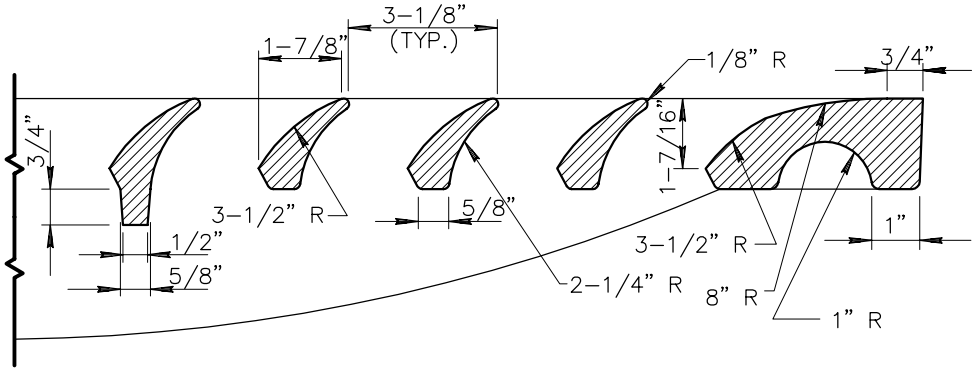

VANE DETAIL

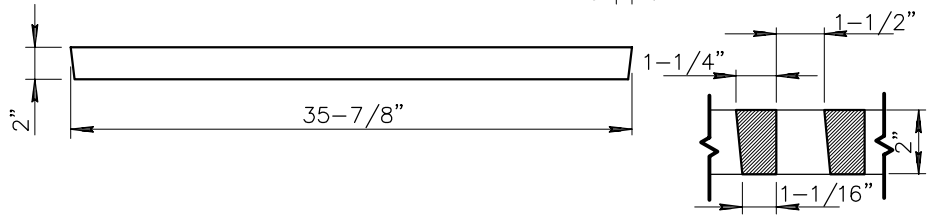

SECTION A-A

DETAIL NO.			REVISED	DETAIL NO.
534-5	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**ALTERNATE GRATE STYLES SUMP LOCATION**		534-5

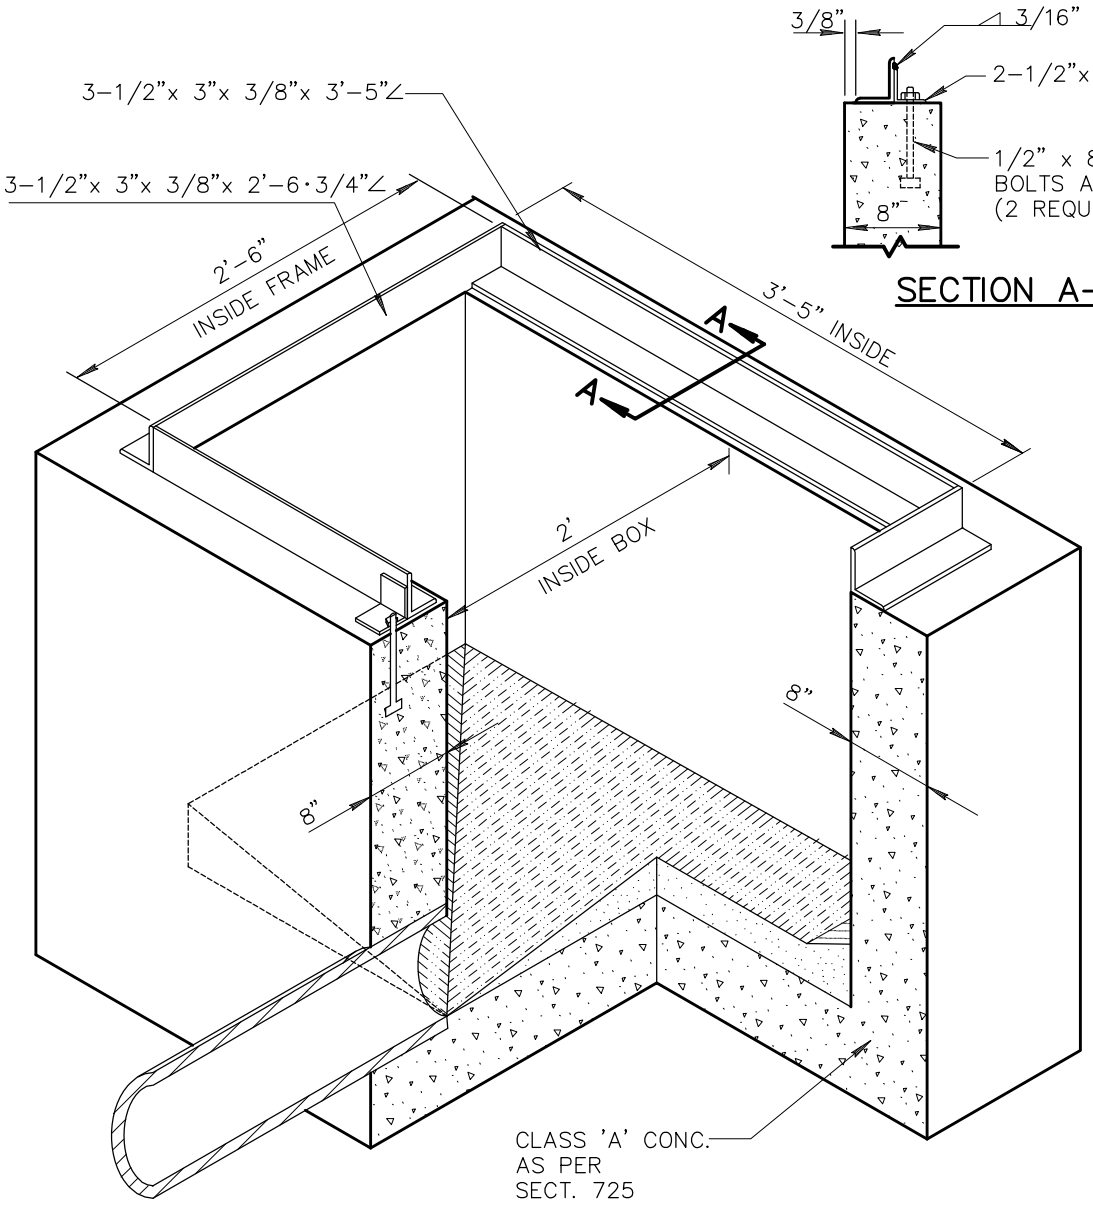

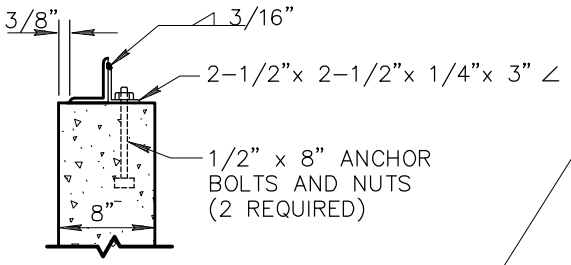

SECTION A-A

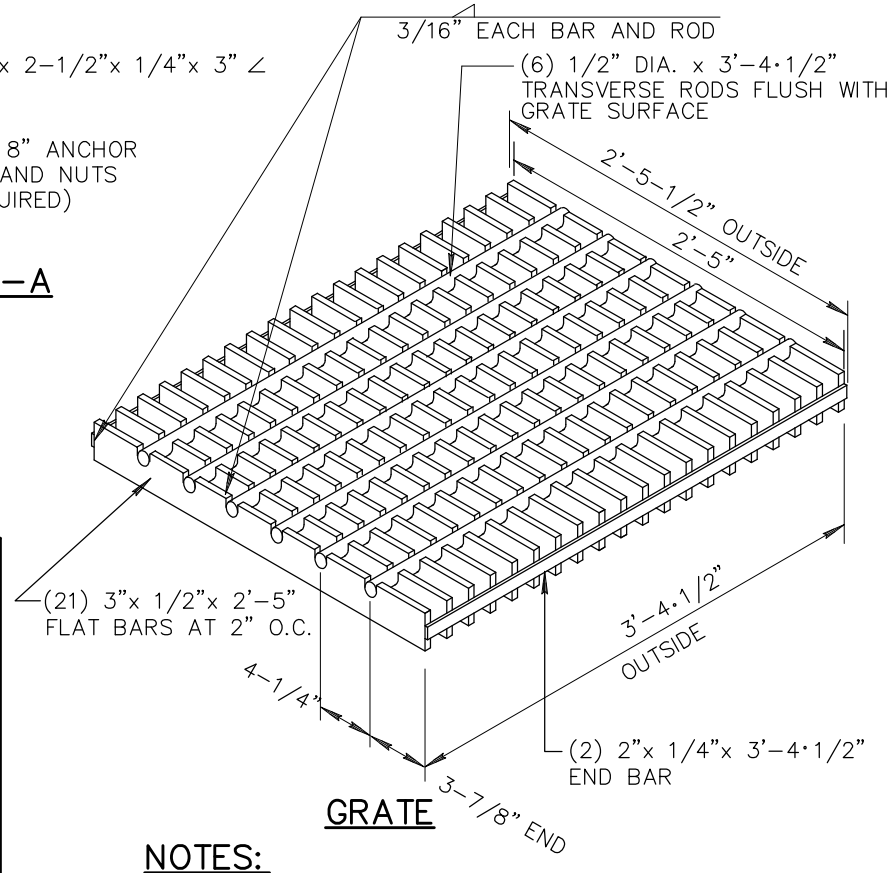

GRATE

NOTE:
SEE DETAIL 534-1 FOR THICKNESS AND SLOPE DIMENSIONS OF BOTTOM.

NOTES:

1. PIPES MAY ENTER OR LEAVE ANY WALL. BOTTOM OF BOX TO BE SLOPED TO OUTLET PIPE FROM ALL DIRECTIONS AND TROWELLED TO A HARD SMOOTH SURFACE.
2. CONNECTION PIPES MAY BE PLACED IN ANY POSITION AROUND THE WALLS PROVIDED THE POSITION IS CONSISTENT WITH THE PLAN.
3. OUTLET PIPE SHALL BE TRIMMED TO FINAL SHAPE AND LENGTH BEFORE CONCRETE IS POURED.
4. ALL STRUCTURAL STEEL TO BE PAINTED ONE SHOP COAT OF NO. 1 PAINT AND TWO FIELD COATS OF NO. 10 PAINT AS PER SECT. 790.
5. ALL WELDS ON FRAME AND SIDE BARS ON GRATE SHALL BE FULL LENGTH OF JOINT.
6. TOTAL COMBINED CLEARANCE BETWEEN FRAME AND GRATE IS 1/2".

DETAIL NO.				REVISED	DETAIL NO.
535	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CATCH BASIN TYPE 'F' (FOR USE WITHOUT CURB)		01-01-2008	535

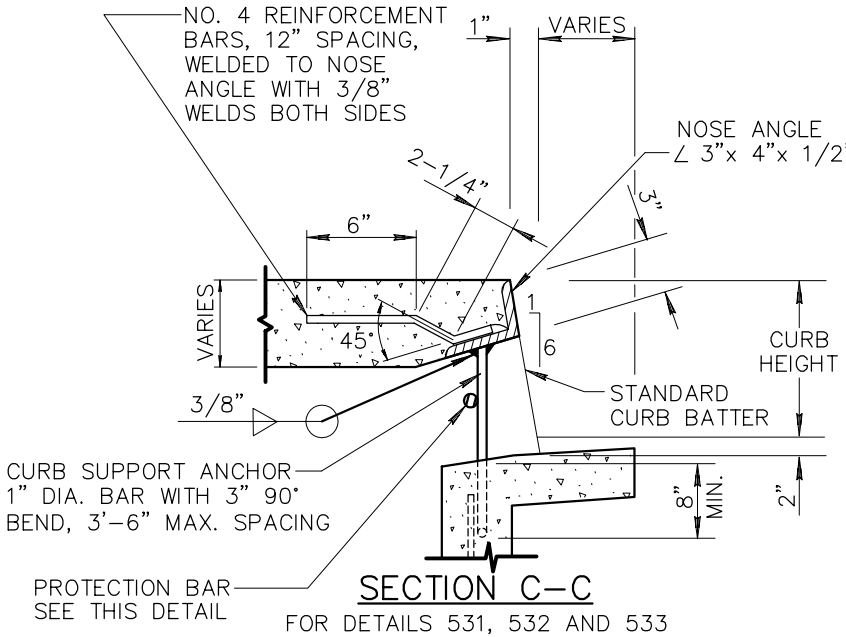

SECTION C–C

FOR DETAILS 531, 532 AND 533

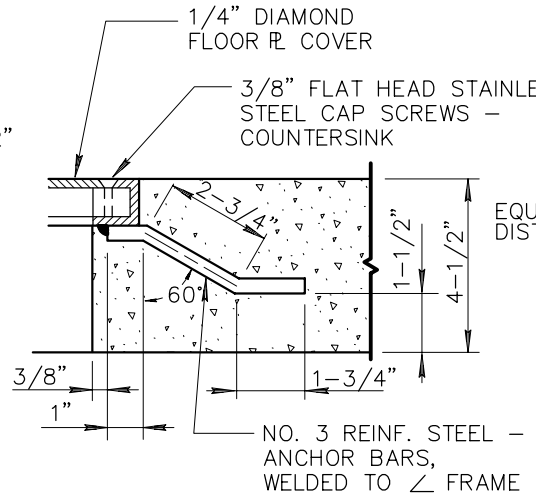

SECTION D–D

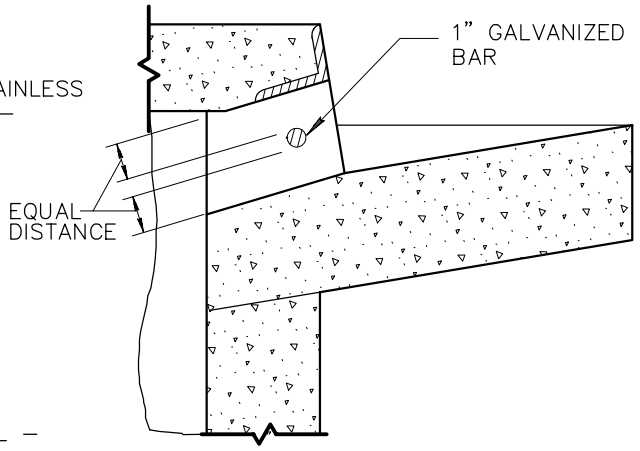

PROTECTION BAR

NOTES:

1) HORIZONTAL PLAIN ROUND GALVANIZED STEEL PROTECTION BAR SHALL BE USED WHEN CURB FACE IS 9" OR MORE.
2) THE BAR SHALL BE EMBEDDED 5" AT EACH END.

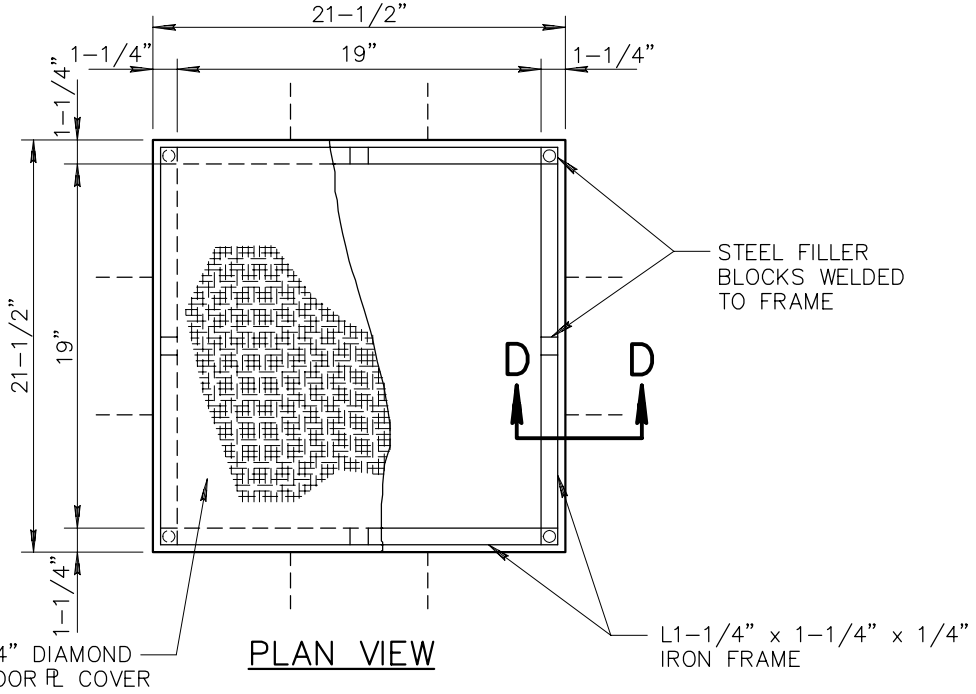

PLAN VIEW

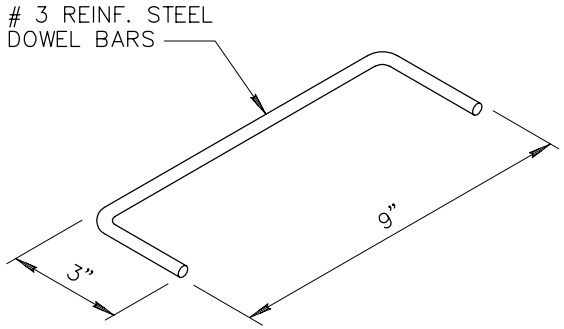

DOWEL BAR

DETAIL NO.				REVISED	DETAIL NO.
536–1	MARICOPA ASSOCIATION of GOVERNMENTS	STANDARD DETAIL ENGLISH	COMMON DETAILS AND SECTIONS FOR CURB OPENING CATCH BASINS		536–1

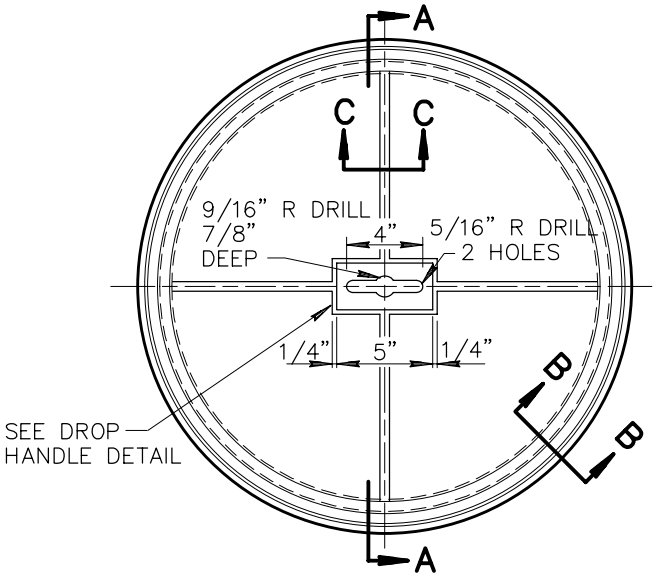

PLAN VIEW

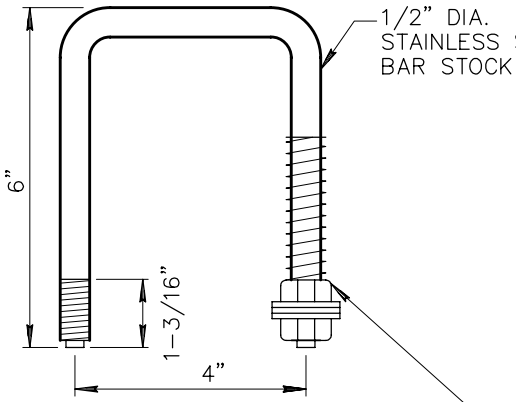

FURNISH FOR EACH SIDE OF HANDLE

1 EACH 304-S.STL. SPRING
2-1/2" x 17/32" I.C. x 3/32"

2 EACH 1/2" HEX NUT

3 EACH 1/2" FLAT WASHER

1 EACH 1/2" LOCK WASHER

DROP HANDLE

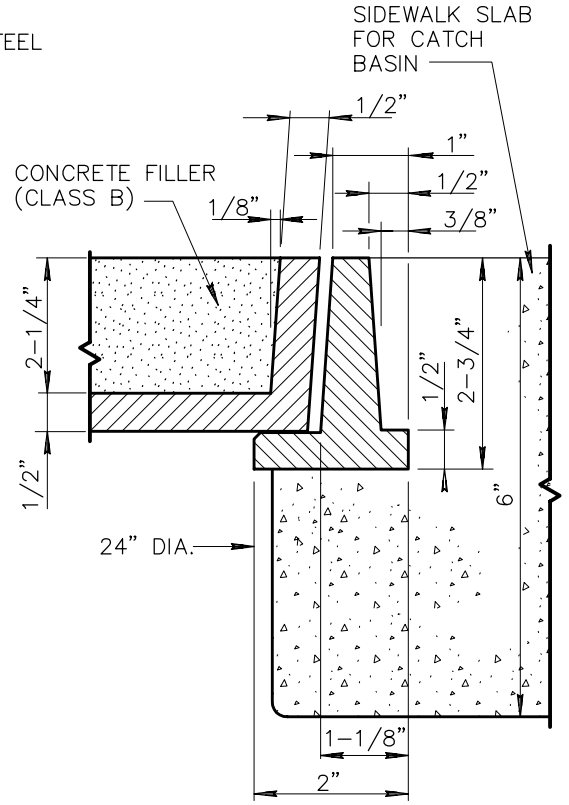

SECTION B-B

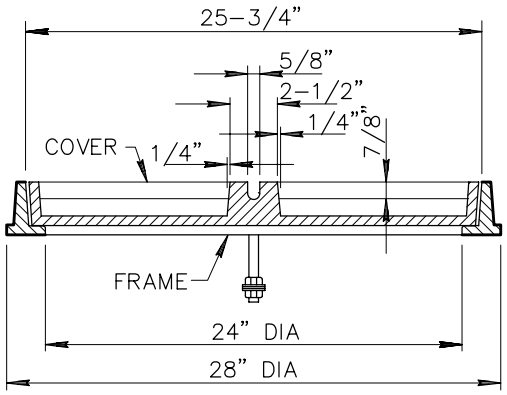

SECTION A-A



SECTION C-C

NOTES:

1. FRAME SHALL BE NON-LOCKING.
2. FRAME AND COVER SHALL BE CAST IRON OR ASTM A-36 STRL. HORIZONTIAL SURFACE OF COVER IN CONTACT WITH FRAME SHALL BE MACHINED. ASA B-46 ROUGHNESS SHALL NOT EXCEED 1/32".
3. COVER SHALL BE FILLED WITH CONCRETE AND BROOM FINISHED.
4. SMALL VARIATIONS IN DIMENSIONS OF FEATURES OF A MINOR NATURE THAT ARE PART OF THE FOUNDRY'S CASTING ARE PERMISSIBLE.

DETAIL NO.			REVISED	DETAIL NO.
536-2	MARICOPA ASSOCIATION of GOVERNMENTS — STANDARD DETAIL ENGLISH	ALTERNATE COVER FOR CURB OPENING CATCH BASINS		536-2

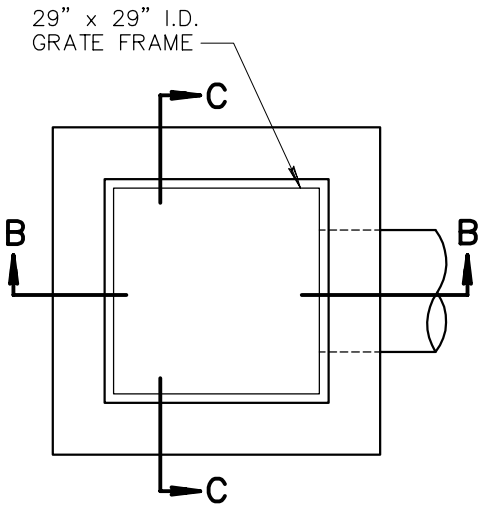

PLAN

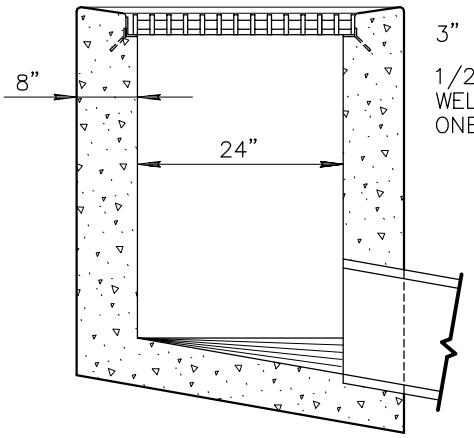

SECTION B–B

SINGLE GRATE

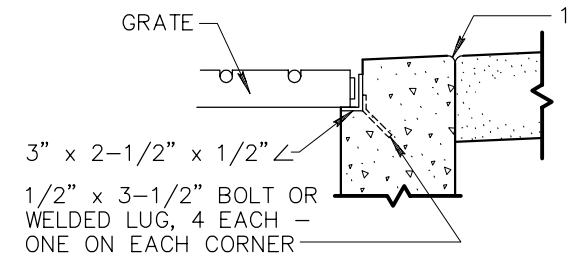

DETAIL OF ANGLE FRAME
GRATE SUPPORT

ALL CONCRETE SHALL BE CLASS 'A' PER SECT. 725. EXPOSED EDGES SHALL BE FINISHED WITH A 1/2" RADIUS.

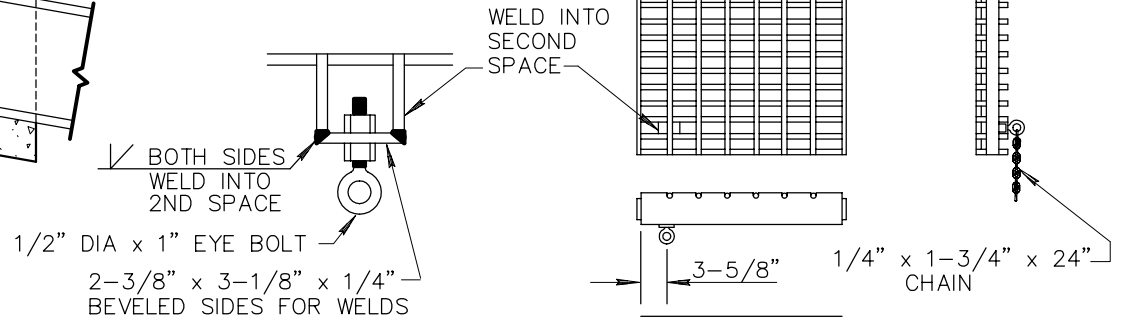

BAR GRATE
SEE DETAIL 539

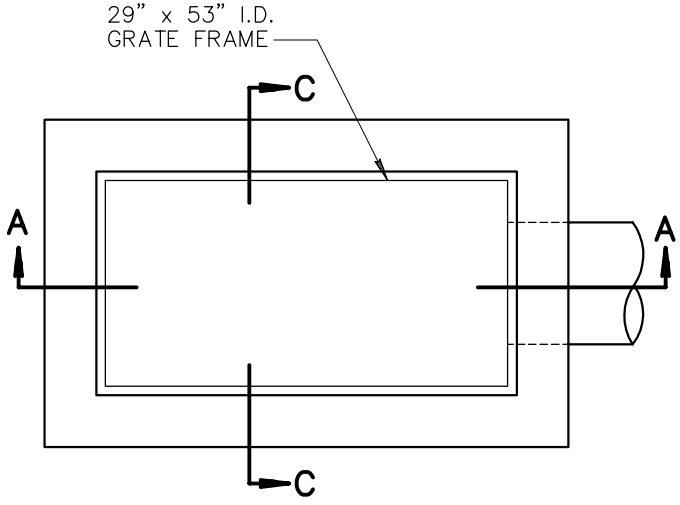

PLAN

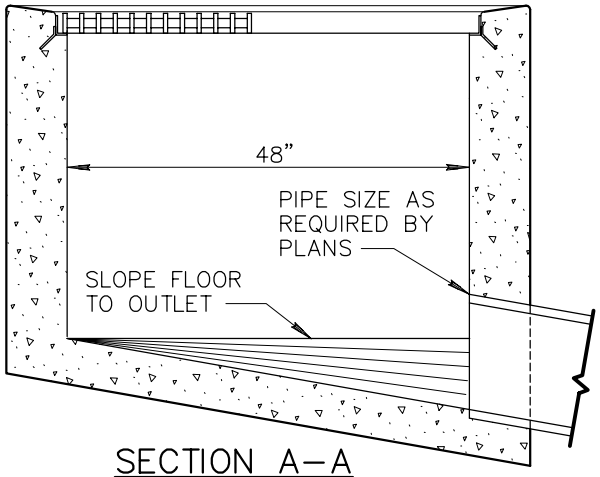

SECTION A–A

DOUBLE GRATE

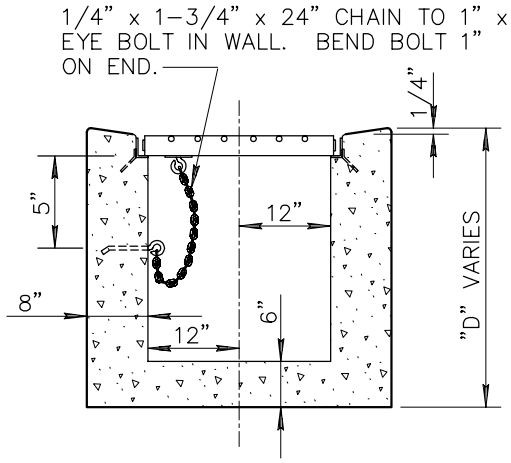

SECTION C–C

DETAIL NO.			REVISED	DETAIL NO.
537	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CATCH BASIN – TYPE 'G'	01–03–2002	537

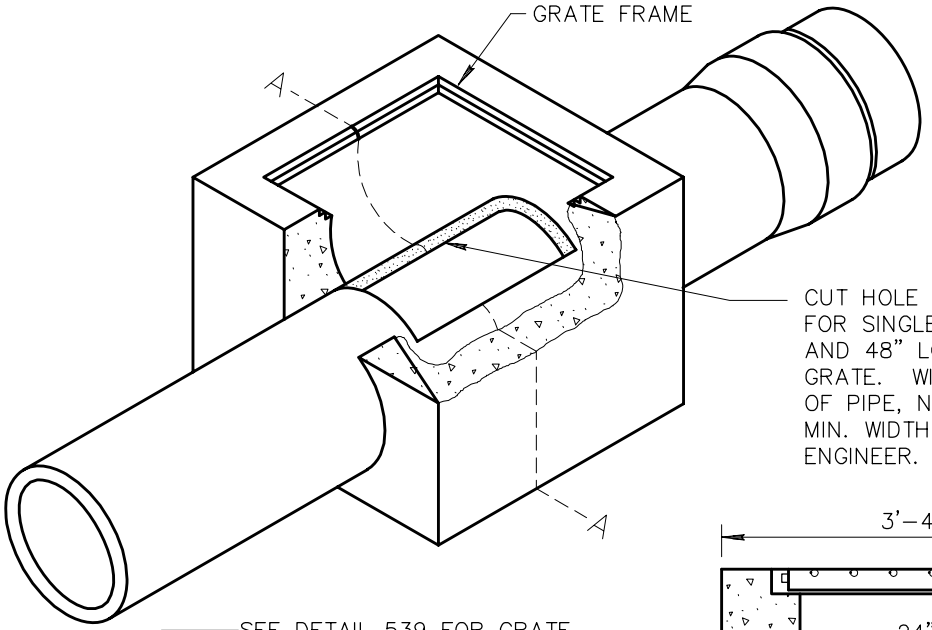

WHEN DOUBLE GRATE IS USED INCREASE THE LENGTH OF THE STRUCTURE ACCORDINGLY.

CUT HOLE IN PIPE 24" LONG FOR SINGLE GRATE STRUCTURES AND 48" LONG FOR DOUBLE GRATE. WIDTH DEPENDS ON DIA. OF PIPE, NOT TO EXCEED 22" MIN. WIDTH TO BE SET BY PROJECT ENGINEER.

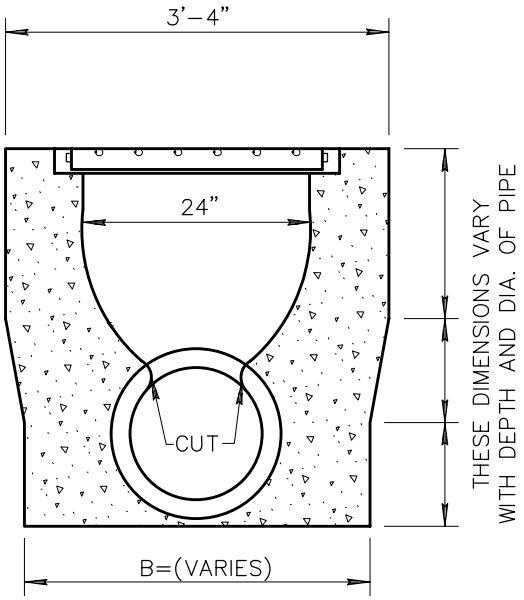

SECTION A-A

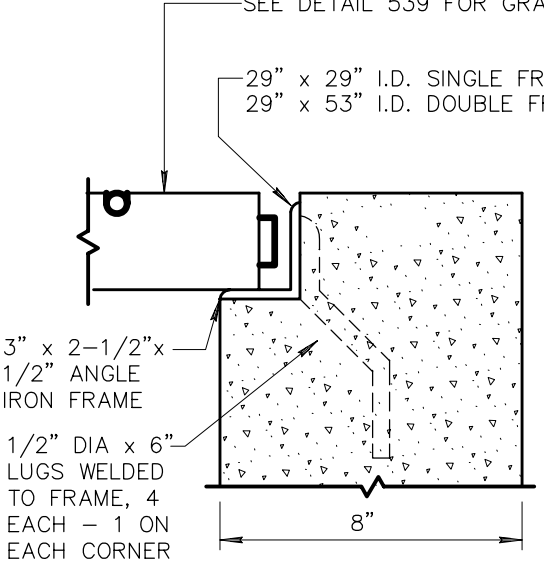

DETAIL OF ANGLE FRAME GRATE SUPPORT

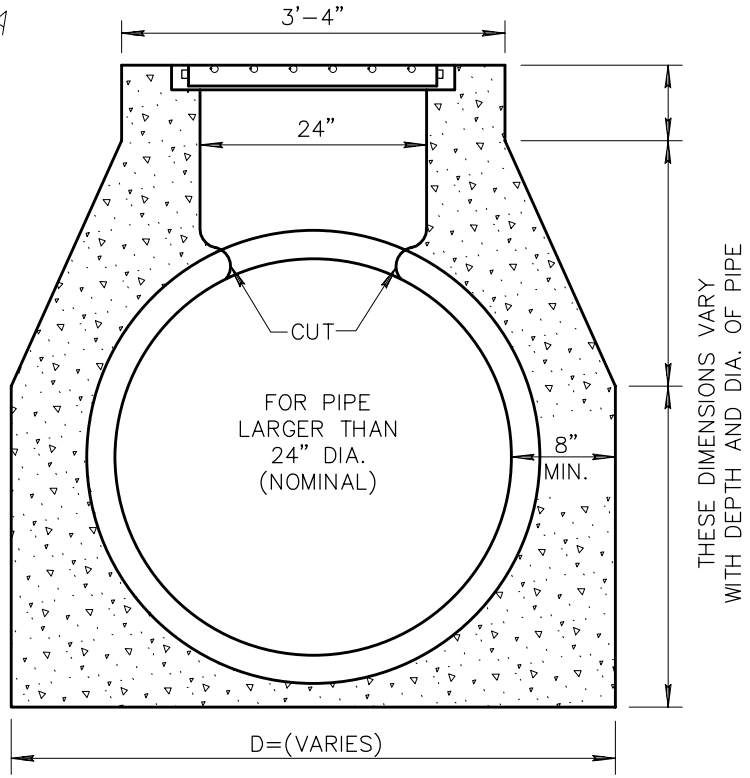

SECTION A-A

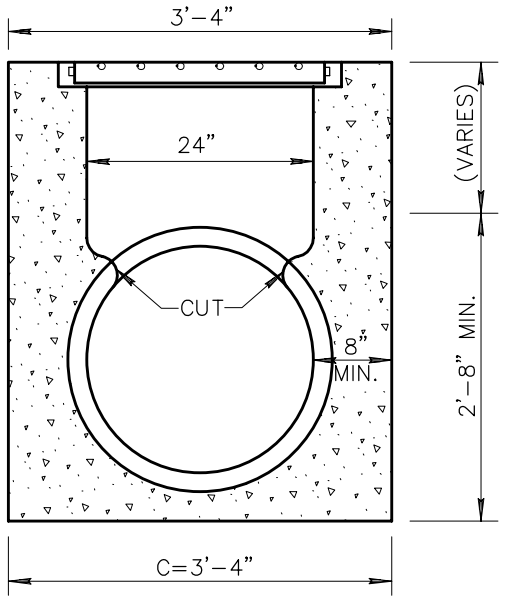

SECTION A-A
24" PIPE (NOMINAL)

DETAIL NO.				REVISIONS	DETAIL NO.
538	MARICOPA ASSOCIATION of GOVERNMENTS	STANDARD DETAIL ENGLISH	CATCH BASIN - TYPE 'H'		538

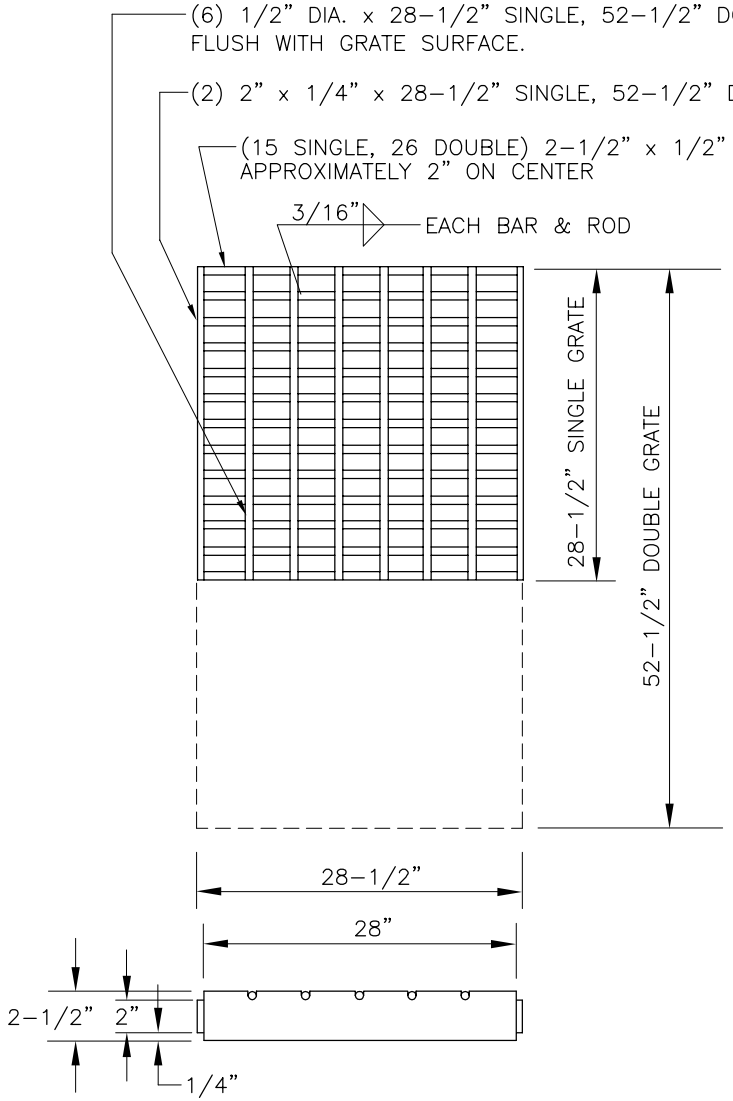

NOTES:

1. ALL STEEL SHALL BE IN ACCORDANCE WITH A.S.T.M. A-36.
2. WELDING SHALL BE IN ACCORDANCE WITH A.W.S. SPECIFICATIONS.
3. FRAME AND GRATE SHALL BE TESTED FOR ACCURACY OF FIT AND SHALL BE MARKED IN SETS BEFORE DELIVERY.
4. THE COMPLETED ASSEMBLY SHALL BE GIVEN ONE SHOP COAT OF NO. 1 PAINT AND TWO FIELD COATS OF NO. 10 PAINT AS PER SECTION 790.
5. THE GRATE SHALL BE FABRICATED TO WITHIN 1/8" SPECIFIED DIMENSIONS.

DETAIL NO.			REVISED	DETAIL NO.
539	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	GRATES FOR CATCH BASINS, TYPE G AND H		539

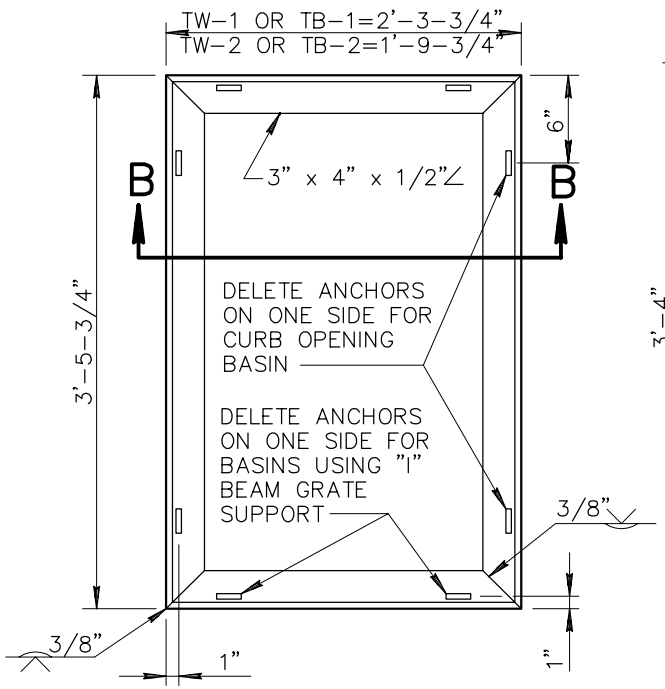

PLAN I

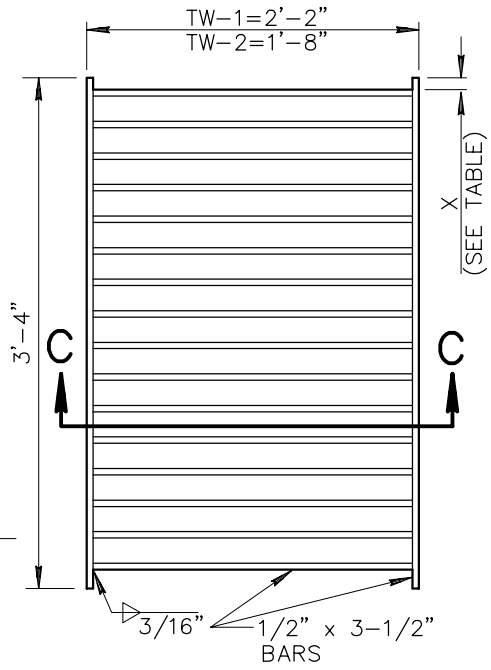

PLAN IA

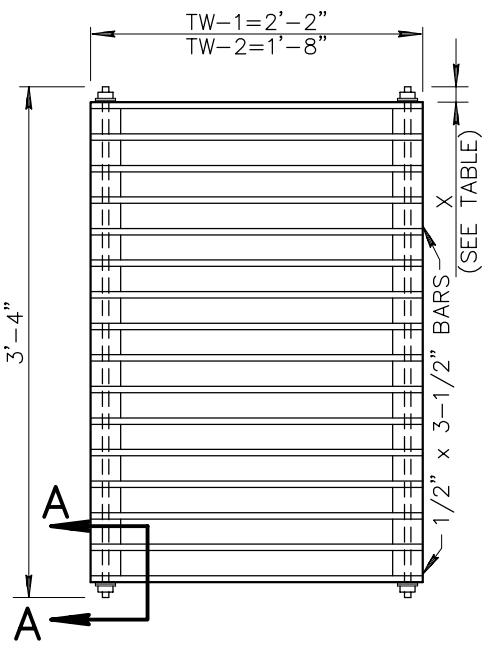

PLAN IB

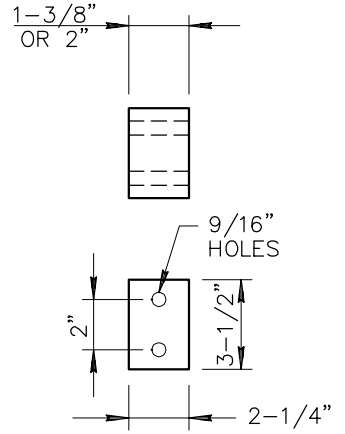

CAST IRON, CAST STEEL OR STEEL BAR STOCK

BAR SPACER DETAIL

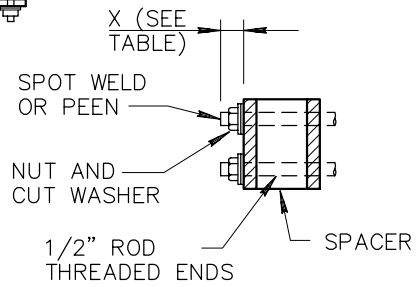

SECTION A–A

GRATE TYPES TB–1 AND TB–2

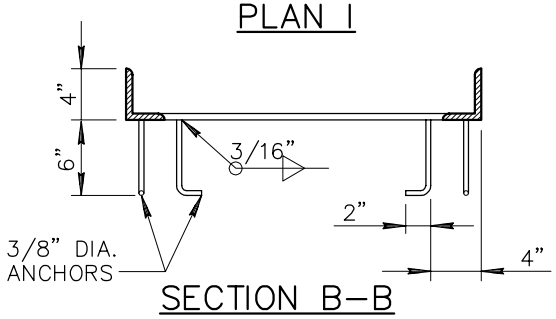

SECTION B–B

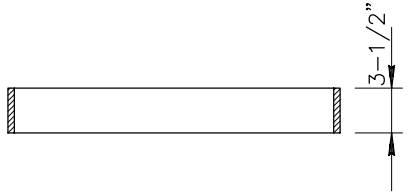

SECTION C–C

GRATE TYPES TW–1 AND TW–2

NOTES:

1. GRATING UNITS AND FRAMES SHALL BE FABRICATED FROM STRUCTURAL STEEL EXCEPT AS NOTED.
2. WELDING SHALL BE IN ACCORDANCE WITH STD. WELDING SPECS.
3. THE COMPLETED ASSEMBLY SHALL BE GIVEN TWO SHOP COATS OF NO. 1 PAINT AS PER SECT. 790.
4. FRAME AND GRATE SHALL FIT TO A MAX. ROCK OF 0.093" AT ANY POINT.
5. RESTRICT USE TO GRADES OF 3% OR LESS.

BAR TABLE				
TYPE	CLEAR SPACING	NO. BARS	X	GRATE OPENING ft^2
TW OR TB–1.0	1"	26	1"	3.21
TW OR TB–1.1	1–3/8"	21	1"	3.32
TW OR TB–1.2	2"	16	1"	4.66
TW OR TB–2.0	1"	26	1"	2.32
TW OR TB–2.1	1–3/8"	21	1"	2.41
TW OR TB–2.2	2"	16	1"	2.65

TW INDICATES TRANSVERSE WELDED
TB INDICATES TRANSVERSE BOLTED

DETAIL NO.			REVISED	DETAIL NO.
540-1	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CATCH BASIN GRATES		540-1

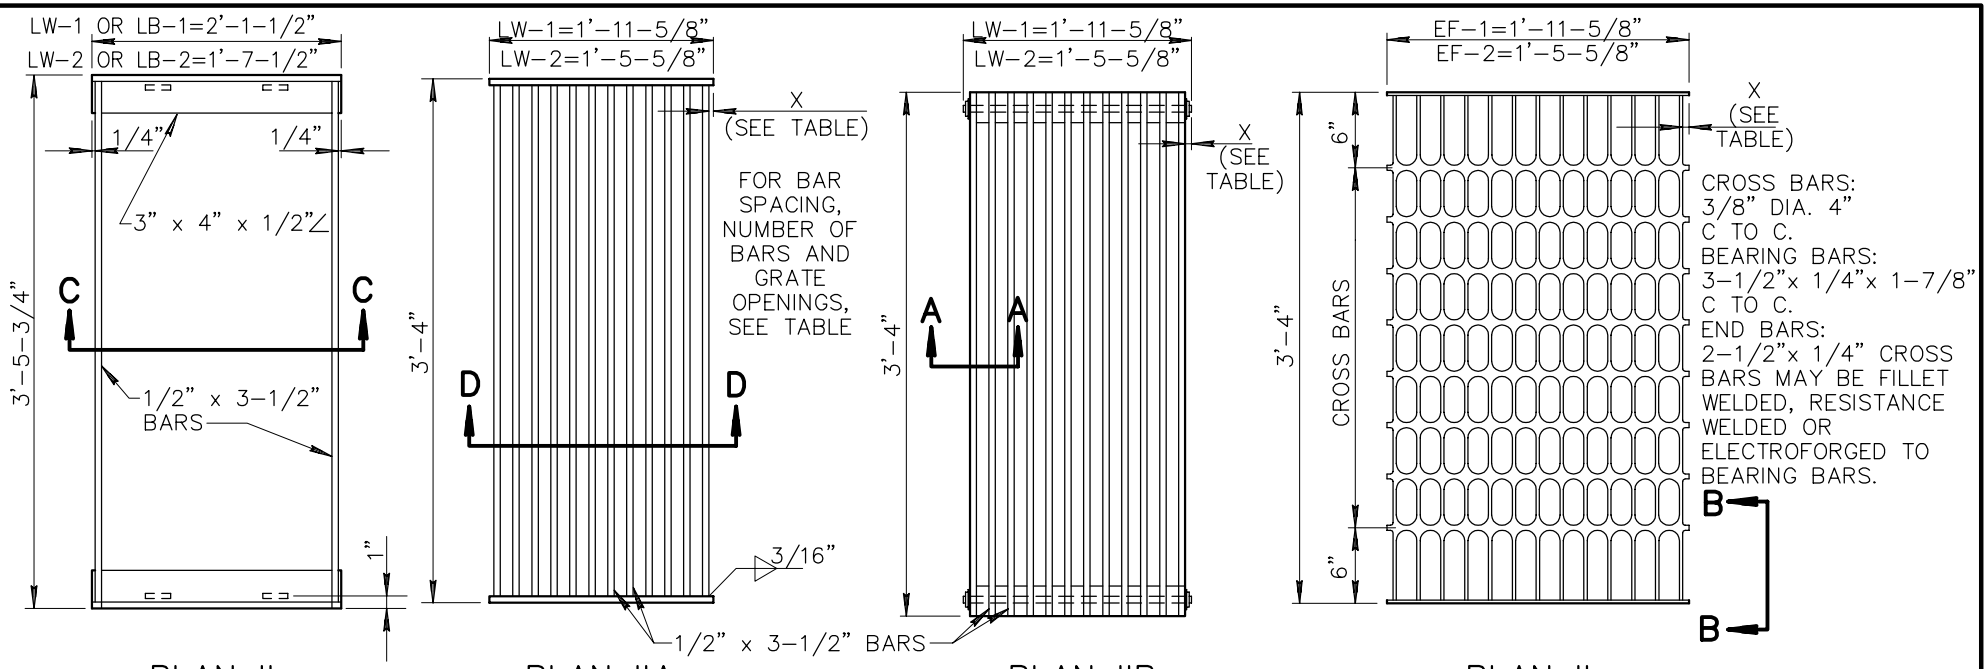

PLAN II

PLAN IIA

PLAN IIB

PLAN II

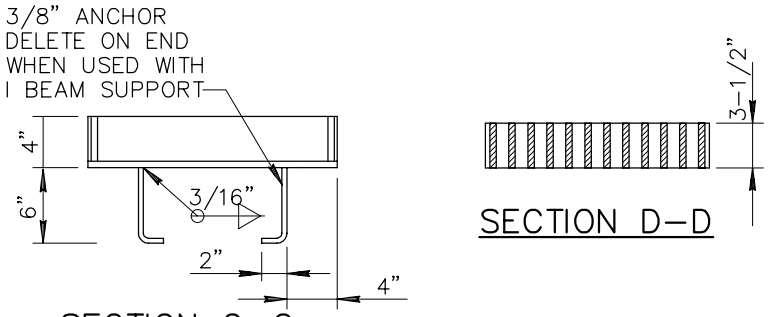

SECTION C–C

SECTION D–D

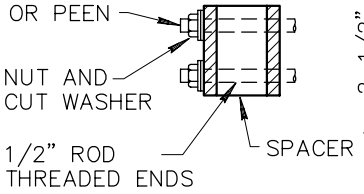

SECTION A–A



SECTION B–B

GRATE TYPE	CLEAR BAR SPACING	NO. BARS	X	GRATE OPENING ft^2
LW OR LB–1.0	1"	16	5/16"	3.97
LW OR LB–1.1	1–3/8"	13	5/16"	4.34
LW OR LB–1.2	2"	9	1–9/16"	4.84
EF–1	1–5/8"	13	7/16"	4.66
LW OR LB–2.0	1"	12	5/16"	2.98
LW OR LB–2.1	1–3/8"	9	1–1/16"	3.35
LW OR LB–2.2	2"	7	1–1/16"	3.60
EF–2	1–5/16"	10	1/4"	3.48

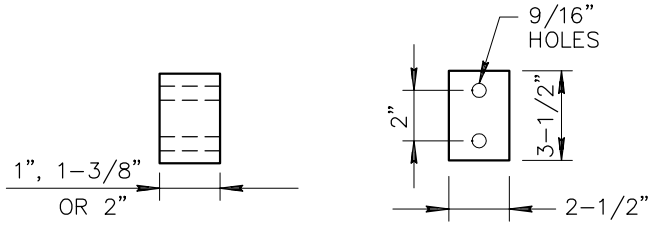

BAR SPACER DETAIL

CAST IRON, CAST STEEL OR STEEL BAR STOCK

NOTES:

1. LW INDICATES LONGITUDINAL WELDED.
2. LB INDICATES LONGITUDINAL BOLTED.
3. EF INDICATES ELECTROFORGED.
4. GRATING UNITS AND FRAMES SHALL BE FABRICATED FROM STRUCTURAL STEEL 'A–36 EXCEPT AS NOTED.
5. ALL WELDING SHALL BE IN ACCORDANCE WITH STANDARD WELDING SPECIFICATIONS.
6. THE COMPLETED ASSEMBLY SHALL BE GIVEN ONE SHOP COAT OF NO. 1 PAINT.
7. FRAMES AND GRATES SHALL FIT TO A MAXIMUM ROCK OF 0.093" AT ANY POINT.
8. GRATE TYPE LW AND EF RESTRICTED TO SLOPES OF 3% OR LESS
9. GRATES TYPE LB USE LONGITUDINAL GRADES IN EXCESS OF 3% OR AS AN ALTERNATE TO TYPES LW OR EF ON GRADES OF 3% OR LESS.

DETAIL NO.			REVISED	DETAIL NO.
540-2	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CATCH BASIN GRATES		540-2

NOTES:

1. INSTALL WHEN REQUIRED BY PLANS, SPECIFICATIONS, OR APPROVED BY THE ENGINEER.
2. SEE PROJECT PLANS FOR CATCH BASIN DETAILS AND PAVEMENT STRUCTURAL SECTION.

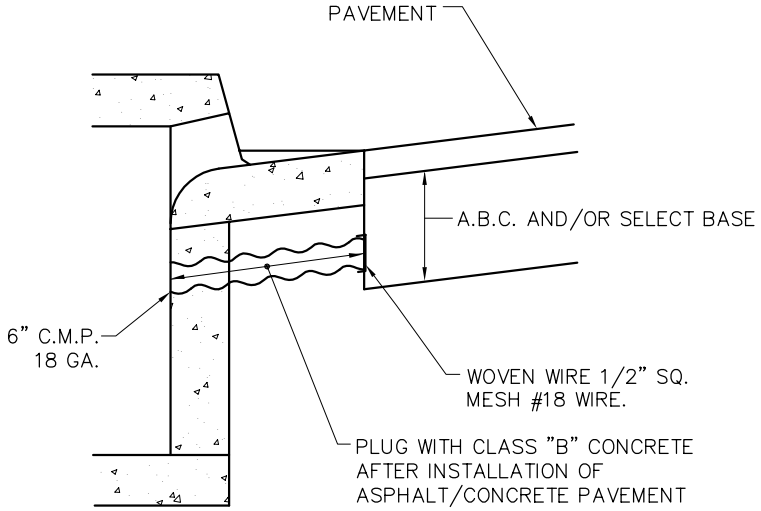

CURB OPENING INLET

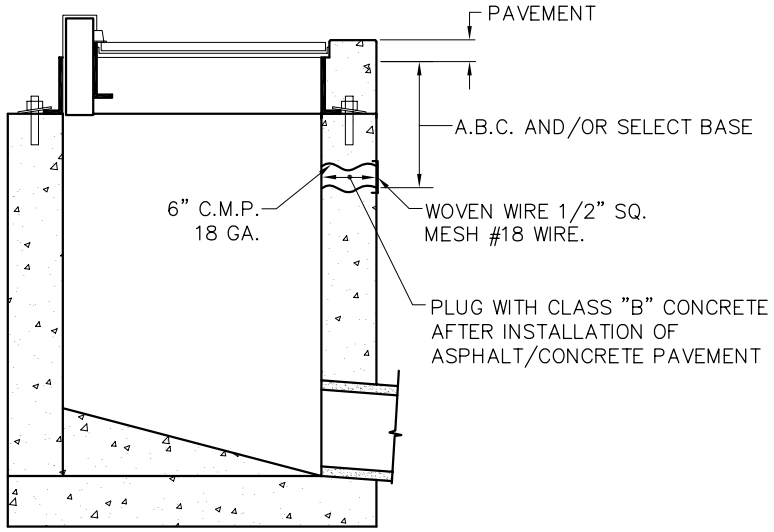

GRATE OPENING INLET

DETAIL NO.			REVISED	DETAIL NO.
541	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	CATCH BASIN SUBGRADE DRAIN	01-01-2005	541

This Page Is Reserved for Future Use.

PIPE DIA.	APPROX. WEIGHT (LBS.)	DIMENSIONS – INCHES						APPROX. SLOPE
		T	A	B	C	E	F	
24"	1520	3	9–1/2	43–1/2	30	73–1/2	48	3
27"	1930	3–1/4	10–1/2	49–1/2	24	73–1/2	54	3
30"	2190	3–1/2	12	54	19–3/4	73–3/4	60	3
36"	4100	4	15	63	34–3/4	97–3/4	72	3
42"	5380	4–1/2	21	63	35	98	78	3
48"	6550	5	24	72	26	98	84	3
54"	8240	5–1/2	27	65	33–1/4	98–1/4"	90	2 1/2

NOTES

1. DESIGN OF END SECTION SHALL CONFORM TO STANDARD FOR REINFORCED CONCRETE PIPE.
2. END SECTION JOINT CONFORMATION SHALL MATCH THE PIPE JOINTS.
3. EMBANKMENT SLOPE SHALL BE WARPED TO MATCH SLOPE OF END SECTION.
4. CULVERT LENGTH IS AS SHOWN ON PLANS.

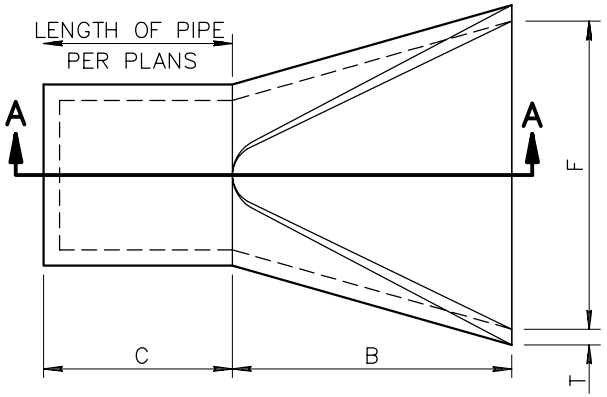

PLAN



SPACING FOR MULTIPLE INSTALLATION

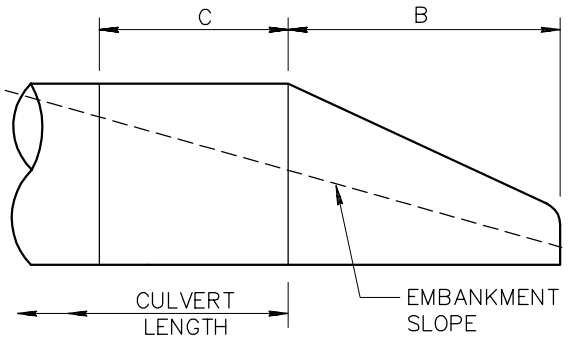

RIGHT ANGLE CULVERT

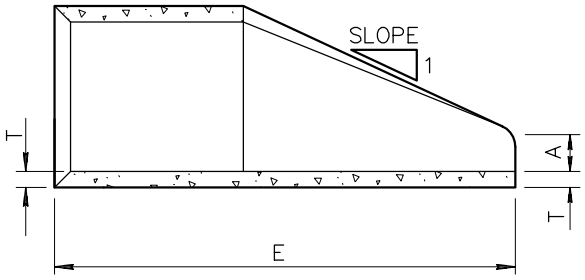

SECTION A–A

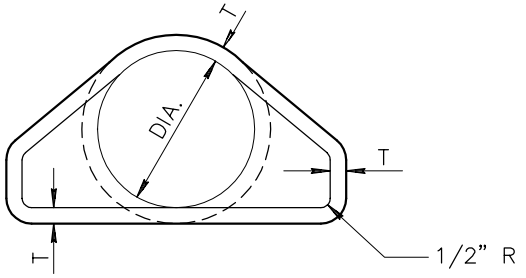

FRONT ELEVATION

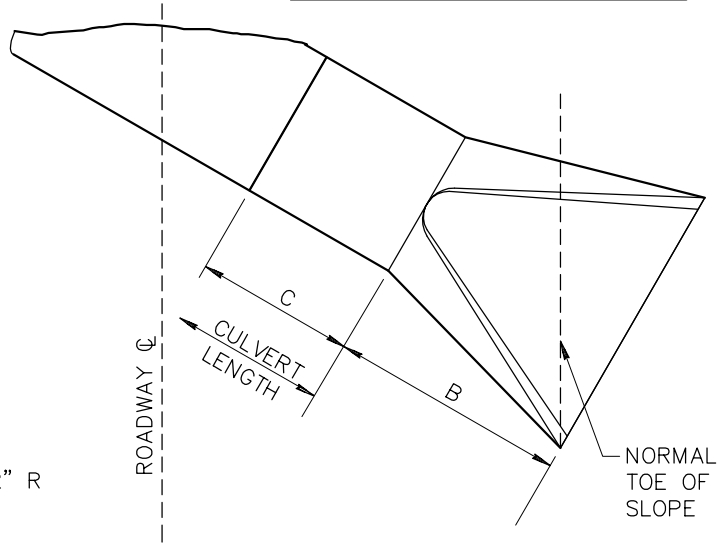

SKEWED CULVERT

DETAIL NO.			REVISED	DETAIL NO.
545	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	END SECTION-REINFORCED CONCRETE PIPE		545

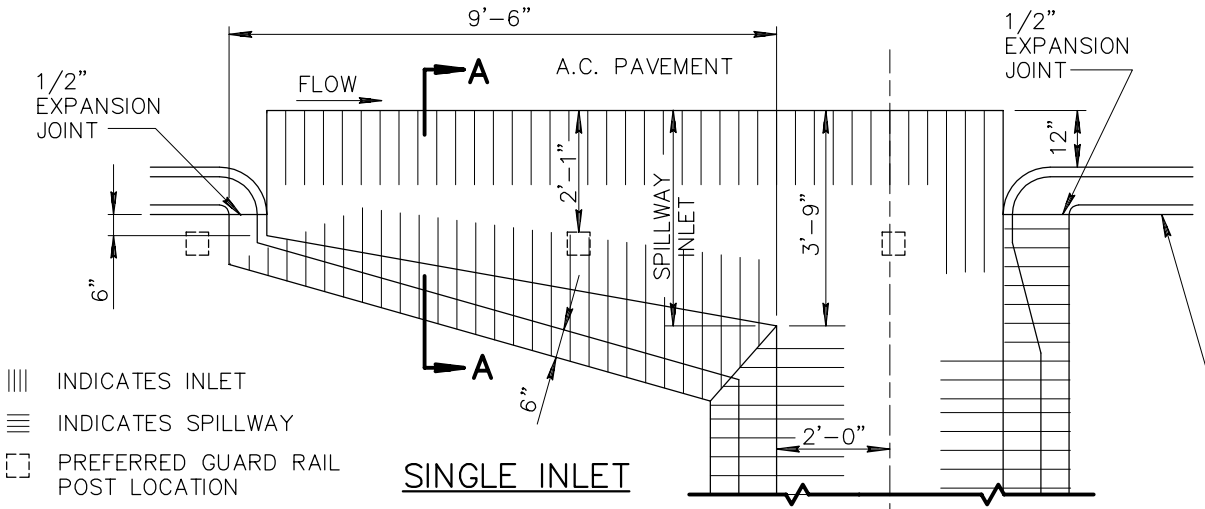

SINGLE INLET

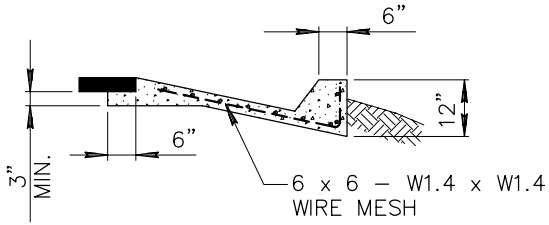

SECTION A–A

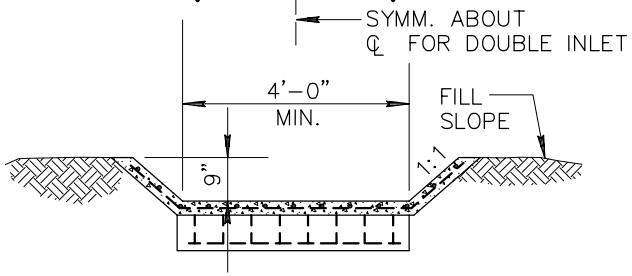

NOTES:

1. WHERE ROCK IS ENCOUNTERED THE OUTLET MAY BE OMITTED.
2. ALL PORTIONS OF SPILLWAY TO BE TROWEL FINISHED.
3. CONCRETE FOR THE SPILLWAY INLET, SPILLWAY AND OUTLET SHALL BE CLASS 'B' PER SECT. 725.
4. WHEN THE OUTLET IS USED, THE WIRE MESH SHALL EXTEND THROUGH THE JOINT INTO THE OUTLET IN LIEU OF BENDING INTO THE KEY.

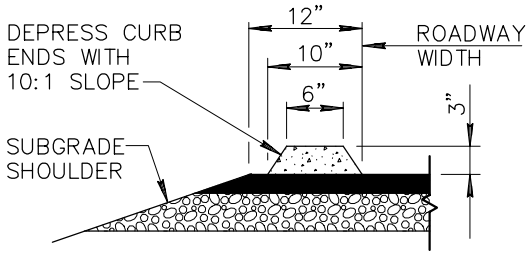

EMBANKMENT CURB/EXTRUDED (OPTIONAL)

SPILLWAY SECTION

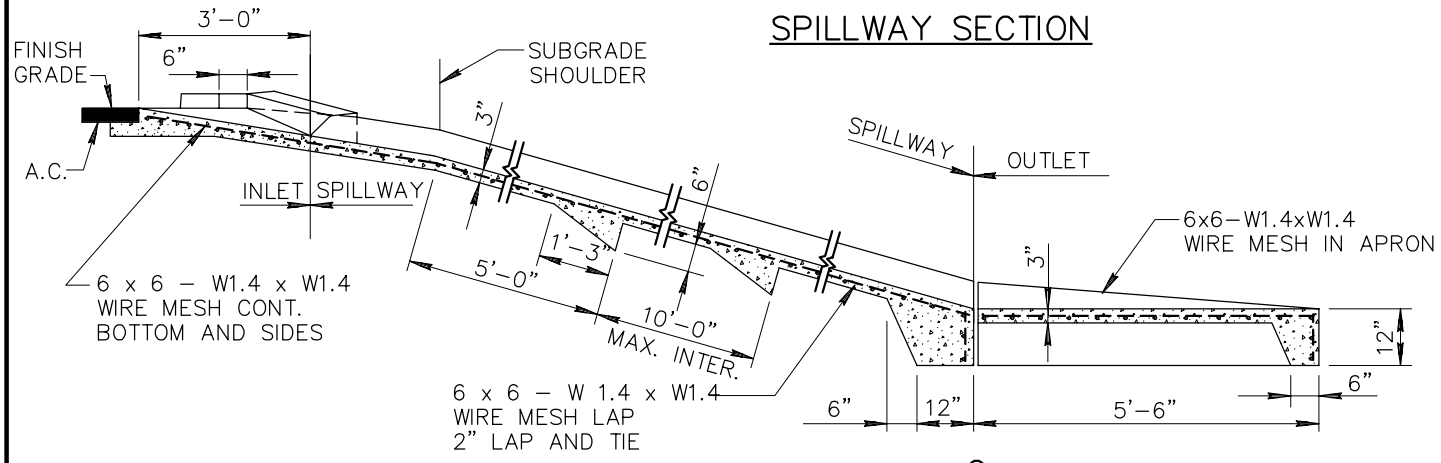

SECTION ON SPILLWAY ℄ DOUBLE INLET

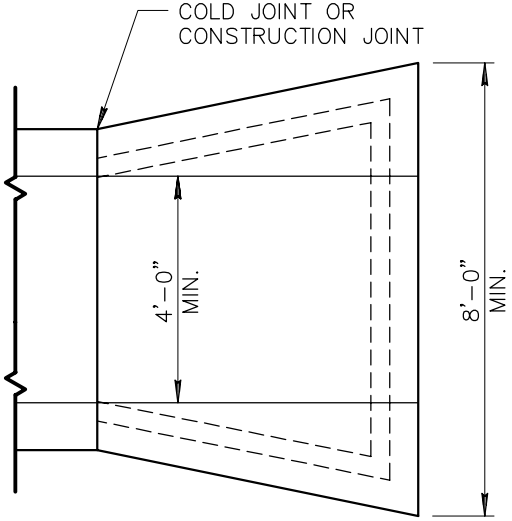

DETAIL NO.			REVISED	DETAIL NO.
550	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	SPILLWAY INLET AND OUTLET		550

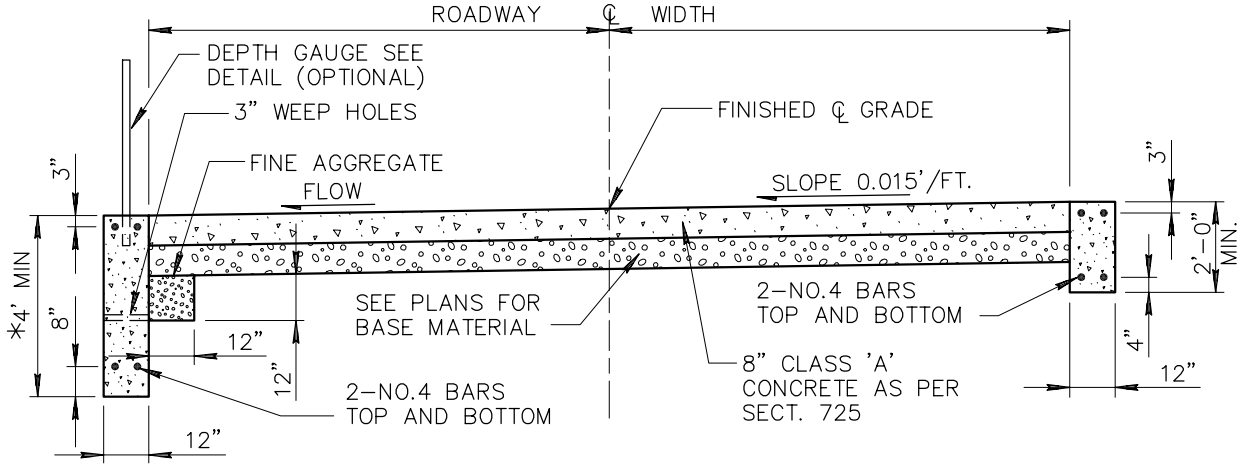

CONCRETE SURFACE FORD CONCRETE WALLS

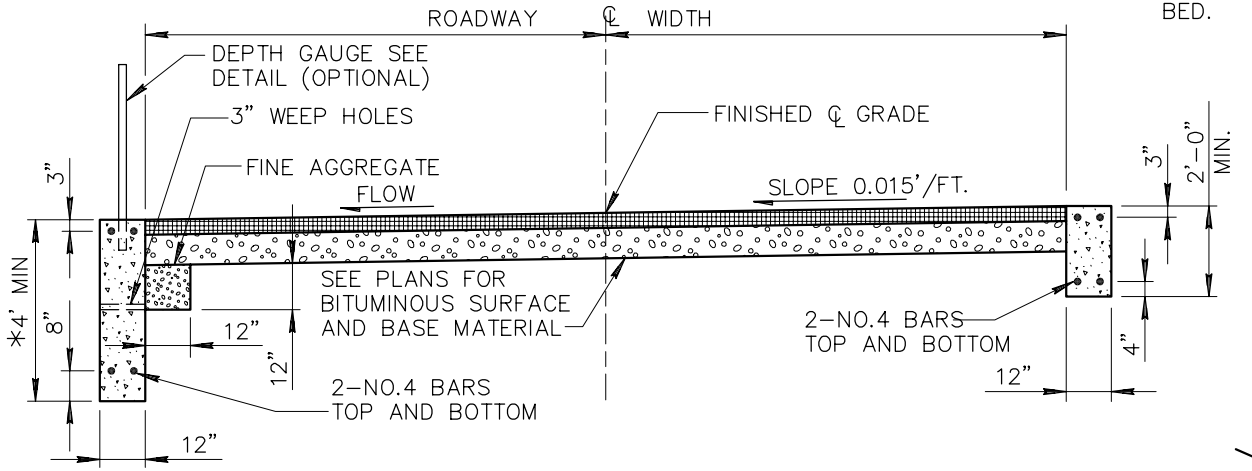

BITUMINOUS SURFACE FORD CONCRETE WALLS

*MIN. DISTANCE BELOW STREAM BED.

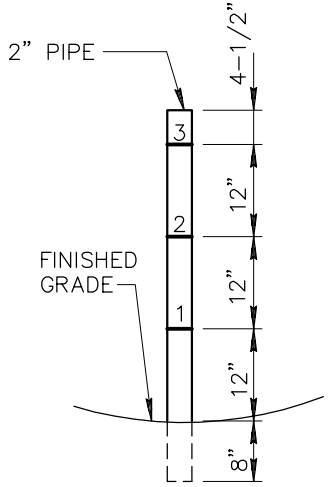

DEPTH GAUGE DETAIL

(OPTION OF THE CONTRACTING AGENCY)

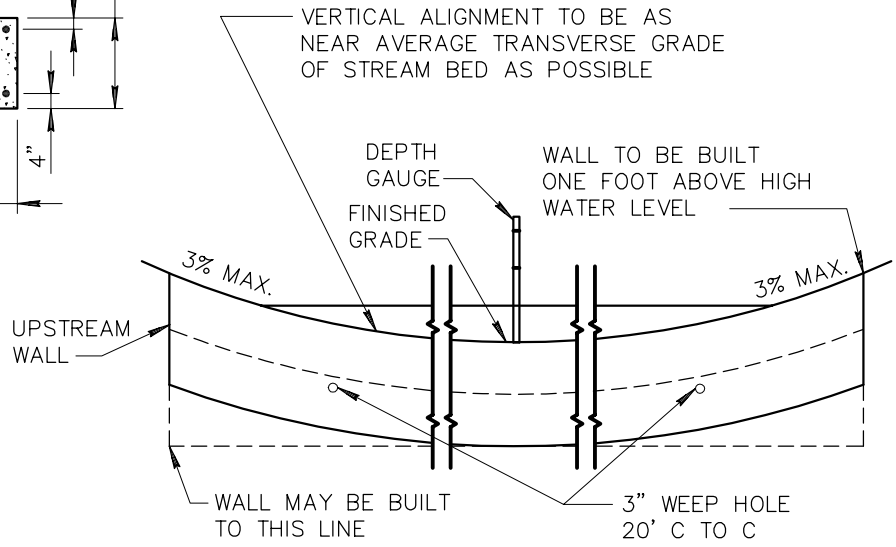

ELEVATION LOOKING UPSTREAM

NOTES:

1. FORD WALLS SHALL BE CLASS 'A' CONCRETE PER SECT. 725
2. DEPTH GAUGE SHALL BE PAINTED 2 COATS WHITE ENAMEL. NUMERALS AND MARKERS SHALL BE 1 COAT BLACK ENAMEL.
3. NUMBERS ON DEPTH GAUGE TO BE 2" HIGH.
4. HEIGHT OF DEPTH GAUGE OPTIONAL.
5. TWO DEPTH GAUGES MAY BE USED. ONE ON EACH END OF UPSTREAM WALL. START WITH 2' INSTEAD OF 1'

DETAIL NO.			REVISED	DETAIL NO.
552	MARICOPA ASSOCIATION of GOVERNMENTS **STANDARD DETAIL ENGLISH**	**CONCRETE CUT-OFF WALLS**		552

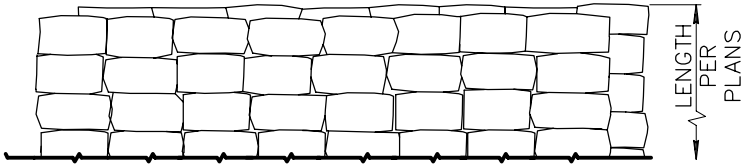

PLAN

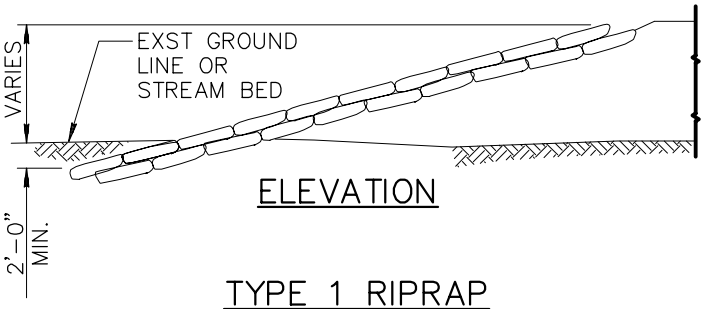

ELEVATION

TYPE 1 RIPRAP

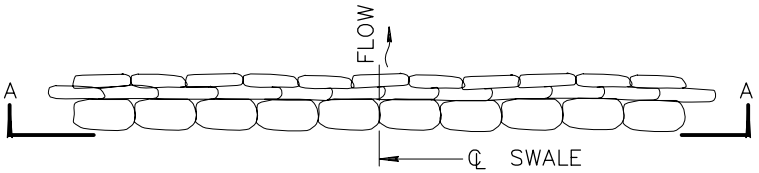

PLAN

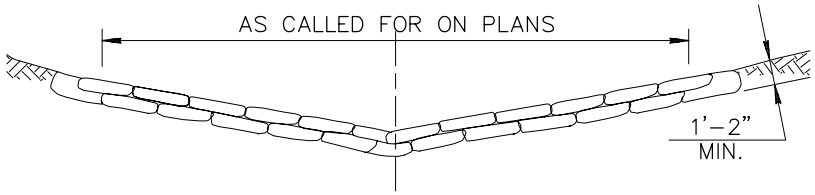

ELEVATION

TYPE 2 RIPRAP

TYPICAL GABIONS

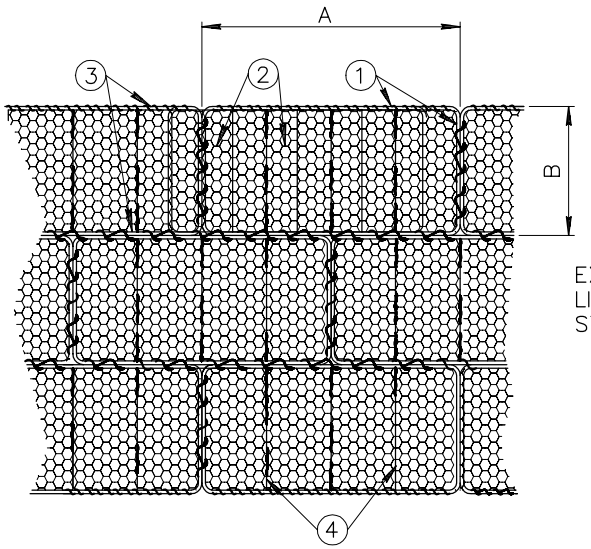

PLAN

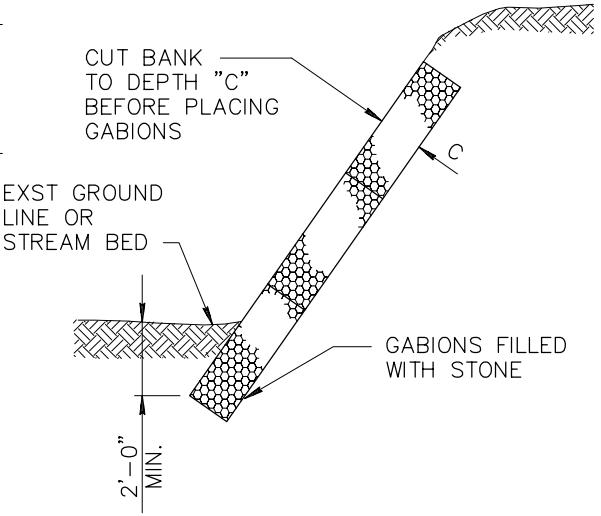

ELEVATION

1. HEAVY GAUGE FRAME WIRE.
2. HEAVY GAUGE TRIPLE-TWIST HEXAGONAL MESH (OR EQUAL) FASTENED TO FRAME WIRE.
3. CONTINUOUS HEAVY GAUGE WRAPPED AROUND FRAMES TO FASTEN GABIONS TO EACH OTHER.
4. PARTITIONS TO PREVENT SHIFTING, NORMALLY ONE PER 3' LENGTH. INSTALLED AT FACTORY.

NOMINAL SIZE COMBINATIONS		
LENGTH	WIDTH	DEPTH
A	B	C
6'	3'	1', 1.5' 3'
9'	3'	1', 1.5' 3'
12'	3'	1', 1.5' 3'

OTHER SIZES AVAILABLE FROM MANUFACTURER.

NOTES:

1. PLAIN ROCK OR GROUTED ROCK MAY BE SUBSTITUTED FOR SACKED CONCRETE.
2. GROUT FOR RIPRAP MAY BE PNEUMATICALLY PLACED MORTAR.

DETAIL NO.			REVISED	DETAIL NO.
555	MARICOPA ASSOCIATION of GOVERNMENTS STANDARD DETAIL ENGLISH	EROSION PROTECTION / RIPRAP		555